




DRILLING, SCREW BITS, SAWING



**DIAGER**<sup>®</sup>  
PROFESSIONAL TOOLS MANUFACTURER



# A professional range

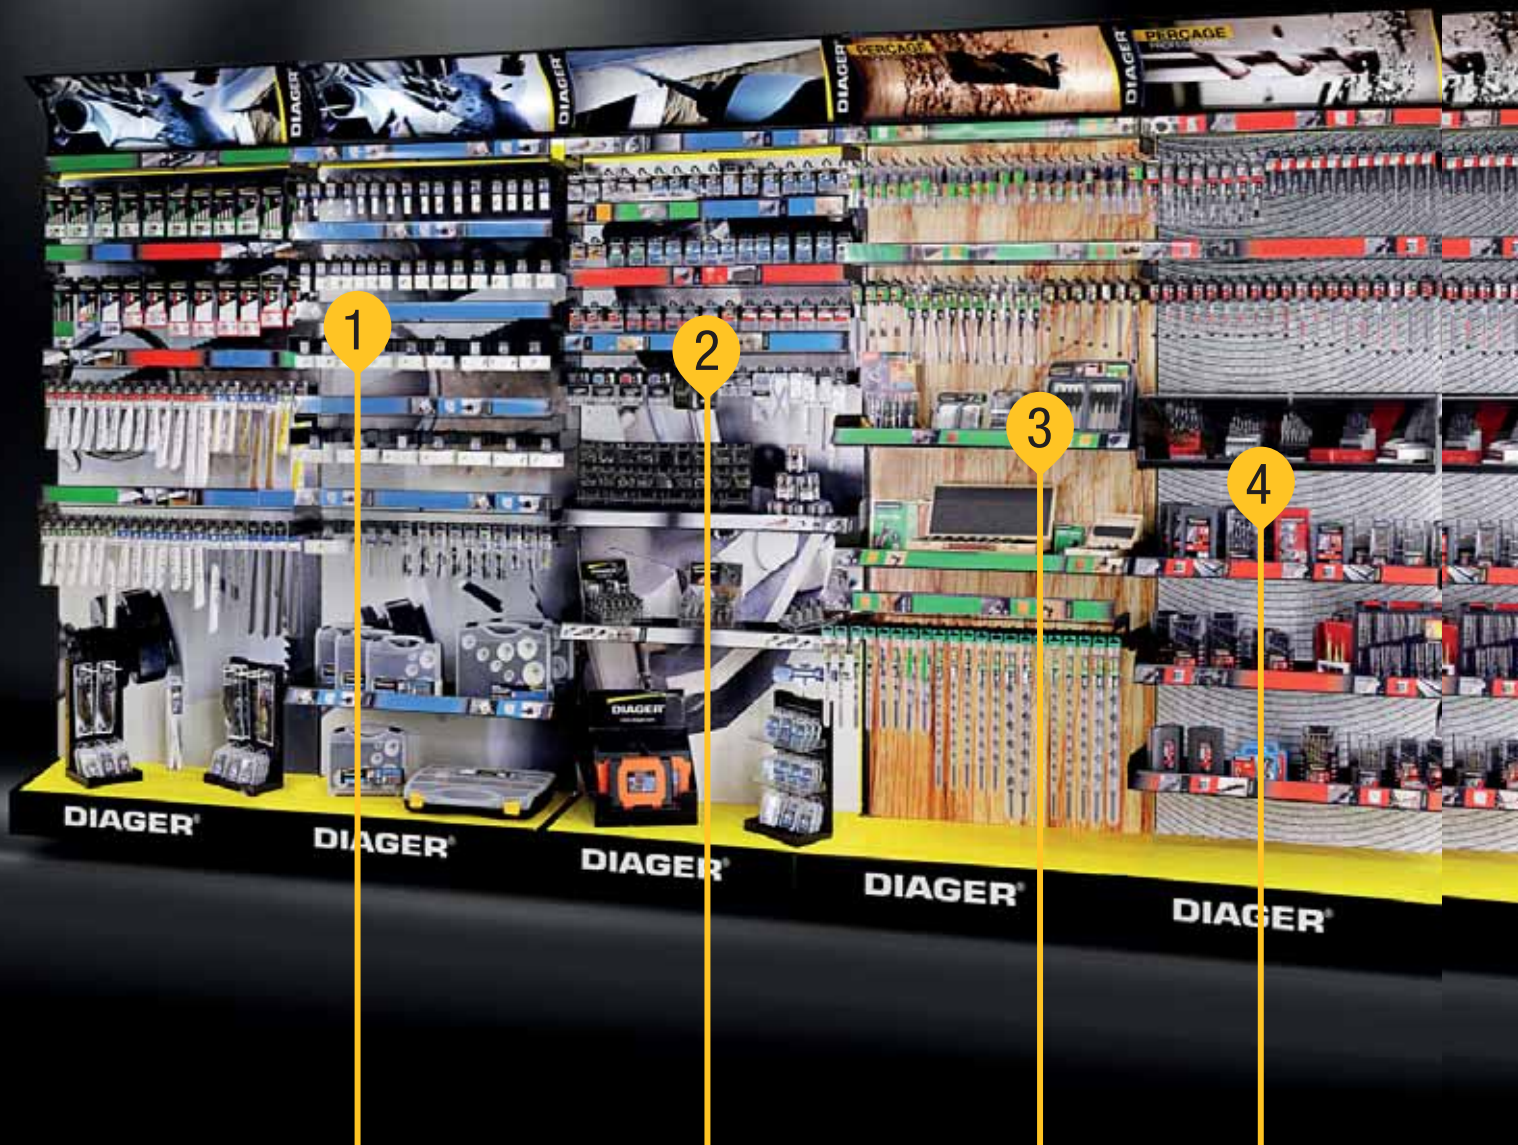

## SAWING

8% Cobalt holesaw, jigsaw blade and reciprocating saw blade.

## SCREW BITS

Bit holder, torsion screw bits for driller and impact driller, long series screw bits.

## PERÇAGE

### WOOD

Drill bits for hard wood and low density wood, auger bit, flat bit, decking kit, forstner bit and disc plug cutter.


## DRILLING

### METAL

Metal drill bit for steel and alloy steel, TCT HSS drill bit, tap, die, screw extractor.



# XXL

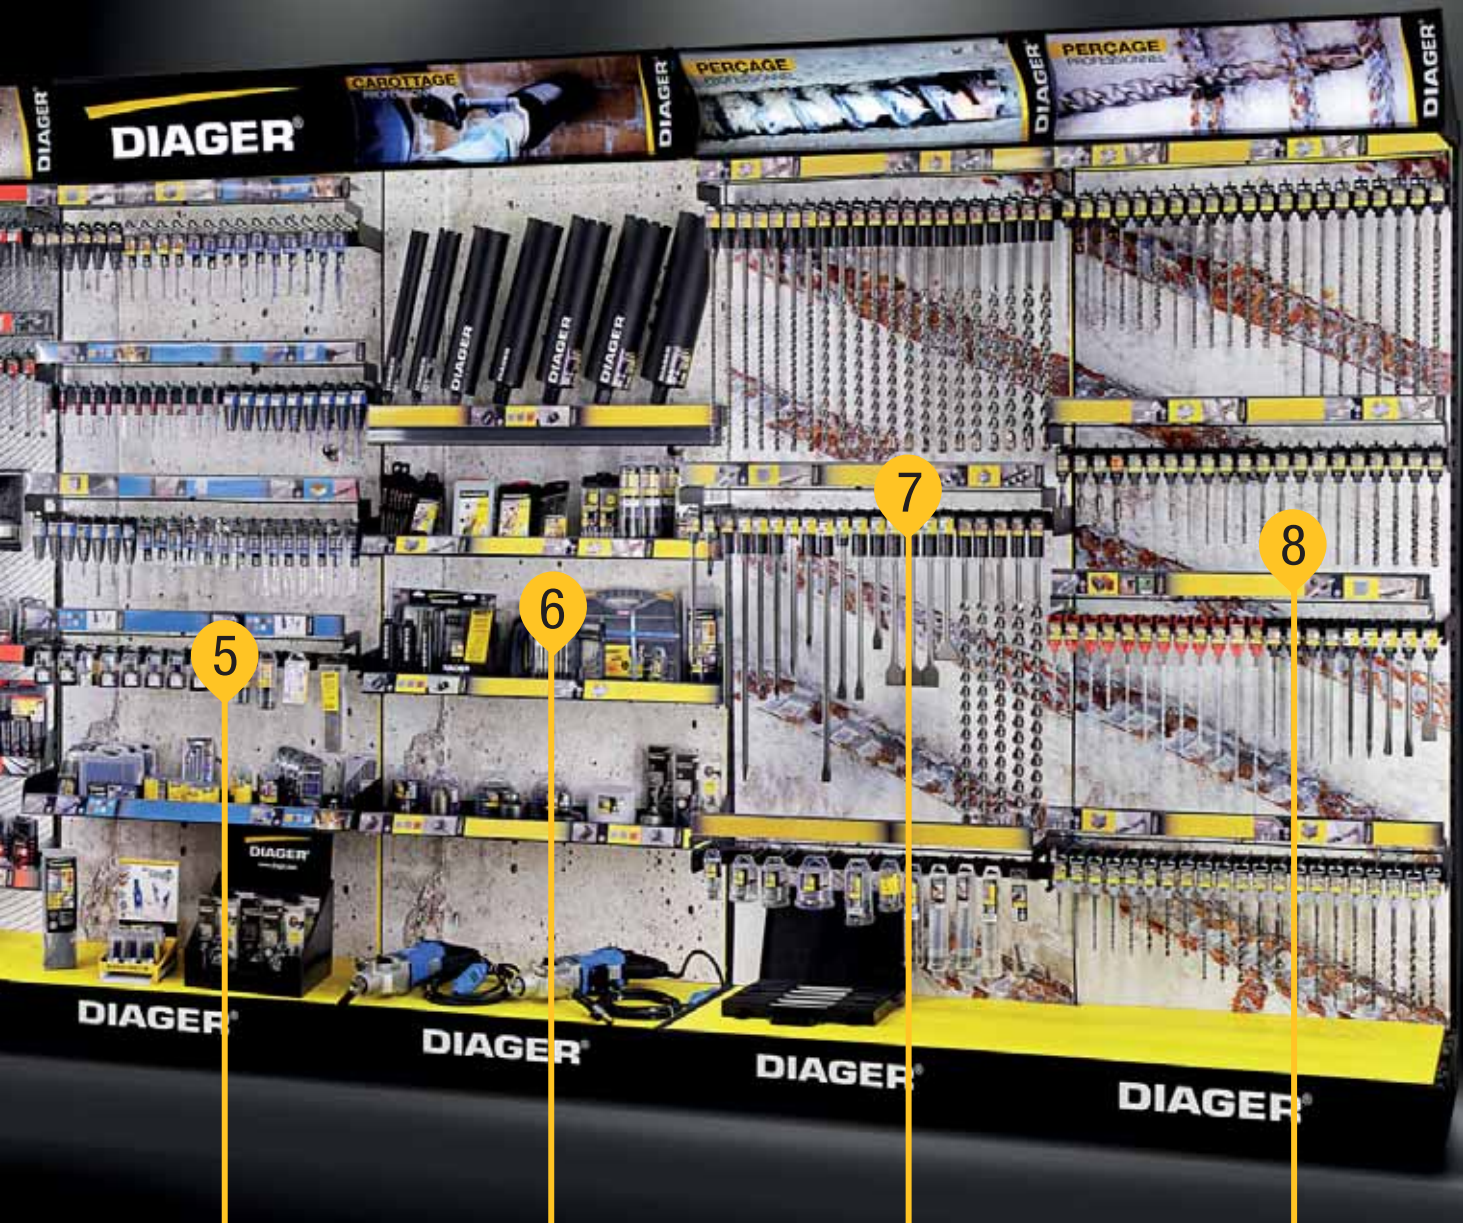

## DRILLING

### SPECIFIC

Specific material drilling, ceramic, glass, gre-ceram, composite, HPL, cement fibre, tile.

## CORING

Diamond core bit, drill motor and drilling stand. Diamond core bit and carbide core bit.

## DRILLING

### SDS-MAX

SDS-max drill bit for concrete, reinforced concrete and hard rock. Drill bit up to 4 meters long. Pointed and flat chisels.

## DRILLING

### SDS-PLUS

SDS-plus drill bit for concrete and reinforced concrete, granit, brick, breeze block. Pointed and flat chisels.



# DRILLING

## Concrete

### CONCRETE - HAMMER DRILL BIT

|   |                               |              |
|---|-------------------------------|--------------|
| <b>Booster Plus</b>                     | Ref. 113-157K-157L-157M       | <b>16-22</b> |
| <b>Stop drill bit</b>                   | Ref. 108                      | <b>23</b>    |
| <b>Windows and frames drill bit 4G4</b> | Ref. 102-103                  | <b>24-25</b> |
| <b>Twister Plus</b>                     | Ref. 112                      | <b>26</b>    |
| <b>Wallster</b>                         | Ref. 110-108L-108R            | <b>28-31</b> |
| <b>Granit</b>                           | Ref. 104                      | <b>32</b>    |
| <b>Ultimax 646</b>                      | Ref. 184                      | <b>34</b>    |
| <b>Speeduster - Accessories</b>         | Ref. 166                      | <b>36-39</b> |
| <b>Power Max</b>                        | Ref. 114-114Dplus-161-161Dmax | <b>40-45</b> |
| <b>Crosser</b>                          | Ref. 370B>376B-090C>093C      | <b>46-51</b> |
|   | Ref. 165                      | <b>52</b>    |

### ACCESSORIES

|                                  |                     |           |
|----------------------------------|---------------------|-----------|
| <b>Adapter and Chuck adapter</b> | Ref. 138B-143B-177B | <b>53</b> |
| <b>Chuck</b>                     | Ref. 121K-124K      | <b>54</b> |

### TOOL FOR HAMER DRILLS

|                                |              |           |
|--------------------------------|--------------|-----------|
| <b>Helical pointed chisel</b>  | Ref. 322-342 | <b>58</b> |
| <b>Flat chisel</b>             | Ref. 318-343 | <b>58</b> |
| <b>Bush hammer head</b>        | Ref. 363     | <b>59</b> |
| <b>Angled bolster</b>          | Ref. 348-349 | <b>59</b> |
| <b>Toothed chisel</b>          | Ref. 361     | <b>59</b> |
| <b>Jointed chisel</b>          | Ref. 329     | <b>60</b> |
| <b>Concrete chasing chisel</b> | Ref. 311-312 | <b>60</b> |
| <b>Brick chasing chisel</b>    | Ref. 314     | <b>60</b> |

### TOOL FOR ELECTRIC CONCRETE BREAKER

|                       |                              |              |
|-----------------------|------------------------------|--------------|
| <b>Pointed chisel</b> | Ref. 310-324-359-354-321-393 | <b>62-68</b> |
| <b>Flat chisel</b>    | Ref. 347-320-355-341-351-394 | <b>66-69</b> |
| <b>Spade chisel</b>   | Ref. 373                     | <b>68</b>    |

### DIAMOND

|                         |                          |              |
|-------------------------|--------------------------|--------------|
| <b>Diamond core bit</b> | Ref. 436A-436B-439B      | <b>70-75</b> |
| <b>Drill motor</b>      | Ref. 350H-351H-356H-398H | <b>76-77</b> |
| <b>Drilling stand</b>   | Ref. 353H-354H-355H      | <b>78-79</b> |
| <b>Accessories</b>      |                          | <b>80-88</b> |
| <b>Blue Ceram</b>       | Ref. 426-416-417         | <b>90-91</b> |
| <b>Diamond hole saw</b> | Ref. 440C-440A-440B-458A | <b>92-95</b> |
| <b>Diamond core bit</b> | Ref. 431-432             | <b>96-97</b> |

### CARBIDE CORE BIT

|   |                           |                |
|---|---------------------------|----------------|
| <b>Carbide hole saw - Accessories</b>               | Ref. 357L-357M-357A/B/C/E | <b>98-102</b>  |
| <b>Carbide hole saw - case and kit</b>              | Ref. 3000C/E-3000A/B      | <b>103</b>     |
| <b>SDS-plus compatible kit and drill compatible</b> | Ref. 326C-328             | <b>106</b>     |
| <b>Pro compatible SDS-plus</b>                      | Ref. 366-370-367          | <b>107</b>     |
| <b>Compatible SDS max</b>                           | Ref. 300-300C-302-330-303 | <b>108-109</b> |

### CONCRETE - STRAIGHT SHANK

|                 |          |            |
|-----------------|----------|------------|
| <b>Optima3+</b> | Ref. 263 | <b>110</b> |
| <b>Mega</b>     | Ref. 226 | <b>111</b> |
| <b>Pro</b>      | Ref. 264 | <b>112</b> |
| <b>Flash</b>    | Ref. 265 | <b>113</b> |

## Specific

|  |                          |              |
|--|--------------------------|--------------|
| <b>Blue Ceram</b>                        | Ref. 426-416-417         | <b>90-91</b> |
| <b>Diamond hole saw - Accessories</b>    | Ref. 440C-440A-440B-458A | <b>92-95</b> |
| <b>Multimaterials</b>                    | Ref. 215                 | <b>114</b>   |
| <b>Ceramik drill bit</b>                 | Ref. 245                 | <b>115</b>   |
| <b>Hard stone &amp; granit drill bit</b> | Ref. 208                 | <b>115</b>   |
| <b>Scribing iron</b>                     | Ref. 403                 | <b>116</b>   |
| <b>Carbide claw</b>                      | Ref. 407                 | <b>116</b>   |
| <b>Ceratile</b>                          | Ref. 400                 | <b>117</b>   |
| <b>HPL bit</b>                           | Ref. 201                 | <b>118</b>   |

## Special driller

|                             |              |            |
|-----------------------------|--------------|------------|
| <b>Hexa, wood drill bit</b> | Ref. 781-981 | <b>119</b> |
|-----------------------------|--------------|------------|

## HSS-Metal

|                                       |                              |                |
|---------------------------------------|------------------------------|----------------|
| <b>5% Cobalt drill bit</b>            | Ref. 731-700                 | <b>126-127</b> |
| <b>HSS-G3 drill bit</b>               | Ref. 702-703                 | <b>128-129</b> |
| <b>Pro drill bit</b>                  | Ref. 729-726-735-713-712-715 | <b>130-133</b> |
| <b>Roll forged drill bit</b>          | Ref. 750                     | <b>134</b>     |
| <b>5% cobalt TIALN Step drill bit</b> | Ref. 500B-501B-502B          | <b>136-137</b> |
| <b>Step drill bit</b>                 | Ref. 511B-512B-513B          | <b>138-139</b> |
| <b>Tap</b>                            | Ref. 867                     | <b>140</b>     |
| <b>Screw extractor</b>                | Ref. 634                     | <b>141</b>     |
| <b>Centersink</b>                     | Ref. 504                     | <b>141</b>     |
| <b>TCT HSS drill bit</b>              | Ref. D2409-D2418             | <b>142-143</b> |


## Wood

|                                    |                  |                |
|------------------------------------|------------------|----------------|
| <b>Auger bit SUPER PRO</b>         | Ref. 912-942     | <b>150-151</b> |
| <b>Flat bit &amp; Accessories</b>  | Ref. 904-906-908 | <b>152-153</b> |
| <b>Forstner Woodmax bit</b>        | Ref. 934         | <b>154</b>     |
| <b>Formwork drill bit</b>          | Ref. 723M-722M   | <b>155</b>     |
| <b>Depth adjuster collars</b>      | Ref. 938C        | <b>156</b>     |
| <b>Wood countersink</b>            | Ref. 939         | <b>156</b>     |
| <b>4 points drill bit - 4 wood</b> | Ref. 910         | <b>157</b>     |
| <b>3 points drill bit</b>          | Ref. 915         | <b>158</b>     |
| <b>Decking kit</b>                 | Ref. 902-911     | <b>160-161</b> |

## INFORMATION

|  |                |
|--|----------------|
| <b>Company presentation</b>                                      | <b>6-11</b>    |
| <b>Symbols, packaging legends, common</b>                        | <b>12-13</b>   |
| <b>Drilling concrete guide</b>                                   | <b>14-15</b>   |
| <b>Hammer drills &amp; attachments compatibility</b>             | <b>61</b>      |
| <b>Electric concrete breaker &amp; attachments compatibility</b> | <b>64-65</b>   |
| <b>Drilling core guide</b>                                       | <b>71</b>      |
| <b>Drilling metal guide</b>                                      | <b>124-125</b> |
| <b>Drilling wood guide</b>                                       | <b>148-149</b> |
| <b>Speed of drilling rotation</b>                                | <b>164-165</b> |
| <b>Screw bits manual</b>   | <b>166-169</b> |
| <b>Holesaws manual</b>   | <b>194-195</b> |
| <b>Jigsaw and reciprocating blade manual</b>                     | <b>202-209</b> |
| <b>Textile</b>   | <b>224-225</b> |
| <b>Services</b>  | <b>234-235</b> |



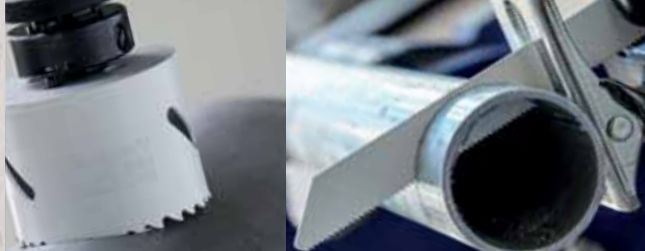

# SAWING

## HOLESAW

|                         |              |                |
|-------------------------|--------------|----------------|
| <b>Bi-Metal holesaw</b> | Ref. 650     | <b>194-196</b> |
| <b>Accessories</b>      | Ref. 651-652 | <b>197-199</b> |

## JIGSAW BLADE

|                 |                    |                |
|-----------------|--------------------|----------------|
| <b>Wood</b>     | Ref. L000W > L101W | <b>210-214</b> |
| <b>Specific</b> | Ref. L012S         | <b>215</b>     |
| <b>Metal</b>    | Ref. L000M > L102M | <b>215-217</b> |

## RECIPROCATING SAW BLADE

|                    |                            |                |
|--------------------|----------------------------|----------------|
| <b>Wood</b>        | Ref. L200W > L202W - L204S | <b>218</b>     |
| <b>Specific</b>    | Ref. L200S > L206S         | <b>219-221</b> |
| <b>Metal</b>       | Ref. L200M > L206M         | <b>221-223</b> |
| <b>Accessories</b> | Ref. 680                   | <b>217</b>     |



# SETS

|                     |                |
|---------------------|----------------|
| <b>Concrete</b>     | <b>120-121</b> |
| <b>Specific</b>     | <b>122-123</b> |
| <b>Metal</b>        | <b>146-147</b> |
| <b>Wood</b>         | <b>162-163</b> |
| <b>Screwdriving</b> | <b>188-191</b> |
| <b>Holesaw</b>      | <b>200-201</b> |



# MERCHANDISING

|  |                |
|--|----------------|
| <b>Display 9 meters, range pro XXL</b> | <b>2-3</b>     |
| <b>SDS-plus concept</b>                | <b>35</b>      |
| <b>Demolition concept</b>              | <b>57</b>      |
| <b>Diamond concept</b>                 | <b>89</b>      |
| <b>Concrete concept</b>                | <b>104-105</b> |
| <b>HSS concept</b>                     | <b>144-145</b> |
| <b>Screw bits</b>                      | <b>192-193</b> |
| <b>Information about sales place</b>   | <b>225</b>     |
| <b>Drill center</b>                    | <b>226-227</b> |
| <b>Concept store</b>                   | <b>228-229</b> |
| <b>Bottom of shelf low sales shelf</b> | <b>230</b>     |
| <b>Sales animation</b>                 | <b>231</b>     |
| <b>List of furnitures</b>              | <b>232-233</b> |



# SCREW BITS

## IMPACT BLUE SHOCK SCREW BITS

|                   |              |                |
|-------------------|--------------|----------------|
| <b>Phillips</b>   | Ref. U610PH  | <b>170-171</b> |
| <b>Pozidriv</b>   | Ref. U612PZ  | <b>170-171</b> |
| <b>Torx</b>       | Ref. U613T   | <b>170-171</b> |
| <b>Hexa</b>       | Ref. U615HEX | <b>172</b>     |
| <b>Square</b>     | Ref. U617SQ  | <b>172</b>     |
| <b>Bit holder</b> | Ref. U621B   | <b>172</b>     |

## PRO SCREW BITS

### TORSION SCREW BITS

|                 |             |            |
|-----------------|-------------|------------|
| <b>Phillips</b> | Ref. U640PH | <b>174</b> |
| <b>Pozidriv</b> | Ref. U642PZ | <b>174</b> |
| <b>Torx</b>     | Ref. U643T  | <b>175</b> |
| <b>Slotted</b>  | Ref. U641PL | <b>175</b> |

### REDUCED SECTION QUALITY SCREW BITS

|                    |              |            |
|--------------------|--------------|------------|
| <b>Phillips</b>    | Ref. U620PH  | <b>176</b> |
| <b>Pozidriv</b>    | Ref. U622PZ  | <b>176</b> |
| <b>Torx</b>        | Ref. U623T   | <b>177</b> |
| <b>Torx Tamper</b> | Ref. U624TT  | <b>177</b> |
| <b>Hexa</b>        | Ref. U625HEX | <b>177</b> |

### QUALITY SCREW BITS

|                    |               |            |
|--------------------|---------------|------------|
| <b>Torx Tamper</b> | Ref. U624TT   | <b>178</b> |
| <b>Hexa</b>        | Ref. U625HEX  | <b>178</b> |
| <b>Square</b>      | Ref. U627SQ   | <b>178</b> |
| <b>Spanner</b>     | Ref. U628SP   | <b>178</b> |
| <b>Torx® TTAP®</b> | Ref. U626TTAP | <b>179</b> |

## STAINLESS STEEL SCREW BITS

|                 |             |            |
|-----------------|-------------|------------|
| <b>Phillips</b> | Ref. U650PH | <b>174</b> |
| <b>Pozidriv</b> | Ref. U650PZ | <b>174</b> |
| <b>Torx</b>     | Ref. U650T  | <b>174</b> |
| <b>Slotted</b>  | Ref. U650PL | <b>174</b> |

## ACCESSORIES

|  |  |                |
|--|--|----------------|
| <b>Bit-holders</b>                     | Ref. U634-U639-U648-U638-U626-U628-U629-U635 | <b>180-183</b> |
| <b>Stopvis</b>                         | Ref. 627                                     | <b>183</b>     |
| <b>90° angle driver</b>                | Ref. 637                                     | <b>184</b>     |
| <b>Handle 1/4" with flexible shaft</b> | Ref. 644                                     | <b>184</b>     |
| <b>Quick lock handle 1/4"</b>          | Ref. 645                                     | <b>186</b>     |
| <b>Telescopic handle 1/4"</b>          | Ref. 646                                     | <b>186</b>     |
| <b>Surface protection socket</b>       | Ref. U601S                                   | <b>187</b>     |
| <b>Pro magnetic socket</b>             | Ref. U600-U603                               | <b>187</b>     |



# Diager, solar manufacturer.

A photovoltaic power plant on the roof of our new factory! ("Made in Jura", in alliance with our local partners, obviously!) Our choice has also been driven by the sourcing of "Made in France" equipment, concerned about preserving short-circuits and technological proximity.

On an area of approx. 11,000 sq ft and with a potential of 190 Megawatts per year, this installation will allow us to provide more than 5% of our electricity needs, 100% CO2 free as it's green energy !

We are proud to propel the company into a less polluted future, by multiplying the projects and actions that improve our daily routine, such as sustaining our work tool.

In the light of this, numerous other actions are underway: LED lighting, heat recovery compressor, investments in more energy-efficient equipment, less polluting electrical vehicles, building rehabilitation, wood heating, and so on.

**Nevertheless, the "Greener Good" energy is the one we don't consume !**

To develop, to renew, to innovate constantly without negating its values and convictions? This is the permanent challenge that our company does not fear to take up, with you and for you.

How? In 2019, Diager expands Poligny's production site in Jura. Thanks to nearly 10 million dollars investment, an additional 17,000 sq ft plant will allow the company to implement its production tool with 10 new machines.

The goal? To answer the growing demand, to shortcut our delivery time but also to prove that the "Made in France" production has its rightful place on the global industrial market.

These major works are led by our willingness to form part of a long-lasting legacy, because our values drive our choices, and we decide to provide local solutions.

On the strength of its consequent and brand new facilities, the brand Diager stays, more than ever, faithful to its values. We've never been striving that much for building a sustainable future together, in search of performance for our customers, while respecting the environment and the human being in harmony with our surroundings.











## All responsible



At the dawn of this year 1953, the first steps were taken of what would become Diager 68 years later; a committed company, with more than 200 employees, all driven by the same will, sharing the same values. We are located in the Jura, cradle of the Defougères family which still owns 100% of the companies' capital. Several generations have succeeded one another and all have brought visions and transformations that shape our history.

Our DNA: we are manufacturers, our factories are in France, we love quality products. Our technological development accompanies our creativity and our need to innovate, we invest relentlessly to optimize product performance, guarantee their longevity and improve their conditions of use. Our territorial anchoring is not limited to our industrial perimeter, we have since the beginning developed our activities towards the international one,

we are established in Mexico and in Germany, where we produce "Made in" bit holders and screwdriver bits. Germany". We are all responsible; responsible for our environmental impact, responsible for our sustainable development, responsible for an ethical and respectful commitment for our employees, customers and suppliers. We have been engaged in a CSR process for several years, already pre-labeled in 2019 (E-26000), we are taking this next step in 2020 with a 26000 certified Afnor labeling. Beyond the dedication of the efforts made daily by our employees, it is the heart of the company and its strategy that beats CSR.

François Defougères,  
Président.

## UN Sustainable Development Goals

### 17 goals to transform the world

The Sustainable Development Goals are a call to action from all countries – poor, rich and middle-income – to promote prosperity while protecting the planet





# Territorial anchoring



- Founding member “Made in Jura”.
- 92% of packaging carried out in work assistance establishments and services.
- Participation in the support of 112 local businesses.
- Numerous grants for cultural projects.
- Support for sports clubs.
- Support for employees in their associative leisure.



## 5 Sustainable Development Goals



# Well being at work

- Use of exoskeleton.
- Creation of a social service.
- Prevention of musculoskeletal disorders.
- Mobilization of Research, Health and Solidarity actions.




## 4 Sustainable Development Goals





## Sustainable development

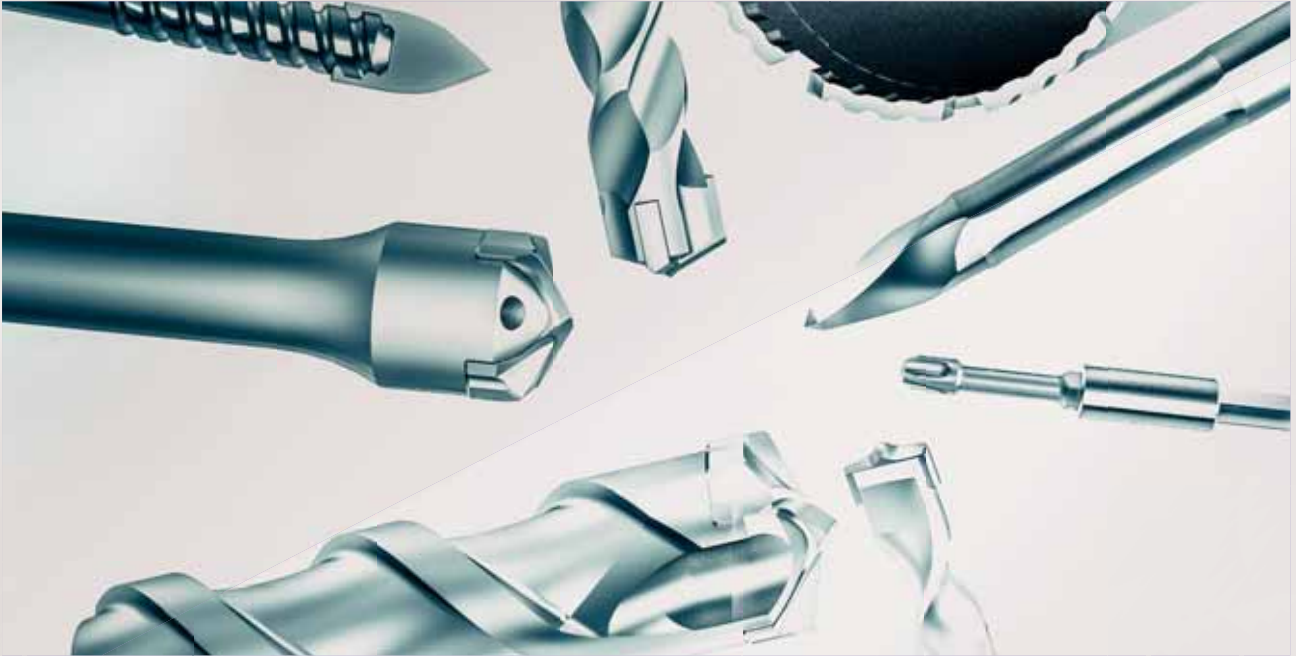

- Creation of a new factory, 2000 m<sup>2</sup>.
- € 10 million investment in production lines.
- 13 inventions.
- 54 patents filed.
- 112 registrations of trademarks, designs and models.
- 16 job creations in 2 years.
- € 1/2 million investment in digital.
- Development of a security policy.
- Each year, 1/3 of the employees in training.



# Environment

- 1000 m<sup>2</sup> of solar panels.
  - Sorting, separation and recovery of waste.
- € 270,000 investment for the recovery and filtration of fumes.
  - 40% reduction in our water consumption in 10 years.
- Reduction of CO<sub>2</sub> emissions.
  - 75% of the self-drive electric car fleet.
  - Recovery of fatal heat for heating workshops.
- 50% of administrative offices heated with wood.



## 8 Sustainable Development Goals





# Symbols

## Materials

### Masonry




### Wood




### Metals




### Specifics

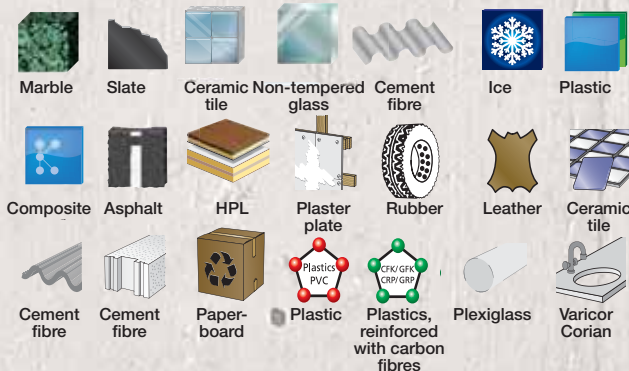


### Insulation



## Diamond Tools

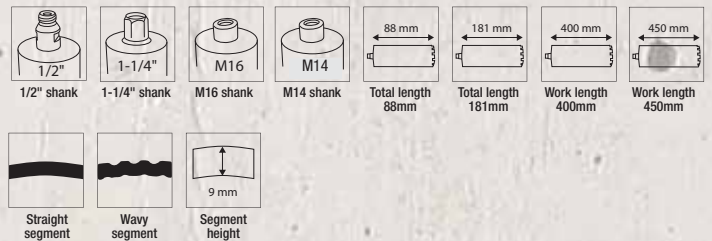

## Metal drill bits

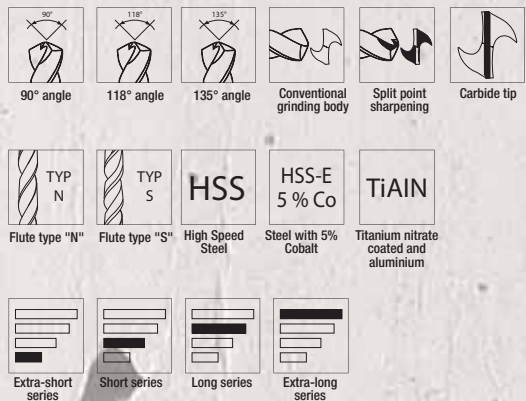

## Taps




## Motors



## Use



## Shanks




## Security





# Packaging Legends

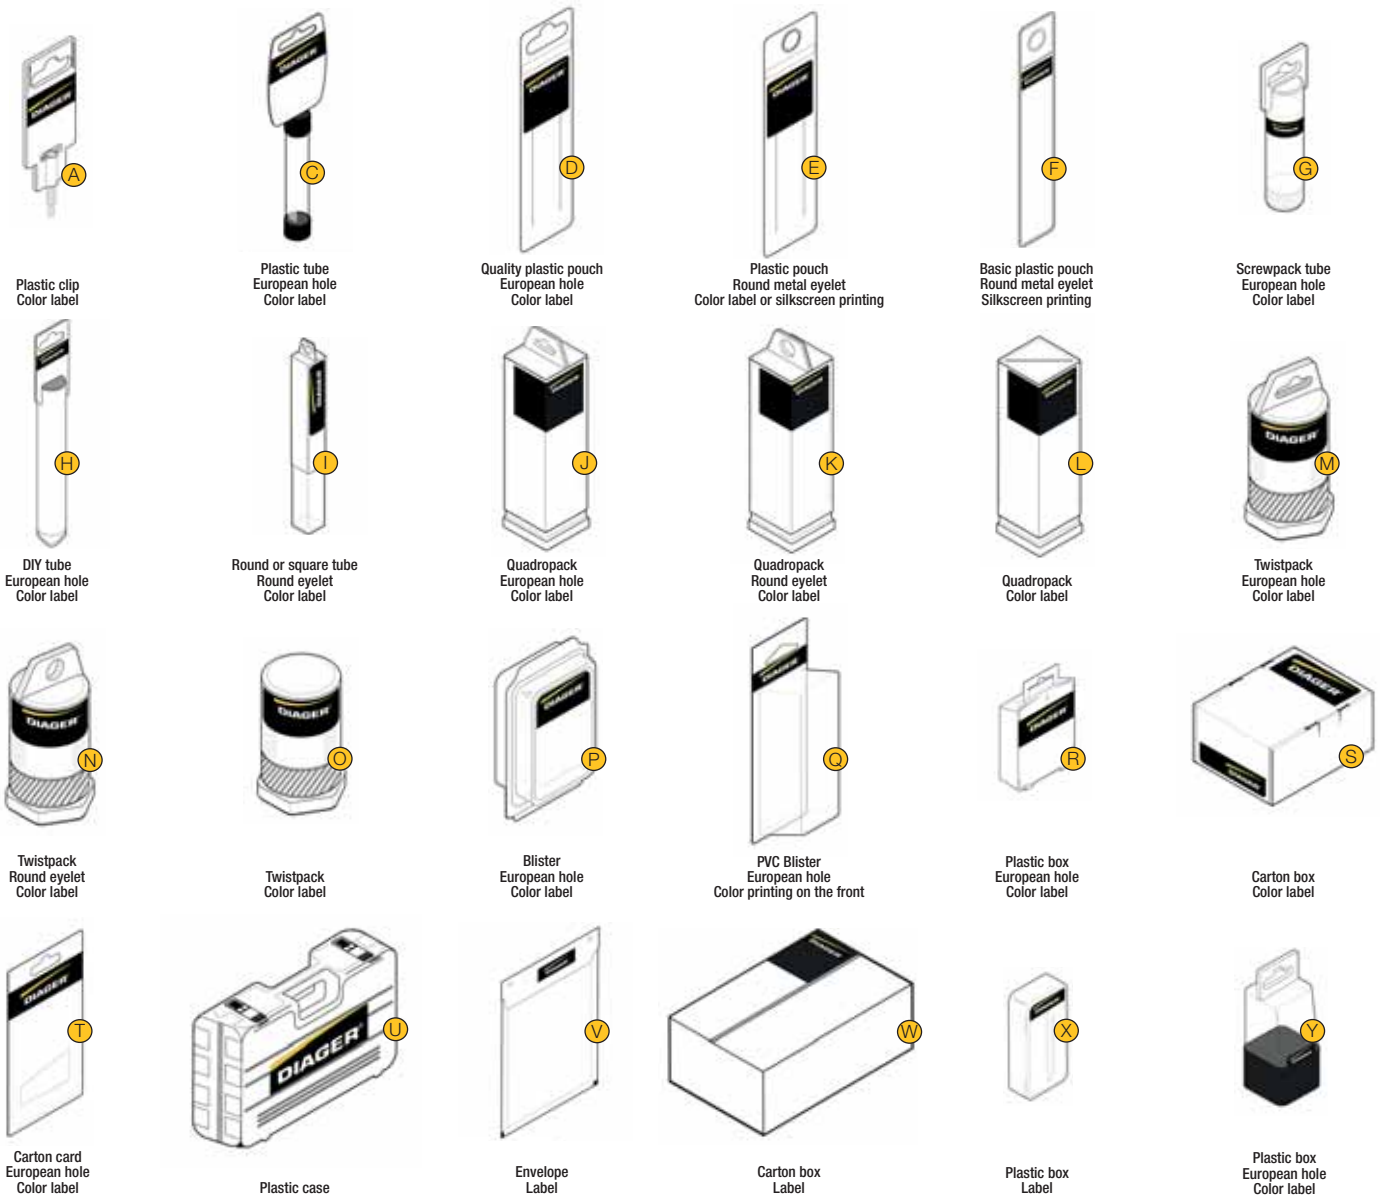

To ensure the fastening of the fasteners in time, it is advisable to put the european hole type fasteners on a double spindle, especially for heavy products.

## Prüfgemeinschaft

The PGM is an independent association which certifies hammer and straight shank drill bits since 1978. He stays up the standards, and, checks products and policies of quality monitoring of the manufacturers. Drill bits have to meet the requirements of a strict specifications with the aim of allowing safe anchorings. These controls carry among others, on the diameter, the centring of the carbide tip, the straightness of drill bits. Certified drill bits are stamped with the PGM logo with the manufacturer number.








## Common

|                   |                            |
|-------------------|----------------------------|
| <b>Ø</b>          | Tool's diameter            |
| <b>Øint.</b>      | Inside diameter            |
| <b>Øext.</b>      | Outside diameter           |
| <b>Øatt.</b>      | Shank diameter             |
| <b>ØxP.</b>       | Diameter x Depth           |
| <b>ØxPas</b>      | Diameter x Metrical Thread |
| <b>Lu</b>         | Working length             |
| <b>Lt</b>         | Total length               |
| <b>L200 x 340</b> | WL x TL                    |
| <b>Larg.</b>      | Tool's width               |
| <b>Ep.</b>        | Thickness                  |
| <b>L</b>          | Length                     |
| <b>h</b>          | Tool height                |
| <b>N.S</b>        | Segments quantity          |
| <b>ml</b>         | Volume (in ml)             |
| <b>Coul</b>       | Colors                     |
| <b>Qt.</b>        | Quantity                   |
| <b>UC</b>         | Multiple of order          |
| <b>Pack</b>       | Packaging                  |
| <b>Pcs</b>        | Quantity per set           |
| <b>mm/tpi</b>     | Quantity of teeth          |



# Drilling concrete and specifics guide

| Ref.                            | Features                        | Attachment compatible | Origin & Standards  | Benefits   | Page  | Reinforced concrete | Concrete | Granit  | Stone, Rock | Brick | Cellular concrete | Breeze block | Hollow brick |
|---------------------------------|---------------------------------|-----------------------|---|--|-------|---------------------|----------|---------|-------------|-------|-------------------|--------------|--------------|
| 113                             | Booster                         | SDS-plus              |    | <ul style="list-style-type: none"> <li>• Drill rebar</li> <li>• Perfectly round and calibrated hole</li> <li>• Drills without cracking the concrete</li> </ul>                   | 18-22 | Optimal             | Optimal  |         | Optimal     |       |                   |              |              |
| 108                             | Stop drill bit                  | SDS-plus              |    | <ul style="list-style-type: none"> <li>• Perfect for fast volume drilling</li> <li>• Depth control</li> <li>• Drill rebar</li> </ul>   | 23    | Optimal             | Optimal  |         | Optimal     |       |                   |              |              |
| 102                             | Windows & Frame drill bit       | SDS-plus              |    | <ul style="list-style-type: none"> <li>• Doors and windows frame applications</li> <li>• Perfectly round and calibrated hole</li> <li>• Elasticity resistance</li> </ul>         | 24-25 | Optimal             | Optimal  |         | Optimal     |       |                   |              |              |
| 112                             | 4G4                             | SDS-plus              |    | <ul style="list-style-type: none"> <li>• Sped</li> <li>• Longer life time</li> </ul>   | 26-27 |                     | Optimal  |         | Optimal     |       |                   |              |              |
| 110                             | Twister                         | SDS-plus              |    | <ul style="list-style-type: none"> <li>• Sped</li> <li>• Longer life time</li> </ul>   | 28-31 |                     | Optimal  |         | Optimal     |       |                   |              |              |
| 104                             | Wallster                        | SDS-plus              |  | <ul style="list-style-type: none"> <li>• Perfect design for hollow bricks</li> <li>• Perfect anchoring of plugs</li> </ul>   | 32-33 |                     |          |         |             |       |                   | Optimal      | Optimal      |
| 184                             | Granit                          | SDS-plus              |  | <ul style="list-style-type: none"> <li>• Drilling into granit from class 1 to 3</li> </ul>   | 34    |                     | Optimal  | Optimal | Optimal     |       |                   |              |              |
| 166                             | Ultimax 646                     | SDS-max               |  | <ul style="list-style-type: none"> <li>• Rebar drilling</li> <li>• Longer life time</li> <li>• Avoid risk of blocking</li> <li>• Perfectly round and calibrated hole</li> </ul>  | 38-39 | Optimal             | Optimal  |         | Optimal     |       |                   |              |              |
| 114<br>161                      | Speeduster 3T<br>Speeduster 646 | SDS-plus<br>SDS-max   |  | <ul style="list-style-type: none"> <li>• Rebar drilling</li> <li>• Work without dust</li> <li>• Retroactive rebar connection</li> </ul>  | 42-45 | Optimal             | Optimal  |         | Optimal     |       |                   |              |              |
| 373B                            | Power-Max                       | SDS-max               |  | <ul style="list-style-type: none"> <li>• Big diameter</li> <li>• Deep drilling</li> <li>• Modular system</li> </ul>  | 48-51 |                     | Optimal  |         | Optimal     |       |                   |              |              |
| 165                             | Crosser                         | SDS-max               |  | <ul style="list-style-type: none"> <li>• Shipyards of renovation, install electrical enclosures...</li> <li>• Deep drilling in crossing</li> <li>• Important diameter</li> </ul> | 52    |                     | Optimal  |         | Optimal     |       |                   |              |              |
| 322<br>342                      | Helical pointed chisel          | SDS-plus<br>SDS-max   |  | <ul style="list-style-type: none"> <li>• Effortless drilling</li> <li>• Anti-lock</li> </ul>   | 58    |                     | Optimal  |         | Optimal     |       |                   |              |              |
| 310<br>324<br>359<br>354<br>393 | Pointed chisel                  | For electric breaker  |  | <ul style="list-style-type: none"> <li>• For electric breaker</li> <li>• Intensive work</li> <li>• Robust and power of optimal typing</li> </ul>                                 | 66-68 |                     | Optimal  |         | Optimal     |       |                   |              |              |
| 318<br>343                      | Flat chisel                     | SDS-plus<br>SDS-max   |  | <ul style="list-style-type: none"> <li>• Intensive work</li> <li>• Robust and power of optimal typing</li> </ul>   | 58    |                     | Optimal  |         | Optimal     |       |                   |              |              |
| 320<br>355<br>347<br>341<br>394 | Flat chisel                     | For electric breaker  |  | <ul style="list-style-type: none"> <li>• Intensive work</li> <li>• Robust and power of optimal typing</li> </ul>   | 66-69 |                     | Optimal  |         | Optimal     |       |                   |              |              |

 Optimal  Occasional

WARNING : The user of our products is the only responsible for the structural consequences of drilling concrete rebars. It is necessary to consult specialized engineers if a structural part is concerned.



| Ref.       | Features            | Attach-ment    | Origin & Standards | Benefits  | Page      | Concrete | Granit | Stone, Rock | Brick | Cellular concrete | Breeze block | Hollow brick | Plaster | Low density wood | Steel | Marble | Slate | Ceramik | Tiles up to 5th class | No-tempered glass | Cement fibre, Composite, HPL | Ice | Plastic |
|------------|---------------------|----------------|--------------------|---|-----------|----------|--------|-------------|-------|-------------------|--------------|--------------|---------|------------------|-------|--------|-------|---------|-----------------------|-------------------|------------------------------|-----|---------|
|            |                     |                |                    |   |           |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 426        | Blue ceram          | Hexa           |                    | <ul style="list-style-type: none"> <li>• Drilling of sandstone class 4 and 5</li> <li>• Holes clean, precise and without the glare</li> </ul>   | 90        |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 440C       | Diamon hole saw     | M14 Hexa       |                    | <ul style="list-style-type: none"> <li>• Fast drilling</li> <li>• Long life</li> <li>• Dry drilling</li> </ul>  | 94 - 95   |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 431<br>432 | Diamond core bit    | M16            |                    | <ul style="list-style-type: none"> <li>• Electrical installations (installation of box, box...)</li> <li>• Net hole</li> <li>• Versatility</li> <li>• Robustness</li> </ul>                                 | 96 - 97   |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 357L       | Carbide hole saw    | Hexa SDS-plus  |                    | <ul style="list-style-type: none"> <li>• Large clearance of chip</li> <li>• Fast drilling</li> <li>• Integrated adapter to change of hole saw in one easy step</li> <li>• Quick ejection of core</li> </ul> | 100 - 103 |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 326<br>328 | Carbide core bit    | SDS-plus       |                    | <ul style="list-style-type: none"> <li>• Passage of electrical equipment with diameters important</li> <li>• Performance and robustness</li> </ul>  | 106       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 366        | Carbide core bit    | SDS-plus       |                    | <ul style="list-style-type: none"> <li>• Electrical installations requiring drilling diameters very important</li> <li>• Performance and robustness</li> </ul>  | 107       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 300        | Carbide core bit    | SDS-max        |                    | <ul style="list-style-type: none"> <li>• Sanitary works and renovation</li> <li>• Performance and robustness</li> </ul>   | 108       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 263        | Optima 3+           | Straight shank |                    | <ul style="list-style-type: none"> <li>• Self centering tip</li> <li>• Round and calibrated hole for perfect anchoring</li> </ul>   | 110       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 226        | Mega                | Straight shank |                    | <ul style="list-style-type: none"> <li>• Intensive use</li> <li>• Longevity and performance</li> </ul>  | 111       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 264        | Pro                 | Straight shank |                    | <ul style="list-style-type: none"> <li>• Speed</li> </ul>   | 112       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 265        | Flash               | Straight shank |                    | <ul style="list-style-type: none"> <li>• For cordless drills</li> <li>• More than 20% battery life time</li> </ul>  | 113       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 215        | Multi-materials     | Straight shank |                    | <ul style="list-style-type: none"> <li>• Versatile</li> </ul>   | 114       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 245        | Ceramik             | Straight shank |                    | <ul style="list-style-type: none"> <li>• Drilling of ceramics</li> <li>• Speed and cleanliness of drilling</li> </ul>   | 115       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 208        | Hard stone & granit | Straight shank |                    | <ul style="list-style-type: none"> <li>• The work of marbrier (installation of kitchen, bathroom...)</li> <li>• Durability and resistance</li> </ul>  | 115       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 400        | Ceratile            | Straight shank |                    | <ul style="list-style-type: none"> <li>• Speed of drilling and great versatility</li> </ul>   | 117       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |
| 201        | HPL drill bit       | Straight shank |                    | <ul style="list-style-type: none"> <li>• Install insulating facade, kitchen, false ceiling...</li> <li>• Speed, cleanliness &amp; longevity</li> </ul>  | 118       |          |        |             |       |                   |              |              |         |                  |       |        |       |         |                       |                   |                              |     |         |

Optimal Occasional



# 3 cutters technology



## all products 3 cutters technology



Special REINFORCED CONCRETE **booster<sub>plus</sub>** compatible SDS-plus - ref.113



WINDOWS & FRAME drill bit - compatible SDS-plus - ref.102



Bit with stop - compatible SDS-plus - ref.108



Special REINFORCED CONCRETE **booster<sub>top</sub>** compatible SDS-top - ref.131






**RESISTANCE TO OVERHEATING**




The solid monobloc carbide tip, is inserted and brassed with copper, resistant to over 1000°C temperature raise

**HAMMERING EFFECT**




3X 135° edges, combine the most efficient drilling without cracking the concrete around

**PRECISION**



The self centering tip design, drives the bit straight

**TRAJECTORY CONTROL**




**PERFECT HOLE, PERFECT ANCHORING**




Answers to all world technical standards agreements

**BETTER DUST REMOVAL CAPACITIES**

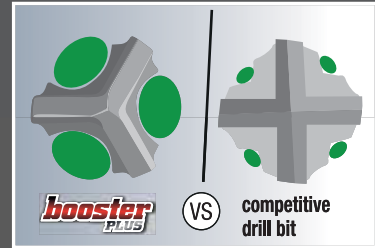


Its design offers the largest dust removal on its market

**SPECIAL REINFORCED CONCRETE**

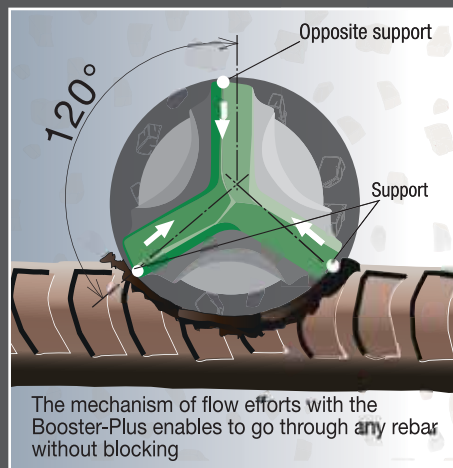

The mechanism of flow efforts with the Booster-Plus enables to go through any rebar without blocking

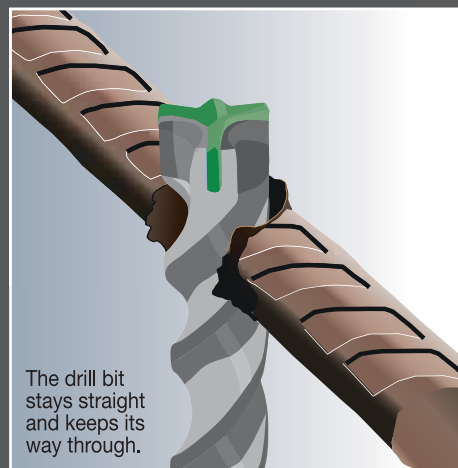

The drill bit stays straight and keeps its way through.

Ref. 113

# Booster Plus *booster* PLUS

Hammer drill bit 3 cutting edges compatible SDS+

High performance drill bit for drilling concrete and reinforced concrete.



Reinforced concrete, Concrete, Stone, Brick

**+**

## • DRILL REINFORCED CONCRETE

**Features**

- Monobloc carbide tip 3 cutting edges.
- Angle tip 150°.
- Self centering tip.

**Benefits**

- Drilling in all types of concrete.
- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

Shank Hammer drill



Compatible SDS-plus



see our video on YouTube

ALL SETS PAGES 120-121

x7



113D

x5



104B

x5



115C

x10



072B



| Ø                  | WL  | TL  | Ref.          | Gencod        | Qty | Ø                  | WL  | TL  | Ref.          | Gencod        | Qty |
|--------------------|-----|-----|---------------|---------------|-----|--------------------|-----|-----|---------------|---------------|-----|
| <b>L 50 x 110</b>  |     |     |               |               |     | <b>L 200 x 260</b> |     |     |               |               |     |
| 5                  | 50  | 110 | 113D05L0110   | 3336600110694 | 1   | 6                  | 200 | 260 | 113D06L0260   | 3336600154025 | 1   |
| 5.5                | 50  | 110 | 113D05.5L0110 | 3336600185791 | 1   | 6.5                | 200 | 260 | 113D06.5L0260 | 3336600154032 | 1   |
| 6                  | 50  | 110 | 113D06L0110   | 3336600029385 | 1   | 8                  | 200 | 260 | 113D08L0260   | 3336600154049 | 1   |
| 6.5                | 50  | 110 | 113D06.5L0110 | 3336600051577 | 1   | 9.5                | 200 | 260 | 113D09.5L0260 | 3336600168497 | 1   |
| 8                  | 50  | 110 | 113D08L0110   | 3336600029392 | 1   | 10                 | 200 | 260 | 113D10L0260   | 3336600154056 | 1   |
| 10                 | 50  | 110 | 113D10L0110   | 3336600055728 | 1   | 12                 | 200 | 260 | 113D12L0260   | 3336600154063 | 1   |
| <b>L 100 x 160</b> |     |     |               |               |     | <b>L 250 x 310</b> |     |     |               |               |     |
| 5                  | 100 | 160 | 113D05L0160   | 3336600110700 | 1   | 6                  | 250 | 310 | 113D06L0310   | 3336600084186 | 1   |
| 5.5                | 100 | 160 | 113D05.5L0160 | 3336600185807 | 1   | 6.5                | 250 | 310 | 113D06.5L0310 | 3336600059443 | 1   |
| 6                  | 100 | 160 | 113D06L0160   | 3336600029408 | 1   | 7                  | 250 | 310 | 113D07L0310   | 3336600077942 | 1   |
| 6.5                | 100 | 160 | 113D06.5L0160 | 3336600051584 | 1   | 8                  | 250 | 310 | 113D08L0310   | 3336600029484 | 1   |
| 7                  | 100 | 160 | 113D07L0160   | 3336600077904 | 1   | 9                  | 250 | 310 | 113D09L0310   | 3336600093645 | 1   |
| 8                  | 100 | 160 | 113D08L0160   | 3336600029415 | 1   | 10                 | 250 | 310 | 113D10L0310   | 3336600029491 | 1   |
| 9                  | 100 | 160 | 113D09L0160   | 3336600093560 | 1   | 12                 | 250 | 310 | 113D12L0310   | 3336600029507 | 1   |
| 10                 | 100 | 160 | 113D10L0160   | 3336600029422 | 1   | 13                 | 250 | 310 | 113D13L0310   | 3336600093676 | 1   |
| 12                 | 100 | 160 | 113D12L0160   | 3336600029439 | 1   | 14                 | 250 | 310 | 113D14L0310   | 3336600077959 | 1   |
| 13                 | 100 | 160 | 113D13L0160   | 3336600093591 | 1   | 15                 | 250 | 310 | 113D15L0310   | 3336600110731 | 1   |
| 14                 | 100 | 160 | 113D14L0160   | 3336600077911 | 1   | 16                 | 250 | 310 | 113D16L0310   | 3336600054264 | 1   |
| 15                 | 100 | 160 | 113D15L0160   | 3336600110717 | 1   | 18                 | 250 | 310 | 113D18L0310   | 3336600054271 | 1   |
| 16                 | 100 | 160 | 113D16L0160   | 3336600110762 | 1   | 20                 | 250 | 310 | 113D20L0310   | 3336600054288 | 1   |
| <b>L 150 x 210</b> |     |     |               |               |     | <b>L 400 x 460</b> |     |     |               |               |     |
| 5.5                | 150 | 210 | 113D05.5L0210 | 3336600185814 | 1   | 8                  | 400 | 460 | 113D08L0460   | 3336600093034 | 1   |
| 6                  | 150 | 210 | 113D06L0210   | 3336600029446 | 1   | 10                 | 400 | 460 | 113D10L0460   | 3336600054295 | 1   |
| 6.5                | 150 | 210 | 113D06.5L0210 | 3336600093607 | 1   | 12                 | 400 | 460 | 113D12L0460   | 3336600054301 | 1   |
| 7                  | 150 | 210 | 113D07L0210   | 3336600077928 | 1   | 14                 | 400 | 460 | 113D14L0460   | 3336600054318 | 1   |
| 8                  | 150 | 210 | 113D08L0210   | 3336600029453 | 1   | 15                 | 400 | 460 | 113D15L0460   | 3336600110748 | 1   |
| 9                  | 150 | 210 | 113D09L0210   | 3336600093614 | 1   | 16                 | 400 | 460 | 113D16L0460   | 3336600054325 | 1   |
| 9.5                | 150 | 210 | 113D09.5L0210 | 3336600168480 | 1   | 18                 | 400 | 460 | 113D18L0460   | 3336600054332 | 1   |
| 10                 | 150 | 210 | 113D10L0210   | 3336600029460 | 1   | 20                 | 400 | 460 | 113D20L0460   | 3336600054349 | 1   |
| 12                 | 150 | 210 | 113D12L0210   | 3336600029477 | 1   | <b>L 550 x 610</b> |     |     |               |               |     |
| 13                 | 150 | 210 | 113D13L0210   | 3336600093638 | 1   | 8                  | 550 | 610 | 113D08L0610   | 3336600099173 | 1   |
| 14                 | 150 | 210 | 113D14L0210   | 3336600077935 | 1   | 10                 | 550 | 610 | 113D10L0610   | 3336600054387 | 1   |
| 15                 | 150 | 210 | 113D15L0210   | 3336600110724 | 1   | 12                 | 550 | 610 | 113D12L0610   | 3336600054394 | 1   |
| 16                 | 150 | 210 | 113D16L0210   | 3336600084155 | 1   | 14                 | 550 | 610 | 113D14L0610   | 3336600054400 | 1   |
| 18                 | 150 | 210 | 113D18L0210   | 3336600084162 | 1   | 16                 | 550 | 610 | 113D16L0610   | 3336600054417 | 1   |
| 20                 | 150 | 210 | 113D20L0210   | 3336600084179 | 1   | 18                 | 550 | 610 | 113D18L0610   | 3336600054424 | 1   |
|                    |     |     |               |               |     | 20                 | 550 | 610 | 113D20L0610   | 3336600054431 | 1   |



Black plastic clip



Ref.  
157K

# Booster Plus **booster PLUS**

Hammer drill bit 3 cutting edges  
compatible SDS+ pack 6 pcs

High performance drill bit for drilling concrete and reinforced concrete.



Reinforced concrete, Concrete, Stone, Brick

**+**

## • DRILL REINFORCED CONCRETE

### Features

- Monobloc carbide tip 3 cutting edges.
- Angle tip 150°.
- Self centering tip.

### Benefits

- Drilling in all types of concrete.
- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

Shank Hammer drill



Compatible  
SDS-plus



Black plastic clip

| Ø                  | WL  | TL  | Ref.         | Gencod        | Qty |
|--------------------|-----|-----|--------------|---------------|-----|
| <b>L 50 x 110</b>  |     |     |              |               |     |
| 6                  | 50  | 110 | 157KD06L0110 | 3336600152359 | 1   |
| <b>L 100 x 160</b> |     |     |              |               |     |
| 6                  | 100 | 160 | 157KD06L0160 | 3336600152366 | 1   |
| 8                  | 100 | 160 | 157KD08L0160 | 3336600152397 | 1   |
| 10                 | 100 | 160 | 157KD10L0160 | 3336600152427 | 1   |
| 12                 | 100 | 160 | 157KD12L0160 | 3336600152458 | 1   |
| 14                 | 100 | 160 | 157KD14L0160 | 3336600152489 | 1   |
| 16                 | 100 | 160 | 157KD16L0160 | 3336600152519 | 1   |
| <b>L 150 x 210</b> |     |     |              |               |     |
| 8                  | 150 | 210 | 157KD08L0210 | 3336600152403 | 1   |
| 10                 | 150 | 210 | 157KD10L0210 | 3336600152434 | 1   |
| 12                 | 150 | 210 | 157KD12L0210 | 3336600152465 | 1   |
| 14                 | 150 | 210 | 157KD14L0210 | 3336600152496 | 1   |
| 16                 | 150 | 210 | 157KD16L0210 | 3336600152526 | 1   |
| <b>L 250 x 310</b> |     |     |              |               |     |
| 16                 | 250 | 310 | 157KD16L0310 | 3336600152533 | 1   |



see our  
video on  
**YouTube**



Ref.  
157L

# Booster Plus **booster PLUS**

Hammer drill bit 3 cutting edges  
compatible SDS+ pack 12 pcs

High performance drill bit for drilling concrete and reinforced concrete.



Reinforced concrete, Concrete, Stone, Brick

## • DRILL REINFORCED CONCRETE


### Features

- Monobloc carbide tip 3 cutting edges.
- Angle tip 150°.
- Self centering tip.

### Benefits

- Drilling in all types of concrete.
- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

Shank Hammer drill



Compatible  
SDS-plus



Black plastic clip

| Ø                  | WL  | TL  | Ref.           | Gencod        | Qty |
|--------------------|-----|-----|----------------|---------------|-----|
| <b>L 50 x 110</b>  |     |     |                |               |     |
| 5                  | 50  | 110 | 157LD05L0110   | 3336600152540 | 1   |
| 6                  | 50  | 110 | 157LD06L0110   | 3336600152564 | 1   |
| 8                  | 50  | 110 | 157LD08L0110   | 3336600152595 | 1   |
| <b>L 100 x 160</b> |     |     |                |               |     |
| 5                  | 100 | 160 | 157LD05L0160   | 3336600152557 | 1   |
| 6                  | 100 | 160 | 157LD06L0160   | 3336600152571 | 1   |
| 8                  | 100 | 160 | 157LD08L0160   | 3336600152601 | 1   |
| 10                 | 100 | 160 | 157LD10L0160   | 3336600152632 | 1   |
| 12                 | 100 | 160 | 157LD12L0160   | 3336600152663 | 1   |
| <b>L 150 x 210</b> |     |     |                |               |     |
| 6                  | 150 | 210 | 157LD06L0210   | 3336600152588 | 1   |
| 6.5                | 150 | 210 | 157LD06.5L0210 | 3336600164727 | 1   |
| 8                  | 150 | 210 | 157LD08L0210   | 3336600152618 | 1   |
| 10                 | 150 | 210 | 157LD10L0210   | 3336600152649 | 1   |
| 12                 | 150 | 210 | 157LD12L0210   | 3336600152670 | 1   |
| <b>L 200 x 260</b> |     |     |                |               |     |
| 6                  | 200 | 260 | 157LD06L0260   | 3336600162693 | 1   |
| 8                  | 200 | 260 | 157LD08L0260   | 3336600158818 | 1   |
| 10                 | 200 | 260 | 157LD10L0260   | 3336600159068 | 1   |
| 12                 | 200 | 260 | 157LD12L0260   | 3336600158825 | 1   |
| 14                 | 200 | 260 | 157LD14L0260   | 3336600197909 | 1   |
| 16                 | 200 | 260 | 157LD16L0260   | 3336600162709 | 1   |
| <b>L 250 x 310</b> |     |     |                |               |     |
| 8                  | 250 | 310 | 157LD08L0310   | 3336600152625 | 1   |
| 10                 | 250 | 310 | 157LD10L0310   | 3336600152656 | 1   |
| 12                 | 250 | 310 | 157LD12L0310   | 3336600152687 | 1   |
| <b>L 400 x 460</b> |     |     |                |               |     |
| 8                  | 400 | 460 | 157LD08L0460   | 3336600183346 | 1   |
| 10                 | 400 | 460 | 157LD10L0460   | 3336600159075 | 1   |
| 12                 | 400 | 460 | 157LD12L0460   | 3336600159082 | 1   |
| <b>L 550 x 610</b> |     |     |                |               |     |
| 10                 | 550 | 610 | 157LD10L0610   | 3336600159099 | 1   |
| 12                 | 550 | 610 | 157LD12L0610   | 3336600159105 | 1   |



Ref.  
157M

# Booster Plus

**booster PLUS**

Hammer drill bit 3 cutting edges  
compatible SDS+ pack 25 pcs

High performance drill bit for drilling concrete and reinforced concrete.



## • DRILL REINFORCED CONCRETE

### Features

- Monobloc carbide tip 3 cutting edges.
- Angle tip 150°.
- Self centering tip.


### Benefits

- Drilling in all types of concrete.
- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.



Reinforced concrete, Concrete, Stone, Brick

Shank Hammer drill



Compatible  
SDS-plus



Black plastic clip

| Ø                  | WL  | TL  | Ref.         | Gencod        | Qty |
|--------------------|-----|-----|--------------|---------------|-----|
| <b>L 50 x 110</b>  |     |     |              |               |     |
| 5                  | 50  | 110 | 157MD05L0110 | 3336600152694 | 1   |
| 6                  | 50  | 110 | 157MD06L0110 | 3336600152717 | 1   |
| 8                  | 50  | 110 | 157MD08L0110 | 3336600152748 | 1   |
| <b>L 100 x 160</b> |     |     |              |               |     |
| 5                  | 100 | 160 | 157MD05L0160 | 3336600152700 | 1   |
| 6                  | 100 | 160 | 157MD06L0160 | 3336600152724 | 1   |
| 8                  | 100 | 160 | 157MD08L0160 | 3336600152755 | 1   |
| 10                 | 100 | 160 | 157MD10L0160 | 3336600152786 | 1   |
| 12                 | 100 | 160 | 157MD12L0160 | 3336600152816 | 1   |
| <b>L 150 x 210</b> |     |     |              |               |     |
| 6                  | 150 | 210 | 157MD06L0210 | 3336600152731 | 1   |
| 8                  | 150 | 210 | 157MD08L0210 | 3336600152762 | 1   |
| 10                 | 150 | 210 | 157MD10L0210 | 3336600152793 | 1   |
| 12                 | 150 | 210 | 157MD12L0210 | 3336600152823 | 1   |
| <b>L 250 x 310</b> |     |     |              |               |     |
| 8                  | 250 | 310 | 157MD08L0310 | 3336600152779 | 1   |
| 10                 | 250 | 310 | 157MD10L0310 | 3336600152809 | 1   |



see our  
video on  
**YouTube**



Ref.  
108

# Booster Plus depth stop

Hammer drill bit 3 cutting edges  
compatible SDS+

SDS+ drill bit 3 cutting edges with depth stop system, special drop in anchors.



## • PERFECT HOLES CALIBRATION

### Features

- Monobloc carbide tip 3 cutting edges.
- Angle tip 150°.
- Self centering tip.
- Depth stop system.

### Benefits

- Drilling in all types of concrete.
- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

### Applications

- Installation of cable trays.
- Fixing in series.



Reinforced concrete, Concrete, Stone, Brick

Shank Hammer drill




Compatible  
SDS-plus



Black plastic clip

| Ø  | WL | TL  | Ref.        | Gencod        | Qty |
|----|----|-----|-------------|---------------|-----|
| 8  | 27 | 110 | 108D08L0027 | 3336600181137 | 1   |
| 10 | 33 | 110 | 108D10L0033 | 3336600184381 | 1   |
| 12 | 43 | 130 | 108D12L0043 | 3336600184398 | 1   |
| 15 | 52 | 160 | 108D15L0052 | 3336600181168 | 1   |
| 15 | 54 | 160 | 108D15L0054 | 3336600184404 | 1   |



| Thread x Lt | d <sub>0</sub><br>mm | h <sub>1</sub><br>mm |
|-------------|----------------------|----------------------|
| M6x25       | 8                    | 25                   |
| M8x30       | 10                   | 30                   |
| M10x40      | 12                   | 40                   |
| M12x50      | 15                   | 50                   |
| M16x65      | 20                   | 65                   |

Ref.  
102

# Booster Plus windows frame

Windows frame hammer drill bit 3 cutting edges compatible SDS+

SDS+ drill bit 3 cutting edges flex system for windows frame.



## • BENDING STRENGTH

### Features

- Monobloc carbide tip 3 cutting edges.
- Angle tip 150°.
- Self centering tip.
- Reinforcement zone.

### Benefits

- Drilling in all types of concrete.
- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

### Applications

- Installation of window frames.



Reinforced concrete, Concrete, Stone, Brick, Breeze block

Shank Hammer drill




Compatible SDS-plus



Black plastic clip

| Ø                  | WL  | TL  | Ref.          | Gencod        | Qty |
|--------------------|-----|-----|---------------|---------------|-----|
| <b>L 150 x 210</b> |     |     |               |               |     |
| 6                  | 150 | 210 | 102D06.L0210  | 3336600157163 | 1   |
| 6.5                | 150 | 210 | 102D06.5L0210 | 3336600157187 | 1   |
| <b>L 200 x 260</b> |     |     |               |               |     |
| 6                  | 200 | 260 | 102D06.L0260  | 3336600157170 | 1   |
| 6.5                | 200 | 260 | 102D06.5L0260 | 3336600157194 | 1   |
| <b>L 250 x 310</b> |     |     |               |               |     |
| 6.5                | 250 | 310 | 102D06.5L0310 | 3336600169586 | 1   |

**FLEX**





Ref.  
103

# Windows frame hammer drill bit 3 cutting edges compatible SDS+


SDS+ drill bit 3 cutting edges flex system for windows frame - pack 12 pcs.



Black plastic clip

| Ø                  | WL  | TL  | Ref.          | Gencod        | Qty |
|--------------------|-----|-----|---------------|---------------|-----|
| <b>L 200 x 260</b> |     |     |               |               |     |
| 6.5                | 200 | 260 | 103D06.5L0260 | 3336600162716 | 1   |

## APPLICATIONS

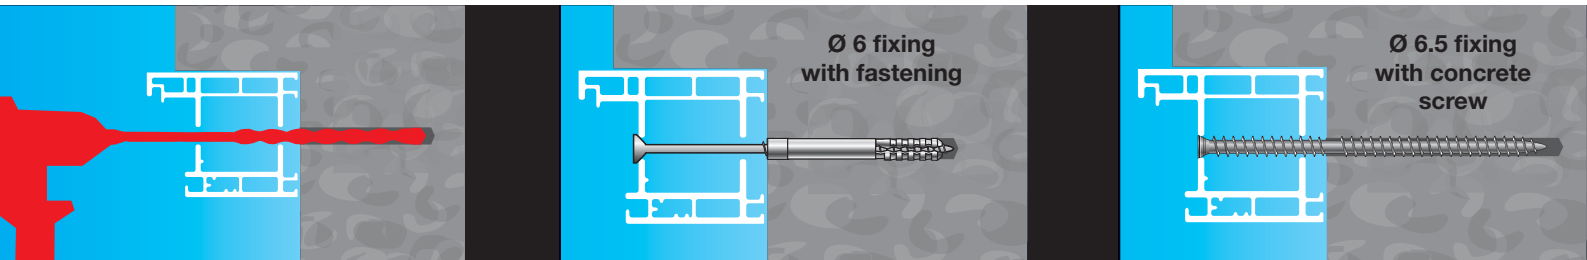

Ref. 112

# 4G4 drill bit



Hammer drill bit 4 cutting edges compatible SDS+

SDS+ drill bit made of high quality alloy steel with a premium tungsten carbide 4 cutters tip, guarantees performances even in the hardest concrete.



Concrete, Stone, Brick, Breeze block



## LONG LIFE

### Features

- Monobloc carbide tip 4 cutting edges.
- 4 evacuation grooves.
- Centering tip.

### Benefits

- Long life.
- Fast dust evacuation.
- Torsion resistance.

Shank Hammer drill



Compatible SDS-plus

| Ø                        | WL  | TL  | Ref.          | Gencod        | Qty | Ø                  | WL  | TL  | Ref.          | Gencod        | Qty |
|--------------------------|-----|-----|---------------|---------------|-----|--------------------|-----|-----|---------------|---------------|-----|
| <b>L 50 x 110</b>        |     |     |               |               |     | <b>L 250 x 310</b> |     |     |               |               |     |
| 5                        | 50  | 110 | 112D05L0110   | 3336600201361 | 1   | 6                  | 250 | 310 | 112D06L0310   | 3336600196193 | 1   |
| 5.5                      | 50  | 110 | 112D05.5L0110 | 3336600201347 | 1   | 6.5                | 250 | 310 | 112D06.5L0310 | 3336600196216 | 1   |
| 6                        | 50  | 110 | 112D06L0110   | 3336600196155 | 1   | 8                  | 250 | 310 | 112D08L0310   | 3336600196261 | 1   |
| 6.5                      | 50  | 110 | 112D06.5L0110 | 3336600201378 | 1   | 10                 | 250 | 310 | 112D10L0310   | 3336600196308 | 1   |
| 8                        | 50  | 110 | 112D08L0110   | 3336600196223 | 1   | 12                 | 250 | 310 | 112D12L0310   | 3336600196353 | 1   |
| <b>L 100 x 160</b>       |     |     |               |               |     | <b>L 400 x 460</b> |     |     |               |               |     |
| 5.5                      | 100 | 160 | 112D05.5L0160 | 3336600201354 | 1   | 8                  | 400 | 460 | 112D08L0460   | 3336600201385 | 1   |
| 6                        | 100 | 160 | 112D06L0160   | 3336600196162 | 1   | 10                 | 400 | 460 | 112D10L0460   | 3336600196315 | 1   |
| 6.5                      | 100 | 160 | 112D06.5L0160 | 3336600196896 | 1   | 12                 | 400 | 460 | 112D12L0460   | 3336600196360 | 1   |
| 8                        | 100 | 160 | 112D08L0160   | 3336600196230 | 1   | 14                 | 400 | 460 | 112D14L0460   | 3336600196391 | 1   |
| 10                       | 100 | 160 | 112D10L0160   | 3336600196278 | 1   | 16                 | 400 | 460 | 112D16L0460   | 3336600196421 | 1   |
| 12                       | 100 | 160 | 112D12L0160   | 3336600196322 | 1   | 18                 | 400 | 460 | 112D18L0460   | 3336600201446 | 1   |
| 13                       | 100 | 160 | 112D13L0160   | 3336600201392 | 1   | 20                 | 400 | 460 | 112D20L0460   | 3336600196452 | 1   |
| 14                       | 100 | 160 | 112D14L0160   | 3336600201408 | 1   | 22                 | 400 | 460 | 112D22L0460   | 3336600201460 | 1   |
| 15                       | 100 | 160 | 112D15L0160   | 3336600201415 | 1   | 24                 | 400 | 460 | 112D24L0460   | 3336600201484 | 1   |
| 16                       | 100 | 160 | 112D16L0160   | 3336600201439 | 1   | 25                 | 400 | 460 | 112D25L0460   | 3336600201507 | 1   |
| <b>L 150 x 210</b>       |     |     |               |               |     | <b>L 200 x 260</b> |     |     |               |               |     |
| 6                        | 150 | 210 | 112D06L0210   | 3336600196179 | 1   | 6                  | 200 | 260 | 112D06L0260   | 3336600196186 | 1   |
| 6.5                      | 150 | 210 | 112D06.5L0210 | 3336600196209 | 1   | 8                  | 200 | 260 | 112D08L0260   | 3336600196254 | 1   |
| 8                        | 150 | 210 | 112D08L0210   | 3336600196247 | 1   | 10                 | 200 | 260 | 112D10L0260   | 3336600196292 | 1   |
| 10                       | 150 | 210 | 112D10L0210   | 3336600196285 | 1   | 12                 | 200 | 260 | 112D12L0260   | 3336600196346 | 1   |
| 12                       | 150 | 210 | 112D12L0210   | 3336600196339 | 1   | 22                 | 200 | 260 | 112D22L0260   | 3336600201453 | 1   |
| 14                       | 150 | 210 | 112D14L0210   | 3336600196377 | 1   | 24                 | 200 | 260 | 112D24L0260   | 3336600201477 | 1   |
| 15                       | 150 | 210 | 112D15L0210   | 3336600201422 | 1   | 25                 | 200 | 260 | 112D25L0260   | 3336600201491 | 1   |
| 16                       | 150 | 210 | 112D16L0210   | 3336600196407 | 1   | 26                 | 200 | 260 | 112D26L0260   | 3336600201514 | 1   |
| <b>* 6 cutting edges</b> |     |     |               |               |     |                    |     |     |               |               |     |



Grey plastic clip

ALL SETS PAGES 120-121



112Q





Diager: A family business since 1953, a French industrialist with recognized know-how, and a know-how that we cultivate daily. It is also a state of mind, of deep values that guide our actions.

Diager: A “Made In Jura” company that is expanding its reach well beyond French borders with a mexican, Diamex, and a German, USH, implantation. It is a real desire to be alongside our customers, to support them. Always with this “Diager spirit” which testifies to our daily involvement.




Ref.  
110

# Twister Plus



Hammer drill bit 2 cutting edges  
compatible SDS+

Special carbide tip profile combined with TRI-ZONES helix reduce drilling time, limits wear and increases drill bit life time.



Concrete, Stone, Brick, Breeze block



## FAST DRILLING

### Features

- Concrete breaker tip.
- «Z» line centering tip.
- Variable helix 3 zone.

### Benefits

- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

Shank Hammer drill



Compatible  
SDS-plus

| Ø                  | WL  | TL  | Ref.          | Gencod        | Qty | Ø                  | WL  | TL  | Ref.          | Gencod        | Qty |
|--------------------|-----|-----|---------------|---------------|-----|--------------------|-----|-----|---------------|---------------|-----|
| <b>L 50 x 110</b>  |     |     |               |               |     | <b>L 100 x 160</b> |     |     |               |               |     |
| 4                  | 50  | 110 | 110D04L0110   | 3336600008359 | 1   | 4                  | 100 | 160 | 110D04L0160   | 3336600006783 | 1   |
| 5                  | 50  | 110 | 110D05L0110   | 3336600008366 | 1   | 5                  | 100 | 160 | 110D05L0160   | 3336600008410 | 1   |
| 5.5                | 50  | 110 | 110D05.5L0110 | 3336600023253 | 1   | 5.5                | 100 | 160 | 110D05.5L0160 | 3336600023277 | 1   |
| 6                  | 50  | 110 | 110D06L0110   | 3336600008373 | 1   | 6                  | 100 | 160 | 110D06L0160   | 3336600008427 | 1   |
| 6.5                | 50  | 110 | 110D06.5L0110 | 3336600023260 | 1   | 6.5                | 100 | 160 | 110D06.5L0160 | 3336600020849 | 1   |
| 7                  | 50  | 110 | 110D07L0110   | 3336600008380 | 1   | 7                  | 100 | 160 | 110D07L0160   | 3336600008434 | 1   |
| 8                  | 50  | 110 | 110D08L0110   | 3336600008397 | 1   | 8                  | 100 | 160 | 110D08L0160   | 3336600008441 | 1   |
| 10                 | 50  | 110 | 110D10L0110   | 3336600008403 | 1   | 9                  | 100 | 160 | 110D09L0160   | 3336600008458 | 1   |
| <b>L 150 x 210</b> |     |     |               |               |     | <b>L 200 x 260</b> |     |     |               |               |     |
| 5                  | 150 | 210 | 110D05L0210   | 3336600076457 | 1   | 5.5                | 200 | 260 | 110D05.5L0260 | 3336600185647 | 1   |
| 6                  | 150 | 210 | 110D06L0210   | 3336600008533 | 1   | 6                  | 200 | 260 | 110D06L0260   | 3336600008663 | 1   |
| 6.5                | 150 | 210 | 110D06.5L0210 | 3336600020856 | 1   | 6.5                | 200 | 260 | 110D06.5L0260 | 3336600076389 | 1   |
| 7                  | 150 | 210 | 110D07L0210   | 3336600020863 | 1   | 7                  | 200 | 260 | 110D07L0260   | 3336600021556 | 1   |
| 8                  | 150 | 210 | 110D08L0210   | 3336600008540 | 1   | 8                  | 200 | 260 | 110D08L0260   | 3336600008670 | 1   |
| 9                  | 150 | 210 | 110D09L0210   | 3336600008557 | 1   | 10                 | 200 | 260 | 110D10L0260   | 3336600008687 | 1   |
| 10                 | 150 | 210 | 110D10L0210   | 3336600008564 | 1   | 12                 | 200 | 260 | 110D12L0260   | 3336600008694 | 1   |
| 11                 | 150 | 210 | 110D11L0210   | 3336600030107 | 1   | 13                 | 200 | 260 | 110D13L0260   | 3336600008700 | 1   |
| <b>L 250 x 310</b> |     |     |               |               |     | <b>L 250 x 310</b> |     |     |               |               |     |
|                    |     |     |               |               |     | 5                  | 250 | 310 | 110D05L0310   | 3336600166189 | 1   |
|                    |     |     |               |               |     | 5.5                | 250 | 310 | 110D05.5L0310 | 3336600185654 | 1   |
|                    |     |     |               |               |     | 6                  | 250 | 310 | 110D06L0310   | 3336600023291 | 1   |
|                    |     |     |               |               |     | 8                  | 250 | 310 | 110D08L0310   | 3336600023307 | 1   |
|                    |     |     |               |               |     | 10                 | 250 | 310 | 110D10L0310   | 3336600023314 | 1   |
|                    |     |     |               |               |     | 12                 | 250 | 310 | 110D12L0310   | 3336600023321 | 1   |






| Ø                  | WL  | TL  | Ref.        | Gencod        | Qty | Ø                   | WL  | TL   | Ref.        | Gencod        | Qty |  |
|--------------------|-----|-----|-------------|---------------|-----|---------------------|-----|------|-------------|---------------|-----|--|
| 13                 | 250 | 310 | 110D13L0310 | 3336600054950 | 1   | 22                  | 400 | 460  | 110D22L0460 | 3336600023512 | 1   |  |
| 14                 | 250 | 310 | 110D14L0310 | 3336600023338 | 1   | 24                  | 400 | 460  | 110D24L0460 | 3336600023529 | 1   |  |
| 15                 | 250 | 310 | 110D15L0310 | 3336600023345 | 1   | 25                  | 400 | 460  | 110D25L0460 | 3336600023536 | 1   |  |
| 16                 | 250 | 310 | 110D16L0310 | 3336600023352 | 1   | 26                  | 400 | 460  | 110D26L0460 | 3336600164802 | 1   |  |
| 18                 | 250 | 310 | 110D18L0310 | 3336600023369 | 1   | 28                  | 400 | 460  | 110D28L0460 | 3336600164833 | 1   |  |
| 20                 | 250 | 310 | 110D20L0310 | 3336600023376 | 1   | 30                  | 400 | 460  | 110D30L0460 | 3336600164857 | 1   |  |
| 22                 | 250 | 310 | 110D22L0310 | 3336600023383 | 1   | <b>L 550 x 610</b>  |     |      |             |               |     |  |
| 24                 | 250 | 310 | 110D24L0310 | 3336600023390 | 1   | 8                   | 550 | 610  | 110D08L0610 | 3336600008908 | 1   |  |
| 25                 | 250 | 310 | 110D25L0310 | 3336600023406 | 1   | 10                  | 550 | 610  | 110D10L0610 | 3336600008915 | 1   |  |
| 26                 | 250 | 310 | 110D26L0310 | 3336600164796 | 1   | 12                  | 550 | 610  | 110D12L0610 | 3336600008922 | 1   |  |
| 28                 | 250 | 310 | 110D28L0310 | 3336600164826 | 1   | 14                  | 550 | 610  | 110D14L0610 | 3336600008946 | 1   |  |
| <b>L 350 x 410</b> |     |     |             |               |     | 16                  | 550 | 610  | 110D16L0610 | 3336600008953 | 1   |  |
| 8                  | 350 | 410 | 110D08L0410 | 3336600008786 | 1   | 18                  | 550 | 610  | 110D18L0610 | 3336600008960 | 1   |  |
| 10                 | 350 | 410 | 110D10L0410 | 3336600008793 | 1   | 20                  | 550 | 610  | 110D20L0610 | 3336600008977 | 1   |  |
| 12                 | 350 | 410 | 110D12L0410 | 3336600008809 | 1   | 22                  | 550 | 610  | 110D22L0610 | 3336600008984 | 1   |  |
| 13                 | 350 | 410 | 110D13L0410 | 3336600008816 | 1   | 24                  | 550 | 610  | 110D24L0610 | 3336600027367 | 1   |  |
| 14                 | 350 | 410 | 110D14L0410 | 3336600008823 | 1   | 25                  | 550 | 610  | 110D25L0610 | 3336600008991 | 1   |  |
| 16                 | 350 | 410 | 110D16L0410 | 3336600008847 | 1   | 26                  | 550 | 610  | 110D26L0610 | 3336600164819 | 1   |  |
| 18                 | 350 | 410 | 110D18L0410 | 3336600008854 | 1   | <b>L 940 x 1000</b> |     |      |             |               |     |  |
| 20                 | 350 | 410 | 110D20L0410 | 3336600008878 | 1   | 8                   | 940 | 1000 | 110D08L1000 | 3336600009004 | 1   |  |
| 22                 | 350 | 410 | 110D22L0410 | 3336600008885 | 1   | 10                  | 940 | 1000 | 110D10L1000 | 3336600009011 | 1   |  |
| 24                 | 350 | 410 | 110D24L0410 | 3336600014831 | 1   | 12                  | 940 | 1000 | 110D12L1000 | 3336600009028 | 1   |  |
| 25                 | 350 | 410 | 110D25L0410 | 3336600008892 | 1   | 14                  | 940 | 1000 | 110D14L1000 | 3336600009035 | 1   |  |
| <b>L 400 x 460</b> |     |     |             |               |     | 16                  | 940 | 1000 | 110D16L1000 | 3336600009042 | 1   |  |
| 6                  | 400 | 460 | 110D06L0460 | 3336600119369 | 1   | 18                  | 940 | 1000 | 110D18L1000 | 3336600009059 | 1   |  |
| 8                  | 400 | 460 | 110D08L0460 | 3336600023413 | 1   | 20                  | 940 | 1000 | 110D20L1000 | 3336600009066 | 1   |  |
| 10                 | 400 | 460 | 110D10L0460 | 3336600023420 | 1   | 22                  | 940 | 1000 | 110D22L1000 | 3336600009073 | 1   |  |
| 12                 | 400 | 460 | 110D12L0460 | 3336600023437 | 1   | 25                  | 940 | 1000 | 110D25L1000 | 3336600009080 | 1   |  |
| 14                 | 400 | 460 | 110D14L0460 | 3336600023451 | 1   |                     |     |      |             |               |     |  |
| 16                 | 400 | 460 | 110D16L0460 | 3336600023475 | 1   |                     |     |      |             |               |     |  |
| 18                 | 400 | 460 | 110D18L0460 | 3336600023482 | 1   |                     |     |      |             |               |     |  |
| 20                 | 400 | 460 | 110D20L0460 | 3336600023505 | 1   |                     |     |      |             |               |     |  |



Grey plastic clip


## New TRI-ZONE Flute

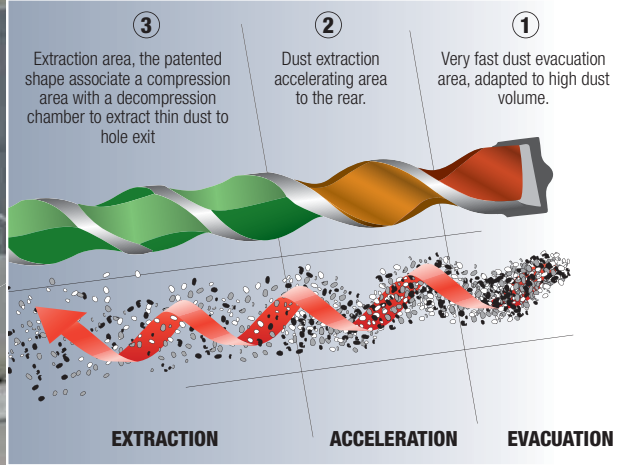

## New Carbide Tip

### 3 CONTACT POINTS

Focus the percussion efforts to the drilling axis. Increase the speed, the destruction power and the accuracy.



### Z FORM SHARP TIP

Chiseling effect and aggressivity increased. High accuracy on the hole starting.



ALL SETS  
PAGES 120-121



102C



100C



136C



105D




116D

Ref.  
108L

# Twister Plus



Hammer drill bit 2 cutting edges  
compatible SDS+ pack 12 pcs



Concrete, Stone, Brick, Breeze block

**+**

• **FAST DRILLING**

**Features**

- Concrete breaker tip.
- «Z» line centering tip.
- Variable helix 3 zone.

**Benefits**

- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.

Shank Hammer drill



Compatible  
SDS-plus



Quadropack

| Ø                  | WL  | TL  | Ref.         | Gencod        | Qty |
|--------------------|-----|-----|--------------|---------------|-----|
| <b>L 50 x 110</b>  |     |     |              |               |     |
| 5                  | 50  | 110 | 108LD05L0110 | 3336600152113 | 1   |
| 6                  | 50  | 110 | 108LD06L0110 | 3336600186873 | 1   |
| 8                  | 50  | 110 | 108LD08L0110 | 3336600152168 | 1   |
| <b>L 100 x 160</b> |     |     |              |               |     |
| 5                  | 100 | 160 | 108LD05L0160 | 3336600152120 | 1   |
| 6                  | 100 | 160 | 108LD06L0160 | 3336600152137 | 1   |
| 7                  | 100 | 160 | 108LD07L0160 | 3336600152151 | 1   |
| 8                  | 100 | 160 | 108LD08L0160 | 3336600152175 | 1   |
| 10                 | 100 | 160 | 108LD10L0160 | 3336600152205 | 1   |
| 12                 | 100 | 160 | 108LD12L0160 | 3336600152229 | 1   |
| 14                 | 100 | 160 | 108LD14L0160 | 3336600152250 | 1   |
| <b>L 150 x 210</b> |     |     |              |               |     |
| 6                  | 150 | 210 | 108LD06L0210 | 3336600152144 | 1   |
| 8                  | 150 | 210 | 108LD08L0210 | 3336600152182 | 1   |
| 10                 | 150 | 210 | 108LD10L0210 | 3336600152212 | 1   |
| 12                 | 150 | 210 | 108LD12L0210 | 3336600152236 | 1   |
| 16                 | 150 | 210 | 108LD16L0210 | 3336600152267 | 1   |
| <b>L 200 x 260</b> |     |     |              |               |     |
| 6                  | 200 | 260 | 108LD06L0260 | 3336600157484 | 1   |
| 8                  | 200 | 260 | 108LD08L0260 | 3336600157491 | 1   |
| 10                 | 200 | 260 | 108LD10L0260 | 3336600157507 | 1   |
| 12                 | 200 | 260 | 108LD12L0260 | 3336600157514 | 1   |
| 14                 | 200 | 260 | 108LD14L0260 | 3336600157521 | 1   |
| <b>L 250 x 310</b> |     |     |              |               |     |
| 8                  | 250 | 310 | 108LD08L0310 | 3336600152199 | 1   |
| 12                 | 250 | 310 | 108LD12L0310 | 3336600152243 | 1   |
| 16                 | 250 | 310 | 108LD16L0310 | 3336600152274 | 1   |





Ref.  
108R

# Twister Plus



Hammer drill bit 2 cutting edges  
compatible SDS+ pack 50 pcs



## • FAST DRILLING

### Features

- Concrete breaker tip.
- «Z» line centering tip.
- Variable helix 3 zone.

### Benefits

- Accuracy in starting the hole.
- Perfectly round and calibrated hole.
- Fast dust evacuation.
- Resistance and long life.



Concrete, Stone, Brick, Breeze block

Shank Hammer drill



Compatible  
SDS-plus



Quadropack

| Ø                  | WL  | TL  | Ref.         | Gencod        | Qty |
|--------------------|-----|-----|--------------|---------------|-----|
| <b>L 50 x 110</b>  |     |     |              |               |     |
| 5                  | 50  | 110 | 108RD05L0110 | 3336600152281 | 1   |
| 6                  | 50  | 110 | 108RD06L0110 | 3336600152298 | 1   |
| 8                  | 50  | 110 | 108RD08L0110 | 3336600182998 | 1   |
| <b>L 100 x 160</b> |     |     |              |               |     |
| 6                  | 100 | 160 | 108RD06L0160 | 3336600152304 | 1   |
| 8                  | 100 | 160 | 108RD08L0160 | 3336600152311 | 1   |
| 10                 | 100 | 160 | 108RD10L0160 | 3336600152328 | 1   |
| <b>L 200 x 260</b> |     |     |              |               |     |
| 8                  | 200 | 260 | 108RD08L0260 | 3336600168282 | 1   |




Ref.  
104

# Wallster



Hollow block hammer drill bit 2 cutting edges compatible SDS+

Specially designed to drill through hollow bricks and hollow blocks without damaging wall. Allows to make quality holes that make the anchors more reliable.



• NOT DAMAGED WALL = OPTIMIZED ANCHORING

### Features

- Semi positive tip.
- Tip angle 130°.
- Micro percussion system.
- Long pitch.
- Impact reducer.

### Benefits

- Hollow block wall is not damaged.
- Perfectly round and calibrated hole.
- Increases the strength of the anchors.
- Drill bit stay in the drilling axis.
- Drilling through insulations.

### Applications

- Anchoring in hollow block.



Breeze block, Hollow brick

Shank Hammer drill



Compatible SDS-plus

| Ø                  | WL  | TL  | Ref.        | Gencod        | Qty |
|--------------------|-----|-----|-------------|---------------|-----|
| <b>L 100 x 160</b> |     |     |             |               |     |
| 5                  | 100 | 160 | 104D05L0160 | 3336600187214 | 1   |
| 6                  | 100 | 160 | 104D06L0160 | 3336600187221 | 1   |
| 8                  | 100 | 160 | 104D08L0160 | 3336600187238 | 1   |
| 10                 | 100 | 160 | 104D10L0160 | 3336600187245 | 1   |
| <b>L 200 x 260</b> |     |     |             |               |     |
| 6                  | 200 | 260 | 104D06L0260 | 3336600182240 | 1   |
| 8                  | 200 | 260 | 104D08L0260 | 3336600182103 | 1   |
| 10                 | 200 | 260 | 104D10L0260 | 3336600182110 | 1   |
| 12                 | 200 | 260 | 104D12L0260 | 3336600182127 | 1   |
| 14                 | 200 | 260 | 104D14L0260 | 3336600182134 | 1   |
| 16                 | 200 | 260 | 104D16L0260 | 3336600182141 | 1   |
| <b>L 400 x 460</b> |     |     |             |               |     |
| 8                  | 400 | 460 | 104D08L0460 | 3336600182158 | 1   |
| 10                 | 400 | 460 | 104D10L0460 | 3336600182165 | 1   |



PLV picking-counter 30 drills to choose Delevry unmounted Ref.C00084



**UP TO 3  
TIMES  
STRONGER  
RESISTANCE**

**COMPARATIVE TESTS : DRILLING AND ANCHORING IN A HOLLOW BLOCK**

**STANDARD drill bit**



**250 Kg**  
↑  
Pull out resistance

**Drilling**  
The wall is damaged, only 7mm thickness remains.

**Test of tearing for a chemical fixing**  
The fixation quickly gives in. Break in 250 kg.



**Hammer drill WALLSTER**



**700 Kg**  
↑  
Pull out resistance


**Drilling**  
The wall is intact, and keeps its original thickness of 16mm.

**Test of tearing for a chemical fixing**  
The fixation resists perfectly. It is the wall which gives in. Break in 700 kg.



**EFFICIENT IN ALL HOLLOW BLOCKS OF THE MARKET**

Slap, breeze block, breeze block Easytherm®, Rubbe, hollow brick, brick for bonding, brick pole, brick rabbet Wienerberger®, plank, brick of arase...



*Diager developed specially a bit to drill hollow blocks without degrading walls. This special dill bit for hollow blocks allows to realize qualitative holes which enhance reliability of the anchorings.*

Ref.  
184

# Granit

Granit hammer drill bit 2 cutting edges compatible SDS+

Drill specially designed for drilling granit rock (class 1 to 3) and ceramics.



## • DRILLING INTO GRANIT CLASS 1 TO 3

### Features


- Special carbide tip for granit rock.
- Tip angle 130°.

### Benefits

- To drill into granit rock up to class 3.

### Applications

- Installation of granite worktop.



Granit, Concrete, Stone, Ceramic tile, Brick

Shank Hammer drill



Compatible SDS-plus

| Ø                  | WL  | TL  | Ref.        | Gencod        | Qty |
|--------------------|-----|-----|-------------|---------------|-----|
| <b>L 25 x 85</b>   |     |     |             |               |     |
| 3                  | 25  | 85  | 184D03L0085 | 3336600023802 | 1   |
| <b>L 50 x 110</b>  |     |     |             |               |     |
| 4                  | 50  | 110 | 184D04L0110 | 3336600023819 | 1   |
| 5                  | 50  | 110 | 184D05L0110 | 3336600022119 | 1   |
| 6                  | 50  | 110 | 184D06L0110 | 3336600022126 | 1   |
| 8                  | 50  | 110 | 184D08L0110 | 3336600022133 | 1   |
| 10                 | 50  | 110 | 184D10L0110 | 3336600023826 | 1   |
| <b>L 100 x 160</b> |     |     |             |               |     |
| 4                  | 100 | 160 | 184D04L0160 | 3336600023833 | 1   |
| 5                  | 100 | 160 | 184D05L0160 | 3336600023840 | 1   |
| 6                  | 100 | 160 | 184D06L0160 | 3336600022140 | 1   |
| 7                  | 100 | 160 | 184D07L0160 | 3336600054714 | 1   |
| 8                  | 100 | 160 | 184D08L0160 | 3336600022157 | 1   |
| 10                 | 100 | 160 | 184D10L0160 | 3336600022164 | 1   |
| 12                 | 100 | 160 | 184D12L0160 | 3336600023857 | 1   |
| 14                 | 100 | 160 | 184D14L0160 | 3336600183407 | 1   |
| 16                 | 100 | 160 | 184D16L0160 | 3336600183414 | 1   |



Black plastic clip



# 100% SDS-PLUS

| Features  | Ref.   | Gencod        |
|---|--------|---------------|
| POS-COUNTER SDS-PLUS (48PCS)                            | C00115 | 3336600201804 |
| IOP SHELF TALKER BOOSTER-plus                           | B00507 | 3336609008619 |
| IOP SHELF TALKER 4G4                                    | B00510 | 3336609008800 |
| IOP SHELF TALKER TWISTER-PLUS                           | B00519 | 3336609010452 |
| TWIN STICK  | M00075 | 3336600196964 |
| BIN WITH REMOVAL DIVIDER<br>(Width 500mm x Depth 500mm) | M00197 | 333660900809  |
| MONOBLOC DISPLAY  | M00171 | 3336609006844 |
| PR 24 DISPLAY - STRUCTURE ONLY<br>(delivered flat)      | M00135 | 3336609007643 |
| 6 HOOKS RACK (with label holder)                        | M00101 | 3336609008640 |

## POS-Counter

To promote SDS-plus drill bits,  
packaged on plastic clip.  
Contains 48 locations :  
6 facing, 8 deep.  
Delivered to be shaped.  
Réf. C00115



## Storage bin

For storing SDS-plus drill bits delivered in quadropack or twistpack.  
Removal dividers delivered with the display. Arranged on shelf,  
bottom of sales shelf. Magnetic bottom for optimal stability.  
Ref. M00197

## DI SPLAY PRONG

To be arranged on a counter  
or hung on perforated metal sheet.



## Monobloc version

18 simple hooks. No label holders.  
Ref. M00170



## Disassembled version


Can contain up to jusqu'à 4 racks of 6 double hooks.  
Double label holder on each rack. Ref. M00135



NEW SDS-MAX DRILL BIT

# ULTIMAX 646

100% CARBIDE HEAD - 10 CUTTERS

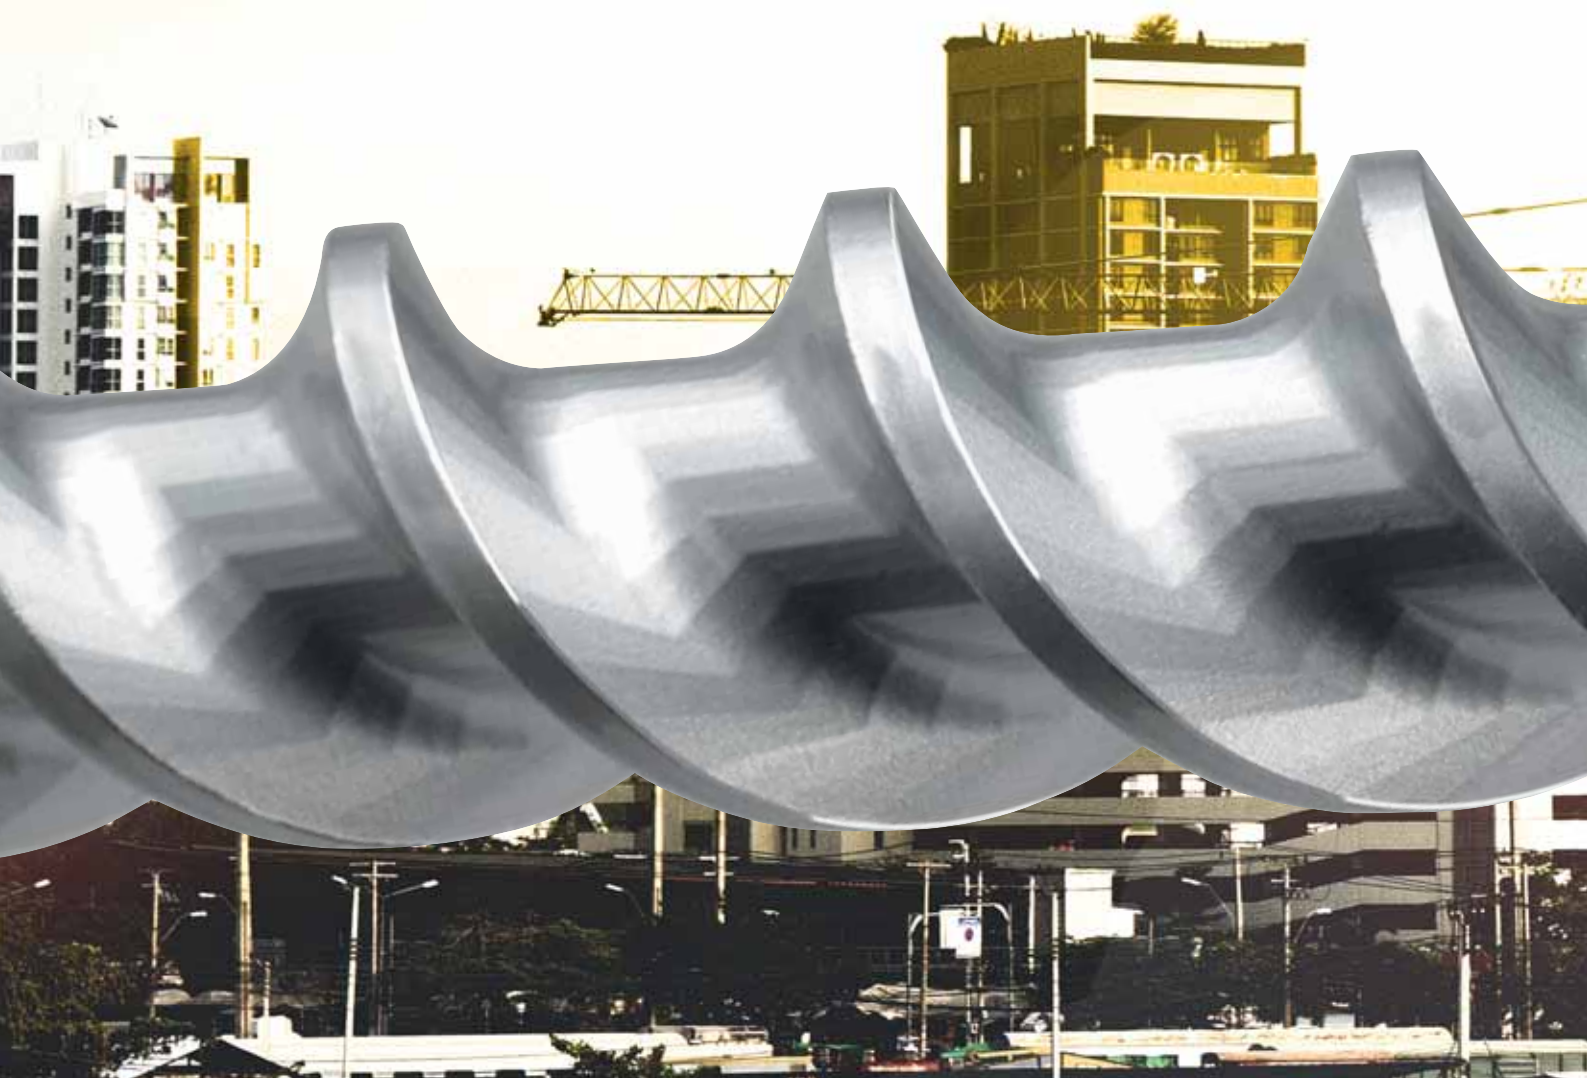

**DRILLS THROUGH  
OVERSIZED REBAR\***



**+ 1000 HOLES\***



\* Hand tests with 20 joules hammer drill


\* Tests on an automatic bench, 8,8 joules hammer drill, C50/60 concrete, 150 mm hole depth, 24 mm hole diameter



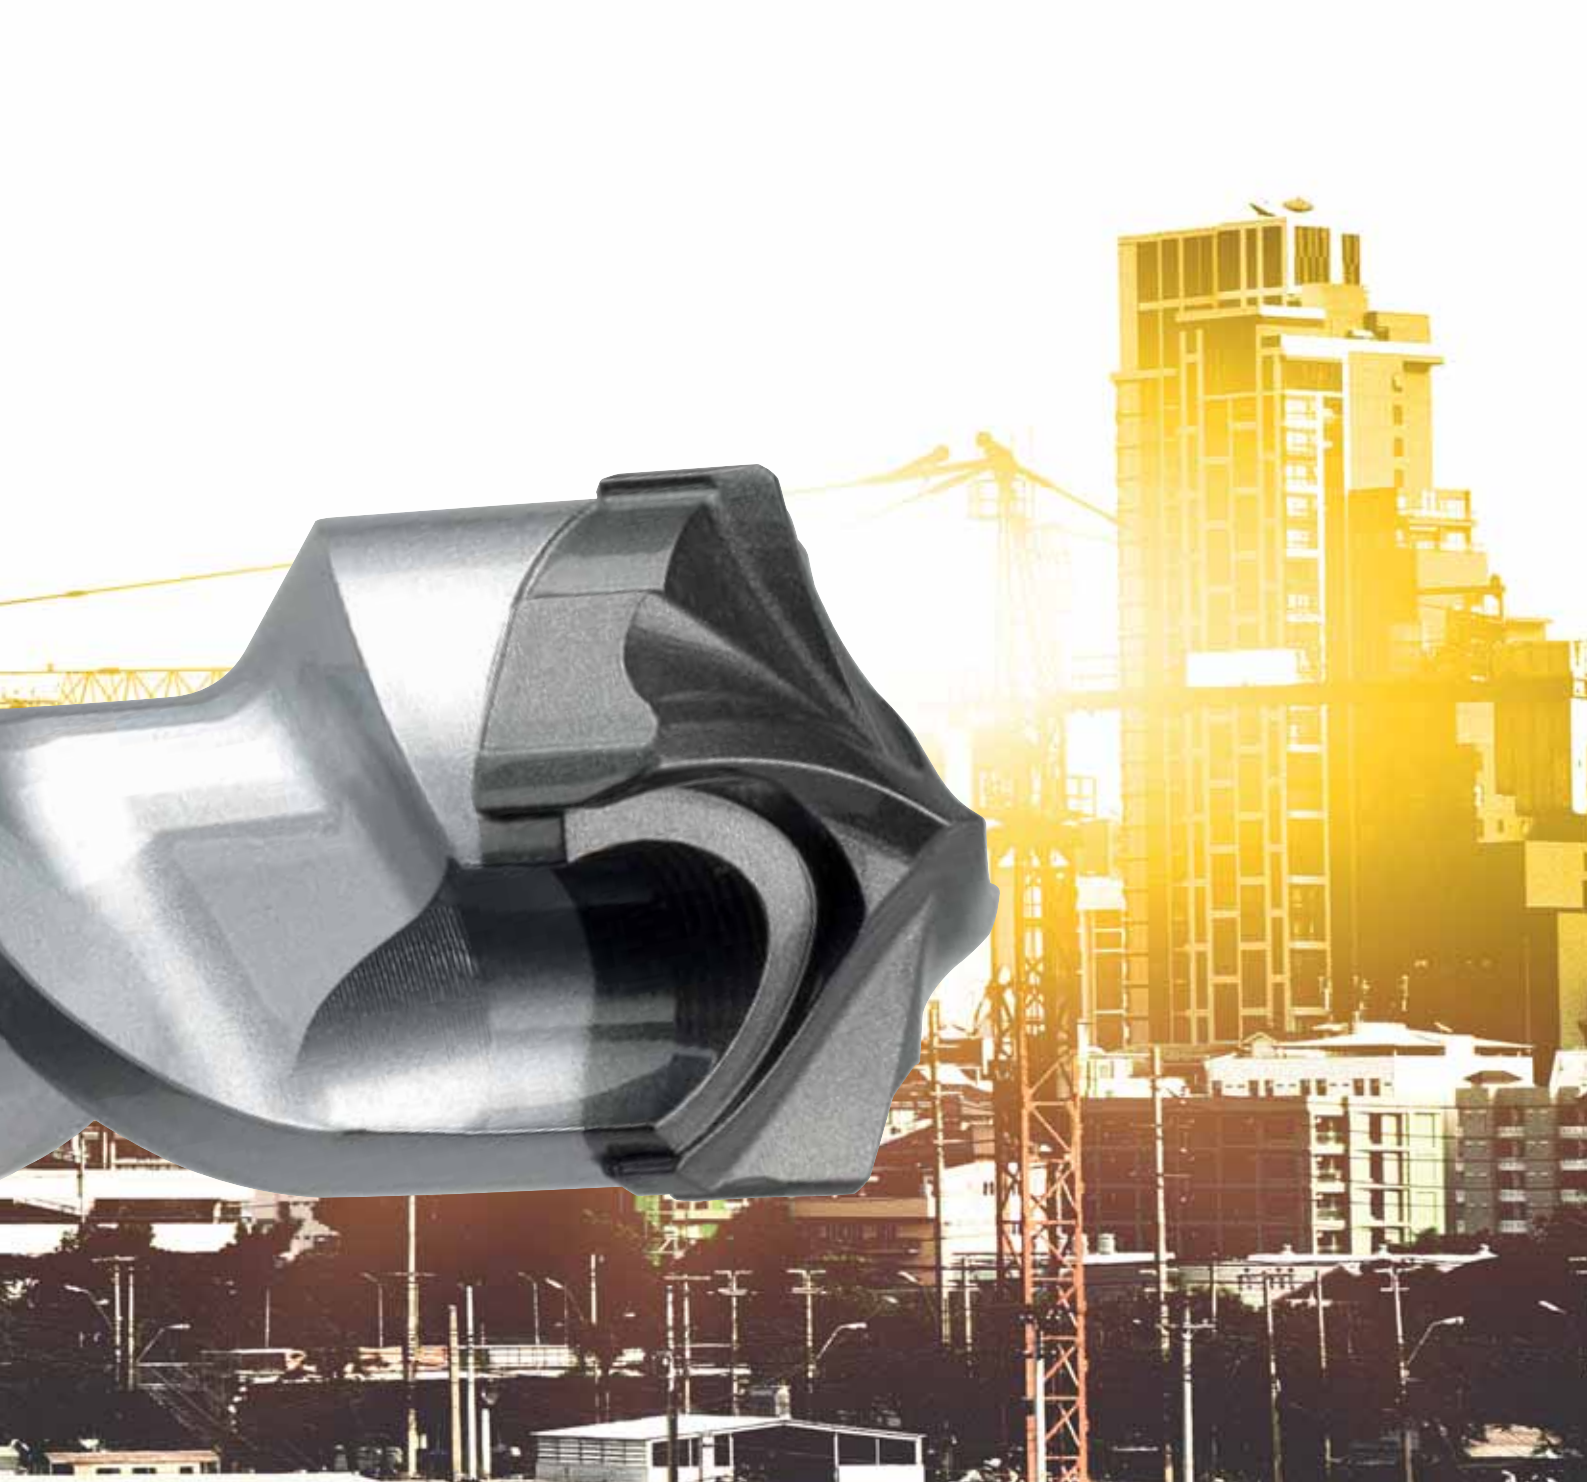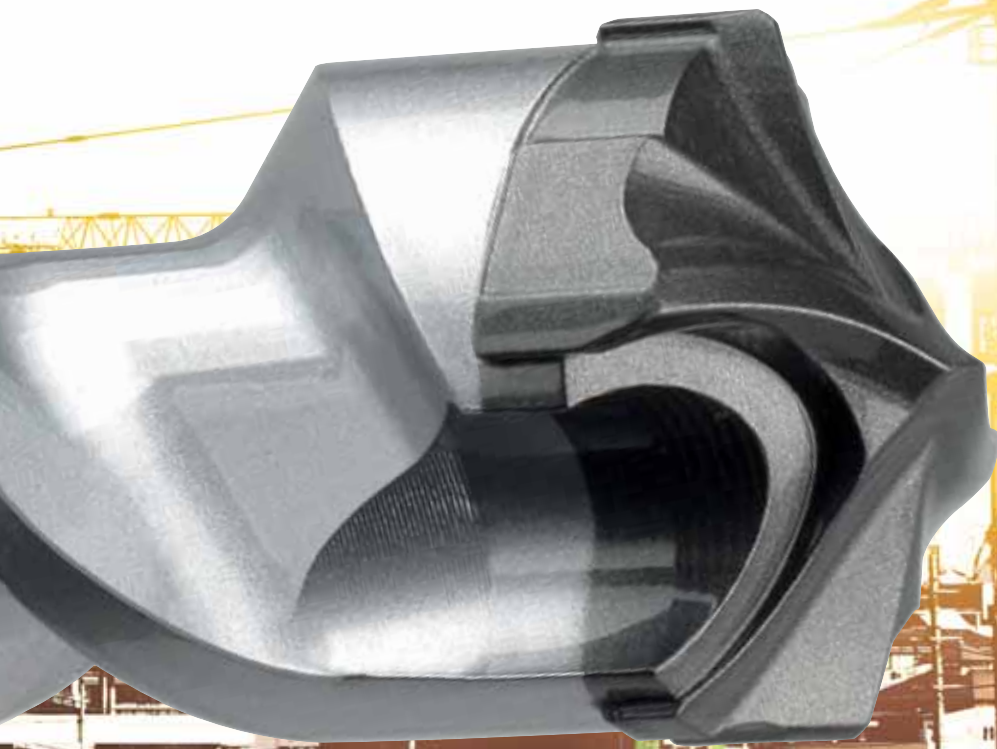

**HIGH SPEED DRILLING\***

**IDEAL FOR POWERFUL  
HAMMER DRILL**

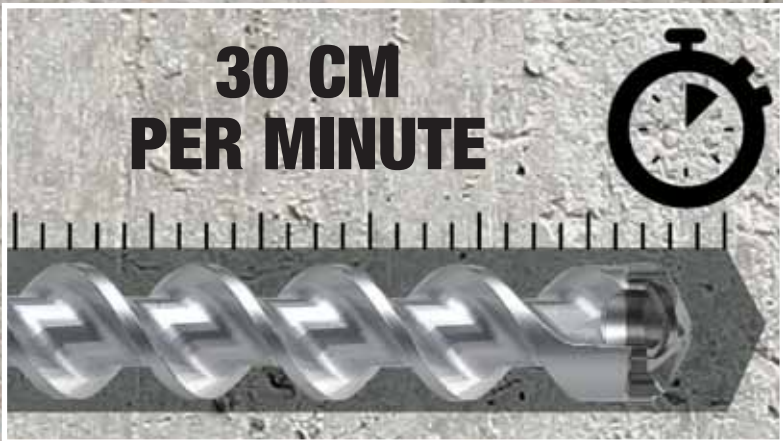

\* Tests on an automatic bench, C50/60 concrete

Ref.  
166

# Ultimax 646 **ULTIMAX 646**

Hammer drill bit 10 cutters compatible  
SDS Max

SDS Max drill bit with massive carbide head technology. High performance for drilling hard concrete and reinforced concrete.



Reinforced concrete, Concrete

**+**

## • 10 CUTTING EDGES TECHNOLOGY

### Features

- Massive carbide head.
- 10 cutters geometry.
- 6 lateral stabiliser.
- Elliptical 130° angle tip.
- Centering point.

### Benefits

- Fast drilling speed.
- High destruction power.
- Heat resistance.
- Low vibration.
- Longer lifespan.


### Applications

- Fixing steel rebar.
- Passage of pipes or electrical cable.

Shank Hammer drill



Compatible  
SDS-max

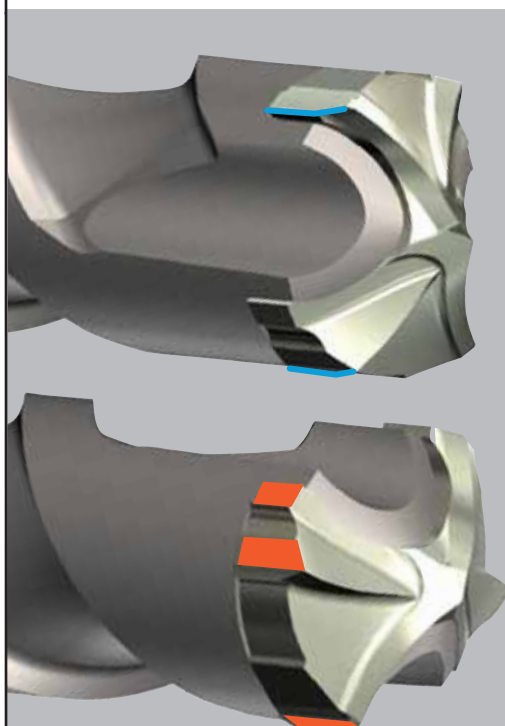

**6** FRONT CUTTERS 2 main ones  
2 secondary ones  
2 central ones

Heavy rebar cutting power and stronger chiseling effect thanks to optimal combination of concave and convex cutters. Elliptic 130° angle for better penetration. Aggressive center point.

**4** SIDE CUTTERS

Wear mark  
Guarantees concentricity and accurate dimensions.

**6** SIDE STABILISERS

Hammering efforts focus on the drilling axis. Optimum performance even with most powerful hammerdrills. Vibration control.

see our  
video on  
**YouTube**



| Ø                  | WL  | TL  | Ref.        | Gencod        | Qty | Ø                                       | WL   | TL   | Ref.        | Gencod        | Qty |
|--------------------|-----|-----|-------------|---------------|-----|---|------|------|-------------|---------------|-----|
| <b>L 200 x 340</b> |     |     |             |               |     | <b>26</b>                               | 550  | 690  | 166D26L0690 | 3336600005396 | 1   |
| *12                | 200 | 340 | 166D12L0340 | 3336600004818 | 1   | <b>28</b>                               | 550  | 690  | 166D28L0690 | 3336600005402 | 1   |
| 14                 | 200 | 340 | 166D14L0340 | 3336600004825 | 1   | <b>30</b>                               | 550  | 690  | 166D30L0690 | 3336600005426 | 1   |
| *15                | 200 | 340 | 166D15L0340 | 3336600004832 | 1   | <b>32</b>                               | 550  | 690  | 166D32L0690 | 3336600005433 | 1   |
| 16                 | 200 | 340 | 166D16L0340 | 3336600004849 | 1   | <b>35</b>                               | 550  | 690  | 166D35L0690 | 3336600005440 | 1   |
| 18                 | 200 | 340 | 166D18L0340 | 3336600004856 | 1   | <b>36</b>                               | 550  | 690  | 166D36L0690 | 3336600005457 | 1   |
| 20                 | 200 | 340 | 166D20L0340 | 3336600004870 | 1   | <b>38</b>                               | 550  | 690  | 166D38L0690 | 3336600028685 | 1   |
| 22                 | 200 | 340 | 166D22L0340 | 3336600004887 | 1   | <b>40</b>                               | 550  | 690  | 166D40L0690 | 3336600028692 | 1   |
| 24                 | 200 | 340 | 166D24L0340 | 3336600004894 | 1   | <b>42</b>                               | 550  | 690  | 166D42L0690 | 333660003389  | 1   |
| 25                 | 200 | 340 | 166D25L0340 | 3336600004900 | 1   | <b>45</b>                               | 550  | 690  | 166D45L0690 | 3336600063396 | 1   |
| 26                 | 200 | 340 | 166D26L0340 | 3336600004917 | 1   | **52                                    | 550  | 690  | 166D52L0690 | 3336600201330 | 1   |
| 28                 | 200 | 340 | 166D28L0340 | 3336600068261 | 1   | <b>L 780 x 920</b>                      |      |      |             |               |     |
| 30                 | 200 | 340 | 166D30L0340 | 3336600028760 | 1   | 16                                      | 780  | 920  | 166D16L0920 | 3336600005464 | 1   |
| 32                 | 200 | 340 | 166D32L0340 | 3336600068278 | 1   | 18                                      | 780  | 920  | 166D18L0920 | 3336600005471 | 1   |
| 35                 | 200 | 340 | 166D35L0340 | 3336600054707 | 1   | 20                                      | 780  | 920  | 166D20L0920 | 3336600005495 | 1   |
| 36                 | 200 | 340 | 166D36L0340 | 3336600063440 | 1   | 22                                      | 780  | 920  | 166D22L0920 | 3336600005501 | 1   |
| 38                 | 200 | 340 | 166D38L0340 | 3336600063457 | 1   | 24                                      | 780  | 920  | 166D24L0920 | 3336600005518 | 1   |
| 40                 | 200 | 340 | 166D40L0340 | 3336600063464 | 1   | 25                                      | 780  | 920  | 166D25L0920 | 3336600005525 | 1   |
| 42                 | 200 | 340 | 166D42L0340 | 3336600063402 | 1   | 26                                      | 780  | 920  | 166D26L0920 | 3336600005532 | 1   |
| 45                 | 200 | 340 | 166D45L0340 | 3336600063471 | 1   | 28                                      | 780  | 920  | 166D28L0920 | 3336600005549 | 1   |
| <b>L 400 x 540</b> |     |     |             |               |     | 30                                      | 780  | 920  | 166D30L0920 | 3336600005563 | 1   |
| *12                | 400 | 540 | 166D12L0540 | 3336600004924 | 1   | 32                                      | 780  | 920  | 166D32L0920 | 3336600005570 | 1   |
| 14                 | 400 | 540 | 166D14L0540 | 3336600004931 | 1   | 35                                      | 780  | 920  | 166D35L0920 | 3336600005587 | 1   |
| *15                | 400 | 540 | 166D15L0540 | 3336600004948 | 1   | 36                                      | 780  | 920  | 166D36L0920 | 3336600005594 | 1   |
| 16                 | 400 | 540 | 166D16L0540 | 3336600004955 | 1   | 40                                      | 780  | 920  | 166D40L0920 | 3336600005600 | 1   |
| 18                 | 400 | 540 | 166D18L0540 | 3336600005136 | 1   | 42                                      | 780  | 920  | 166D42L0920 | 3336600021464 | 1   |
| 20                 | 400 | 540 | 166D20L0540 | 3336600005150 | 1   | 45                                      | 780  | 920  | 166D45L0920 | 3336600024113 | 1   |
| 22                 | 400 | 540 | 166D22L0540 | 3336600005167 | 1   | <b>L 1160 x 1300</b>                    |      |      |             |               |     |
| 24                 | 400 | 540 | 166D24L0540 | 3336600005174 | 1   | 20                                      | 1160 | 1300 | 166D20L1300 | 3336600063297 | 1   |
| 25                 | 400 | 540 | 166D25L0540 | 3336600005181 | 1   | 22                                      | 1160 | 1300 | 166D22L1300 | 3336600063303 | 1   |
| 26                 | 400 | 540 | 166D26L0540 | 3336600005198 | 1   | 25                                      | 1160 | 1300 | 166D25L1300 | 3336600068193 | 1   |
| 28                 | 400 | 540 | 166D28L0540 | 3336600005204 | 1   | 28                                      | 1160 | 1300 | 166D28L1300 | 3336600063310 | 1   |
| 30                 | 400 | 540 | 166D30L0540 | 3336600005228 | 1   | 32                                      | 1160 | 1300 | 166D32L1300 | 3336600028746 | 1   |
| 32                 | 400 | 540 | 166D32L0540 | 3336600005235 | 1   | 35                                      | 1160 | 1300 | 166D35L1300 | 3336600063327 | 1   |
| 35                 | 400 | 540 | 166D35L0540 | 3336600005242 | 1   | 36                                      | 1160 | 1300 | 166D36L1300 | 3336600063334 | 1   |
| 36                 | 400 | 540 | 166D36L0540 | 3336600005259 | 1   | 42                                      | 1160 | 1300 | 166D42L1300 | 3336600063341 | 1   |
| 38                 | 400 | 540 | 166D38L0540 | 3336600023093 | 1   | **45                                    | 1160 | 1300 | 166D45L1300 | 3336600063358 | 1   |
| 40                 | 400 | 540 | 166D40L0540 | 3336600023109 | 1   | <b>L 1360 x 1500</b>                    |      |      |             |               |     |
| 42                 | 400 | 540 | 166D42L0540 | 3336600023116 | 1   | 20                                      | 1360 | 1500 | 166D20L1500 | 3336600024120 | 1   |
| 45                 | 400 | 540 | 166D45L0540 | 3336600063419 | 1   | 24                                      | 1360 | 1500 | 166D24L1500 | 3336600024137 | 1   |
| **52               | 400 | 540 | 166D52L0540 | 3336600201323 | 1   | 25                                      | 1360 | 1500 | 166D25L1500 | 3336600037625 | 1   |
| <b>L 550 x 690</b> |     |     |             |               |     | 28                                      | 1360 | 1500 | 166D28L1500 | 3336600024144 | 1   |
| 16                 | 550 | 690 | 166D16L0690 | 3336600005327 | 1   | 32                                      | 1360 | 1500 | 166D32L1500 | 3336600024151 | 1   |
| 18                 | 550 | 690 | 166D18L0690 | 3336600005334 | 1   | 36                                      | 1360 | 1500 | 166D36L1500 | 3336600024168 | 1   |
| 20                 | 550 | 690 | 166D20L0690 | 3336600005358 | 1   | 40                                      | 1360 | 1500 | 166D40L1500 | 3336600063365 | 1   |
| 22                 | 550 | 690 | 166D22L0690 | 3336600005365 | 1   | 42                                      | 1360 | 1500 | 166D42L1500 | 3336600063372 | 1   |
| 24                 | 550 | 690 | 166D24L0690 | 3336600005372 | 1   | **45                                    | 1360 | 1500 | 166D45L1500 | 3336600027091 | 1   |
| 25                 | 550 | 690 | 166D25L0690 | 3336600005389 | 1   | * 3 cutting edges<br>** 6 cutting edges |      |      |             |               |     |



Black plastic clip

Power recommendation machine / drill diameter.  
Using a machine not adapted to the diameter can break the drill bit.

| MACHINE Attachment       | Joule strike force | Weight in kg | DIAMETER |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------|--------------------|--------------|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|                          |                    |              | 12       | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 |
| SDS-max wired perforator | 8-9                | 6-7          |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                          | 12-13              | 8-9          |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                          | 19-20              | 11-12        |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

Optimal use
  Occasional use
  Not compatible



# DUST-FREE DRILL BIT

## **SPEEDUSTER 646**



### TARGET : DUST-FREE

SPEEDUSTER dust-free drill bit with the massive head system allows immediate dust extraction.  
 SPEEDUSTER drills faster and without any blocking, its lifetime is significantly longer.



### CLEANER WORKSITE



SPEEDUSTER drills and extracts dust in one step. Job is done faster. Indoor equipment is safe from dust and lasts longer.


### PROTECTION



In compliance with the new international dust exposure regulations, workers are now protected from dust. According to countries, the law establishes the value of exposure to quartz silica (breathable dust) at 0,1 mg / m3 for 8 working hours.


### FAST SPEED DRILLING

#### DRILLS TWICE FASTER

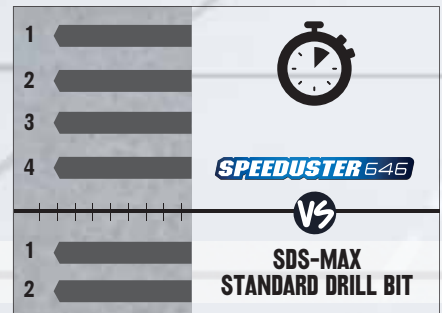

SPEEDUSTER drills 4 holes vs 2 compared to a standard SDS-Max drill bit.



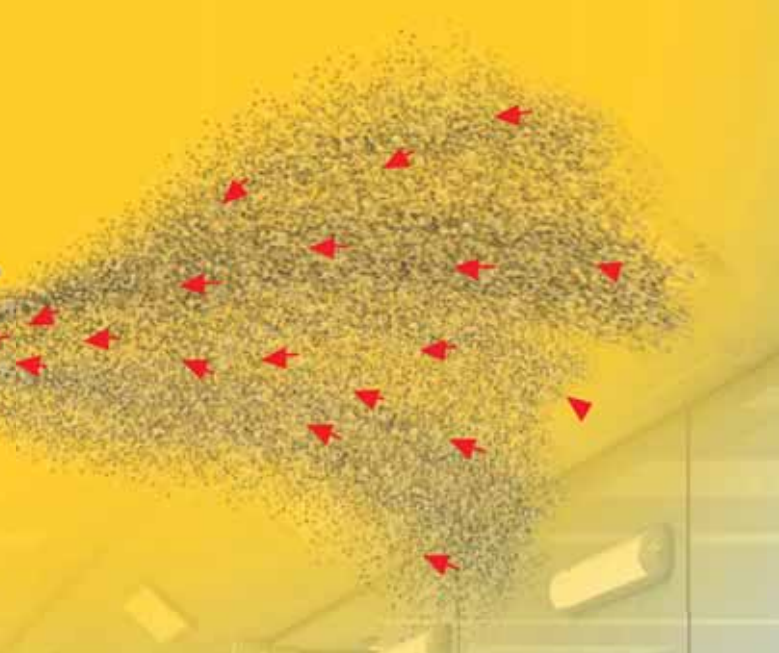

**new**

Compatible  
SDS-plus

**DRILLING COMPARISON**

**SDS-MAX STANDARD  
DRILL BIT**



**SPEEDUSTER 646**



**2,2 LBS OF DUST**




**DUST-FREE**



Drilling diameter 1-1/4", length 40" depth in C50/60 concrete

**EFFICIENCY**

**FASTENING IN 2 STEPS ONLY**

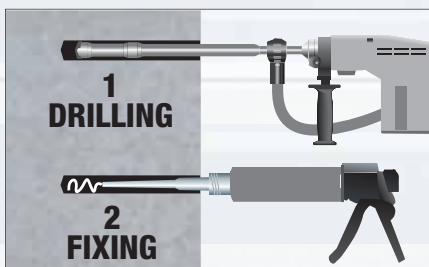

Holes drilling and cleaning are made in a single stage. Chemical fastening resistance is multiplied tenfold thanks to perfectly clean holes. There are a real time-saving and a better profitability of worksites.

Ref.  
114

# Speeduster **SPEEDUSTER**

Suction drill bit compatible SDS+

Speeduster SDS+ drill bit enables immediate and total dust removal. The suction system allows faster drilling time.



Reinforced concrete, Concrete, Granit, Stone, Brick

## • 2 IN 1 : DRILLING AND VACUUM

### Features

- Monobloc carbide tip 3 cutting edges.
- 3 suction holes.
- Connective sleeve.
- Centering point.


### Benefits

- Working without dust.
- Drilling and cleaning hole in one operation.
- Drilling concrete with rebar.
- Long life.

### Applications

- Fixing steel rebar.
- Clean rooms, hospitals, laboratories...

Shank Hammer drill



Compatible SDS-plus



Black plastic clip

| Ø                      | WL  | TL  | Ref.        | Gencod        | Qty |
|------------------------|-----|-----|-------------|---------------|-----|
| <b>3 cutting edges</b> |     |     |             |               |     |
| 12                     | 265 | 410 | 114D12L0410 | 3336600194175 | 1   |
| 14                     | 265 | 410 | 114D14L0410 | 3336600194182 | 1   |
| 16                     | 265 | 410 | 114D16L0410 | 3336600194199 | 1   |
| 18                     | 265 | 410 | 114D18L0410 | 3336600194205 | 1   |
| 20                     | 265 | 410 | 114D20L0410 | 3336600194212 | 1   |



see our video on YouTube



Ref.  
114DPLUS

## Sleeve spare part

Connecting sleeve for SDS+ speeduster drill bit.



Twistpack

| Ref.                        | Gencod        | Qty |
|-----------------------------|---------------|-----|
| <b>SDS-plus</b><br>114DPLUS | 3336600194229 | 1   |




Ref.  
161

# Speeduster 646 **SPEEDUSTER 646**

## Suction drill bit compatible SDS Max

Speeduster SDS Max drill bit enables immediate and total dust removal. The suction system allows faster drilling time.



### • 2 IN 1 : DRILLING AND VACUUM

#### Features

- 2 holes for suction dust.
- Centering point.
- Vacuum connector.
- Carbide head.

#### Benefits

- Working without dust.
- Drilling and cleaning hole in one operation.
- Drilling concrete with rebar.
- Long life.

#### Applications

- Fixing steel rebar.
- Clean rooms, hospitals, laboratories...



Reinforced concrete, Concrete, Granit, Stone, Brick

Shank Hammer drill



Compatible SDS-max



| Ø                      | WL  | TL  | Ref.        | Gencod        | Qty |
|------------------------|-----|-----|-------------|---------------|-----|
| <b>3 cutting edges</b> |     |     |             |               |     |
| 14                     | 400 | 610 | 161D14L0610 | 3336600192669 | 1   |
| 16                     | 400 | 610 | 161D16L0610 | 3336600192676 | 1   |
| 18                     | 400 | 610 | 161D18L0610 | 3336600192683 | 1   |
| 20                     | 400 | 610 | 161D20L0610 | 3336600192690 | 1   |



| Ø                       | WL  | TL  | Ref.        | Gencod        | Qty |
|-------------------------|-----|-----|-------------|---------------|-----|
| <b>10 cutting edges</b> |     |     |             |               |     |
| 22                      | 400 | 610 | 161D22L0610 | 3336600192706 | 1   |
| 25                      | 400 | 610 | 161D25L0610 | 3336600192713 | 1   |
| 28                      | 400 | 610 | 161D28L0610 | 3336600192720 | 1   |
| 30                      | 400 | 610 | 161D30L0610 | 3336600192737 | 1   |
| 32                      | 400 | 610 | 161D32L0610 | 3336600192744 | 1   |
| 35                      | 400 | 610 | 161D35L0610 | 3336600192751 | 1   |

see our video on **YouTube**



Ref.  
161DMAX

# Sleeve spare part

Connecting sleeve for SDS Max speedster drill bit.



| Ref.               | Gencod        | Qty |
|--------------------|---------------|-----|
| SDS-max<br>161DMAX | 3336600192768 | 1   |


## Power recommendation machine / drill diameter

Using a machine not adapted to the diameter can break the drill bit.

| Machine Attachment              | Batterie voltage | Joule strike force | Weight in kg | DIAMETER |    |    |    |    |    |    |    |    |    |    |    |  |
|---------------------------------|------------------|--------------------|--------------|----------|----|----|----|----|----|----|----|----|----|----|----|--|
|                                 |                  |                    |              | 12       | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 35 |  |
| SDS-max<br>Wired perforator     | -                | 8-9                | 6-7          |          |    |    |    |    |    |    |    |    |    |    |    |  |
|                                 | -                | 12-13              | 8-9          |          |    |    |    |    |    |    |    |    |    |    |    |  |
| SDS-plus<br>Wired perforator    | -                | 2,5-3,5            | 2,5-3,5      |          |    |    |    |    |    |    |    |    |    |    |    |  |
|                                 | -                | 3-3,5              | 3-4          |          |    |    |    |    |    |    |    |    |    |    |    |  |
|                                 | -                | 4-4,5              | 4,5-5        |          |    |    |    |    |    |    |    |    |    |    |    |  |
| SDS-plus<br>Cordless perforator | 18               | 2-3                | 3-4          |          |    |    |    |    |    |    |    |    |    |    |    |  |
|                                 | 36               | 2                  | 3            |          |    |    |    |    |    |    |    |    |    |    |    |  |
|                                 | 36               | 3-4                | 4-5          |          |    |    |    |    |    |    |    |    |    |    |    |  |

Optimal use
  Occasional use
  Not compatible



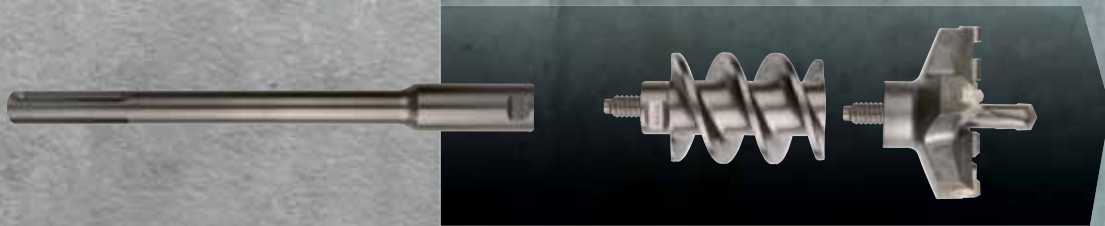



**1** Head with centering drill bit  
Ref : 373B

**2** Spiral with screw  
Ref : 372B

**3** Extension with coupling screw  
Ref : 371B

**4** Adapter compatible SDS-max  
Ref : 370B



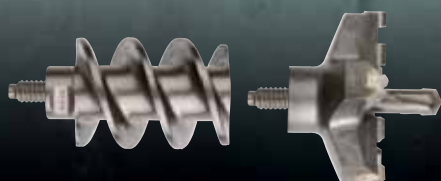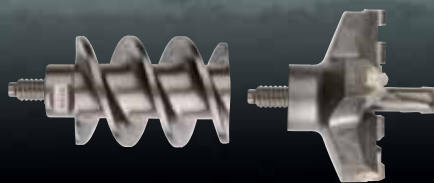

# MODULAR SYSTEM POWER-MAX

- Versatility and modularity.
- Big diameter.
- Deep drilling up to 1,7 m.

## Power-Max

Adjustable and upgradeable system for deep drilling more than 1m.

Adapts to all rotary hammer by changing only the adapter. Capacity to adapt head from Ø32 to 80 mm or carbide core bit from Ø30 to 125 mm.

Head with carbide tip and centering drill bit with 2 cutting edges.

### Advices

- Finish to assembly the tool with spanner gripping.
- Regularly lubricate the coupling screws and the threaded bores.
- Put the delivery spring on the femal part (blocking system).

Ref.  
373B

# Power Max head

## Compatible SDS-max



Carbide head with 4 cutting edges and centering drill bit for deep drilling, more than 1m.  
Capacity to adapt head from  $\varnothing 32$  to 80mm.



- MODULARITY
- DEEP DRILLING

### Features

- Adjustable and upgradable system for deep drilling more than 1m.
- Head with carbide tip and centering drill bit with 2 cutting edges.

### Benefits

- Versatility and modularity.
- Very strong resistance.
- Specially adapted for the drilling of important lengths.

### Advices

- Finish tightening the tools with a flat spanner.
- Grease the coupling screws and threaded bores regularly.
- Supplied with spring to be inserted in the female part (locking system).



Concrete, Stone, Breeze block

Shank Hammer drill



Compatible  
SDS-max



Twistpack

| $\varnothing$ | TL | Ref.    | Gencod        | Qty |
|---------------|----|---------|---------------|-----|
| 32            | 43 | 373BD32 | 3336600154094 | 1   |
| 44            | 43 | 373BD44 | 3336600146273 | 1   |
| 52            | 43 | 373BD52 | 3336600143456 | 1   |
| 60            | 43 | 373BD60 | 3336600143463 | 1   |
| 66            | 43 | 373BD66 | 3336600143470 | 1   |
| 80            | 43 | 373BD80 | 3336600143487 | 1   |



Ref.  
**372B**

## Power max spiral

Adapted for Power Max head 44 to 52mm and 60 to 80 mm.



Twistpack



| For head Ø | Ø  | TL  | Ref.    | Gencod        | Qty |
|------------|----|-----|---------|---------------|-----|
| 44-52      | 40 | 180 | 372BD40 | 3336600143432 | 1   |
| 60-80      | 55 | 90  | 372BD55 | 3336600143449 | 1   |

Ref.  
**371B**

## Power max extension

Power max extension 280mm include coupling screw and spring.



Twistpack



| Ø  | TL  | Ref.      | Gencod        | Qty |
|----|-----|-----------|---------------|-----|
| 14 | 280 | 371BD0280 | 3336600143425 | 1   |

Ref.  
**370B**

## Power max adapter SDSMax

Length 250mm, 450mm ou 850mm.



Black plastic clip



| Ø  | TL  | Ref.      | Gencod        | Qty |
|----|-----|-----------|---------------|-----|
| 14 | 250 | 370BD0250 | 3336600143395 | 1   |
| 14 | 450 | 370BD0450 | 3336600143401 | 1   |
| 14 | 850 | 370BD0850 | 3336600143418 | 1   |

Ref.  
**374B**

## Power max head centering drill bit

Adapted on all the Power Max head.



Quality plastic pouch



| Ø  | TL | Ref. | Gencod        | Qty |
|----|----|------|---------------|-----|
| 12 | 90 | 374B | 3336600143494 | 1   |

Ref.  
375B

## Powermax coupling screw+spring

Allow to assemble Power Max head, spiral and extension together.



| Ø  | TL | Ref. | Gencod        | Qty |
|----|----|------|---------------|-----|
| 14 | 62 | 375B | 3336600143500 | 1   |

Ref.  
376B


## Power max adapter for core bit

To adapt core bit on Power Max system..



| Ø  | TL | Ref. | Gencod        | Qty |
|----|----|------|---------------|-----|
| 26 | 90 | 376B | 3336600143517 | 1   |

### Sets composition

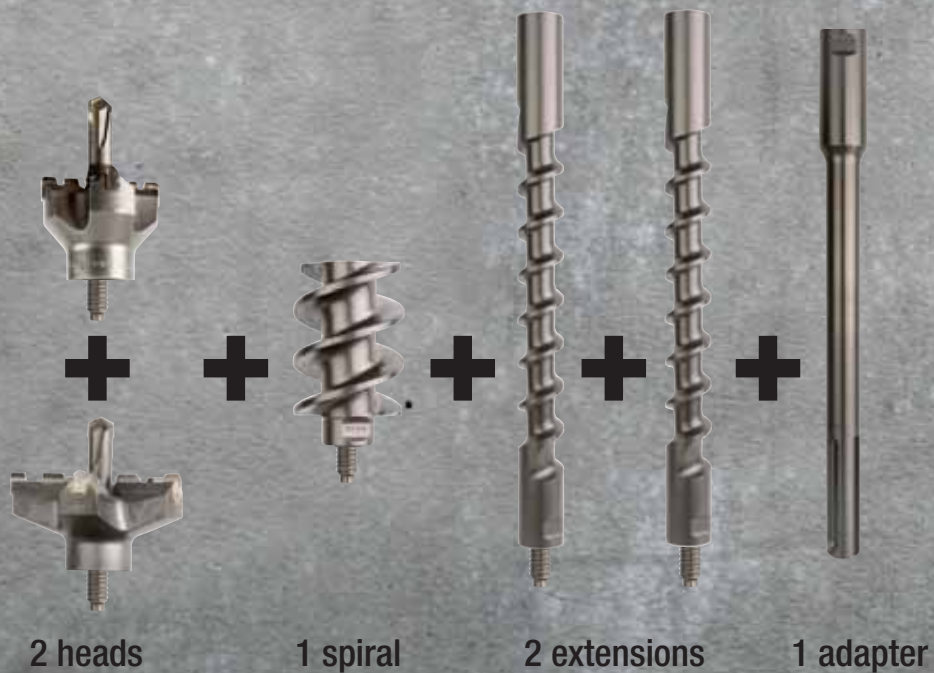



Ref.  
**093C**

## Power max set

Power max set ready to use with 2 heads 32 & 44 mm.



| Ø     | TL       | Ref. | Gencod        | Qty |
|-------|----------|------|---------------|-----|
| 32-44 | 910-1000 | 093C | 3336600186866 | 1   |

Ref.  
**090C**

## Power max set

Power max set ready to use with 2 heads 44 & 52 mm.



| Ø     | TL   | Ref. | Gencod        | Qty |
|-------|------|------|---------------|-----|
| 44-52 | 1000 | 090C | 3336600174580 | 1   |

Ref.  
**091C**

## Power max set

Power max set ready to use with 2 heads 52 & 66 mm.



| Ø     | TL       | Ref. | Gencod        | Qty |
|-------|----------|------|---------------|-----|
| 52-66 | 910-1000 | 091C | 3336600186842 | 1   |

Ref.  
**092C**

## Power max set

Power max set ready to use with 2 heads 52 & 80 mm.



| Ø     | TL       | Ref. | Gencod        | Qty |
|-------|----------|------|---------------|-----|
| 52-80 | 910-1000 | 092C | 3336600186859 | 1   |

Ref.  
165

# Crosser



Multi cutting edges drill bit  
compatible SDS Max

Deep hole drilling from 45 mm up to 80 mm diameter.



- DEEP DRILLING
- LARGE DIAMETERS

**Features**

- Centering carbide tipped drill.
- Carbide tip in the center and periphery.
- SDS Max shank.

**Benefits**

- High resistance and lifetime.
- Drilling large diameters.
- Destructive power.

**Applications**

- Ideal for deep or through drilling.



Concrete, Stone, Brick

Shank Hammer drill



Compatible  
SDS-max



Twistpack

| Number of tips     | Ø  | WL  | TL  | Ref.        | Gencod        | Qty |
|--------------------|----|-----|-----|-------------|---------------|-----|
| <b>L 450 x 590</b> |    |     |     |             |               |     |
| 4                  | 45 | 450 | 590 | 165D45L0590 | 3336600098848 | 1   |
| 6                  | 55 | 450 | 590 | 165D55L0590 | 3336600005297 | 1   |
| 6                  | 65 | 450 | 590 | 165D65L0590 | 3336600005303 | 1   |
| 10                 | 80 | 450 | 590 | 165D80L0590 | 3336600005310 | 1   |
| <b>L 780 x 990</b> |    |     |     |             |               |     |
| 4                  | 45 | 780 | 990 | 165D45L0990 | 3336600005617 | 1   |
| 6                  | 55 | 780 | 990 | 165D55L0990 | 3336600005624 | 1   |
| 6                  | 65 | 780 | 990 | 165D65L0990 | 3336600005631 | 1   |
| 10                 | 80 | 780 | 990 | 165D80L0990 | 3336600005648 | 1   |



Ref.  
138B

## Adapter compatible SDS-max SDS-plus

SDS-max shank SDS-plus chuck.



Twistpack



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 138B | 3336600015661 | 1   |



Ref.  
143B

## Adapter SDS-plus thread 1/2" male

Adapter SDS-plus shank thread 1/2" male, to use with Diager chuck 121K.



Black plastic clip



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 143B | 3336600063990 | 1   |



Ref.  
177B

## Adapter SDS-max thread 1/2" male

Adapter SDS-max shank thread 1/2" male to use with Diager Chuck 121K.



Plastic pouch




| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 177B | 3336600064010 | 1   |



Ref.  
121K

# Chuck

Keyless chuck thread 1/2"



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 121K | 3336600144309 | 1   |

Ref.  
124K

# Chuck

Keyless chuck thread M14



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 124K | 3336600146938 | 1   |







# DEMOLITION RANGE



## Flat chisel

P. 58

To remove material in larger quantities.

## Angled bolster

For removing material in larger quantities with an angled working face for more ergonomic work.

P. 59

## Brick chasing chisel

P. 60

For work in sandstone, brick and stone. Ideal for varying the depth of the trench and for digging places for power outlets without changing tools.

## Concrete chasing chisel

P. 60

To make thick trench on concrete.

## Bush hammer head

P. 59

- 16 carbide teeth.
- Monobloc.








# Helical pointed

4 ANTI-LOCK SIDES

HELICAL WORKING PROFIL

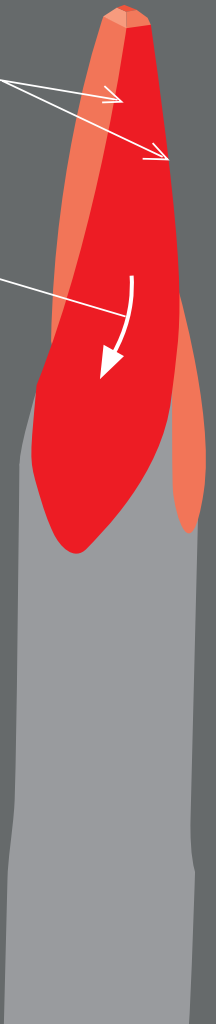

● EFFORTLESS DRILLING

Due to its helical head, the pointed chisel penetrates and explodes easily more materials. The user's efforts are minimised in comparison to a classic head form. User comfort is improved.

● ANTI-LOCK

The new helical working head works in half rotation with constant pressure on its 4 cutting edges. Guided by its specific geometry with air and dust extraction during drilling, it doesn't get stuck into materials.

● 100% POWERFUL

High temperature heat treatment under controlled atmospheric conditions provides maximum strength which concentrates all the hammer power for a real chiseling performance.

## Toothed chisel

P. 59

To unjoint, remove without damaging bricks or masonry stones, tiles and layers of plaster.



## Jointed chisel

To put out the junctions mortar of bricks,...

P. 60



## Storage bin

For storing demolition tools, delivered in bulk. Removal dividers delivered with the display. Arranged on shelf, bottom of sales shelf. Magnetic bottom for optimal stability. Ref. M00197



Features

BIN WITH REMOVAL DIVIDER  
(WIDTH 500MM X DEPTH 500MM)

Ref.

M00197

Gencod

3336609008909

Ref.  
322

## Helical pointed chisel compatible SDS-plus

Chisel with helical point which facilitates the destruction of materials, avoids blockages and allows a better efficiency



Black plastic clip

| Ø                          | TL  | Ref.        | Gencod        | Qty |
|----------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-plus</b> |     |             |               |     |
| 12                         | 250 | 322D12L0250 | 3336600012820 | 1   |
| 14                         | 250 | 322D14L0250 | 3336600022171 | 1   |



Ref.  
342

## Helical pointed chisel compatible SDS-max

Chisel with helical point which facilitates the destruction of materials, avoids blockages and allows a better efficiency



Black plastic clip

| Ø                         | TL  | Ref.        | Gencod        | Qty |
|---------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |             |               |     |
| 18                        | 280 | 342D18L0280 | 3336600063488 | 1   |
| 18                        | 400 | 342D18L0400 | 3336600061521 | 1   |
| 18                        | 600 | 342D18L0600 | 3336600063495 | 1   |



Ref.  
318

## Flat chisel compatible SDS-plus

High resistance flat chisel for all demolition work.



Black plastic clip

| Width                      | TL  | Ref.        | Gencod        | Qty |
|----------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-plus</b> |     |             |               |     |
| 20                         | 250 | 318L20L0250 | 3336600063518 | 1   |
| 40                         | 200 | 318L40L0200 | 3336600063525 | 1   |



Ref.  
343

## Flat chisel compatible SDS-max

High resistance flat chisel for all demolition work.



Black plastic clip

| Width                     | TL  | Ref.         | Gencod        | Qty |
|---------------------------|-----|--------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |              |               |     |
| 24                        | 280 | 343L24L0280  | 3336600063549 | 1   |
| 24                        | 400 | 343L24L0400  | 3336600061514 | 1   |
| 24                        | 600 | 343L24L0600  | 3336600075368 | 1   |
| 50                        | 360 | 343L50L0360  | 3336600063556 | 1   |
| 80                        | 300 | 343L80L0300  | 3336600063563 | 1   |
| 115                       | 350 | 343L115L0350 | 3336600063570 | 1   |





Ref.  
363

## Bush-hammer compatible SDS-max

Bush-hammer monobloc head with 16 carbide teeth



Twistpack



| Width                     | Lt  | Ref.        | Gencod        | Qty |
|---------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |             |               |     |
| 45                        | 240 | 363D16L0045 | 3336600063723 | 1   |



Ref.  
348

## Elbowed chisel compatible SDS-plus



Black plastic clip



| Width                      | TL  | Ref.        | Gencod        | Qty |
|----------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-plus</b> |     |             |               |     |
| 40                         | 200 | 348L40L0200 | 3336600063648 | 1   |
| 80                         | 200 | 348L80L0200 | 3336600192430 | 1   |



Ref.  
349

## Elbowed chisel compatible SDS-max



Black plastic clip



| Width                     | TL  | Ref.        | Gencod        | Qty |
|---------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |             |               |     |
| 50                        | 300 | 349L50L0300 | 3336600063655 | 1   |
| 80                        | 300 | 349L80L0300 | 3336600185401 | 1   |



Ref.  
361

## Carbide tipped chisel compatible SDS-max



Black plastic clip



| Width                     | TL  | Ref.        | Gencod        | Qty |
|---------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |             |               |     |
| 38                        | 280 | 361L40L0280 | 3336600063662 | 1   |



Ref.  
329

Jointed chisel compatible SDS-max



| Thickness                 | TL  | Ref.        | Gencod        | Qty |
|---------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |             |               |     |
| 10                        | 300 | 329L10L0300 | 3336600063679 | 1   |

Black plastic clip



Ref.  
311

Chasing chisel compatible SDS-plus



| Thickness                  | TL  | Ref.        | Gencod        | Qty |
|----------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-plus</b> |     |             |               |     |
| 22                         | 250 | 311L22L0250 | 3336600063686 | 1   |

Black plastic clip



Ref.  
312

Chasing chisel compatible SDS-max



| Width                     | TL  | Ref.        | Gencod        | Qty |
|---------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |             |               |     |
| 26                        | 300 | 312L26L0300 | 3336600063693 | 1   |

Black plastic clip



Ref.  
314

Brick chasing chisel compatible SDS-max



| Thickness                 | TL  | Ref.        | Gencod        | Qty |
|---------------------------|-----|-------------|---------------|-----|
| <b>Compatible SDS-max</b> |     |             |               |     |
| 32x23                     | 300 | 314L32L0300 | 3336600063709 | 1   |
| 35x36                     | 380 | 314L35L0380 | 3336600063716 | 1   |

Black plastic clip





ALL  
SETS  
PAGES 120-121



**111C**  
Compatible SDS-plus Ref. 111C



**315C**  
Compatible SDS-max Ref. 315C

# Hammers drills & attachments compatibility

|                |                             | ATTACHMENT |         |
|----------------|-----------------------------|------------|---------|
|                |                             | SDS-plus   | SDS-max |
| <b>BOSCH®</b>  | HAMMER DRILL compatible     |            |         |
|                | GBH 11 DE                   |            |         |
|                | GBH 2-20 D                  |            |         |
|                | GBH 2-24 D / DF             |            |         |
|                | GBH 2-28 DFV / DV           |            |         |
|                | GBH 3-28 DFR / DRE          |            |         |
|                | GBH 36 VF-LI / V-LI /Compac |            |         |
|                | GBH 4-32 DFR                |            |         |
|                | GBH 5-38 D                  |            |         |
|                | GBH 5-40 DCE                |            |         |
|                | GBH 7-46 DE                 |            |         |
|                | GB H 8-45 DV                |            |         |
|                | GBH18V-LI                   |            |         |
|                | GSH 11 E / VC               |            |         |
|                | GSH 3 E                     |            |         |
| GSH 388        |                             |            |         |
| GSH 5 CE       |                             |            |         |
| <b>DEWALT®</b> | D25012K                     |            |         |
|                | D25013C / K                 |            |         |
|                | D25123K                     |            |         |
|                | D25124K                     |            |         |
|                | D25223K                     |            |         |
|                | D25323K                     |            |         |
|                | D25324K                     |            |         |
|                | D25325K                     |            |         |
|                | D25330K                     |            |         |
|                | D25404K                     |            |         |
|                | D25405K                     |            |         |
|                | D25501K                     |            |         |
|                | D25601K                     |            |         |
|                | D25712K                     |            |         |
|                | D25762K                     |            |         |
|                | D25831K                     |            |         |
|                | D25870K                     |            |         |
|                | D25899K                     |            |         |
|                | D25901K                     |            |         |
|                | DC212KA                     |            |         |
| DC213KB / KL   |                             |            |         |
| DC222KA        |                             |            |         |
| DC223KA        |                             |            |         |
| DC224KA        |                             |            |         |
| DC234KL        |                             |            |         |
| DC235KL        |                             |            |         |
| <b>HILTI®</b>  | TE 1                        |            |         |
|                | TE 2-A22 / M / S            |            |         |
|                | TE 16                       |            |         |
|                | TE 22                       |            |         |
|                | TE 3000-AVR                 |            |         |
|                | TE 300-AVR                  |            |         |
|                | TE 30-A36 / C-AVR / M-AVR   |            |         |
|                | TE 30-C-AVR / TE 30-M-AVR   |            |         |
|                | TE 40-AVR                   |            |         |
|                | TE 42                       |            |         |
|                | TE 4-A22                    |            |         |
|                | TE 5                        |            |         |
|                | TE 500-AVR                  |            |         |
|                | TE 50-AVR                   |            |         |
|                | TE 52                       |            |         |
|                | TE 54                       |            |         |
|                | TE 55                       |            |         |
|                | TE 56                       |            |         |
|                | TE 60-ATC                   |            |         |
|                | TE 60                       |            |         |
| TE 6-A36-AVR   |                             |            |         |
| TE 7           |                             |            |         |
| TE 72          |                             |            |         |
| TE 74          |                             |            |         |
| TE 75          |                             |            |         |
| TE 76          |                             |            |         |
| TE 700-AVR     |                             |            |         |
| TE 70-ATC      |                             |            |         |
| TE 7-C         |                             |            |         |
| TE 805         |                             |            |         |
| TE 80-ATC AVR  |                             |            |         |
| TE 92          |                             |            |         |

\*liste non exhaustive

Compatible


|   |                               | ATTACHMENT |         |
|---|-------------------------------|------------|---------|
|   |                               | SDS-plus   | SDS-max |
| <b>HITACHI®/HICOKI®</b>                     | HAMMER DRILL compatible       |            |         |
|   | DH22PH                        |            |         |
|   | DH24 PB3 / PC / PC3 / PM      |            |         |
|   | DH25PV                        |            |         |
|   | DH28PC / PD                   |            |         |
|   | DH30PC2                       |            |         |
|   | DH38MS                        |            |         |
|   | DH40 MRY                      |            |         |
|   | DH45MR                        |            |         |
|   | DH50 MRY                      |            |         |
| <b>MAKITA®</b>                              | DH50SBK                       |            |         |
|   | H45MRY                        |            |         |
|   | H60MR                         |            |         |
|   | BHR162RFE                     |            |         |
|   | BHR202RFE / 202Z              |            |         |
|   | BHR243RFE / 243RFEV / 243RFEJ |            |         |
|   | BHR261TDP1                    |            |         |
|   | HK1820 / 1820L                |            |         |
|   | HM0870C                       |            |         |
|   | HM0871C                       |            |         |
|   | HM1111C                       |            |         |
|   | HM1203C                       |            |         |
|   | HM1213C                       |            |         |
|   | HM1214C                       |            |         |
|   | HR1830                        |            |         |
|   | HR2230                        |            |         |
|   | HR2300X9                      |            |         |
|   | HR2310TSP1                    |            |         |
|   | HR2432                        |            |         |
|   | HR2460 / 2460F                |            |         |
| HR2470 / 2470F / 2470FT / 2470T-1 / 2470TX1 |                               |            |         |
| HR2600X9                                    |                               |            |         |
| HR2610TX4                                   |                               |            |         |
| HR2611FTX4                                  |                               |            |         |
| HR2811FT                                    |                               |            |         |
| HR3200C                                     |                               |            |         |
| HR3210FCT                                   |                               |            |         |
| HR3541FCX                                   |                               |            |         |
| HR4001C                                     |                               |            |         |
| HR4010C                                     |                               |            |         |
| HR4011C                                     |                               |            |         |
| HR4501C                                     |                               |            |         |
| HR4510C                                     |                               |            |         |
| HR4511C                                     |                               |            |         |
| HR5201C                                     |                               |            |         |
| HR5210C                                     |                               |            |         |
| HR5211C                                     |                               |            |         |
| <b>MILWAUKEE®</b>                           | 545 S                         |            |         |
|   | 750 S                         |            |         |
|   | 900 S                         |            |         |
|   | 950 S                         |            |         |
|   | PCE 3                         |            |         |
|   | PFH 26                        |            |         |
|   | PH 26                         |            |         |
|   | PH 28 / 28 X                  |            |         |
|   | PLH 20                        |            |         |
|   | PLH 26 E                      |            |         |
| <b>SPIT®</b>                                | PLH 30 E / 30 XE              |            |         |
|   | PLH 32 XE                     |            |         |
|   | 321                           |            |         |
|   | 322                           |            |         |
|   | 323                           |            |         |
|   | 330                           |            |         |
|   | 332                           |            |         |
|   | 343                           |            |         |
|   | 353                           |            |         |
|   | 372                           |            |         |
| 390   |                               |            |         |
| 431   |                               |            |         |
| 453   |                               |            |         |
| 490   |                               |            |         |
| 328EVO+                                     |                               |            |         |
| 329C  |                               |            |         |

\*liste non exhaustive


Compatible



**Hexagonal 19 mm + retaining groove (ref.310, 347)**

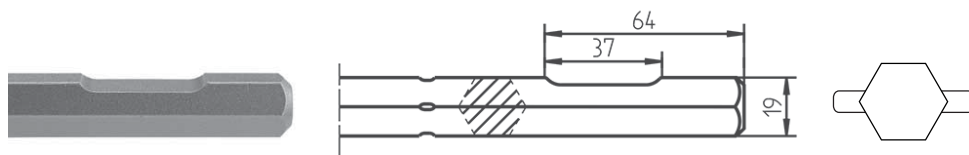

**Hexagonal 19 mm + cylindrical tip Ø16,5x35 mm (ref.324)**

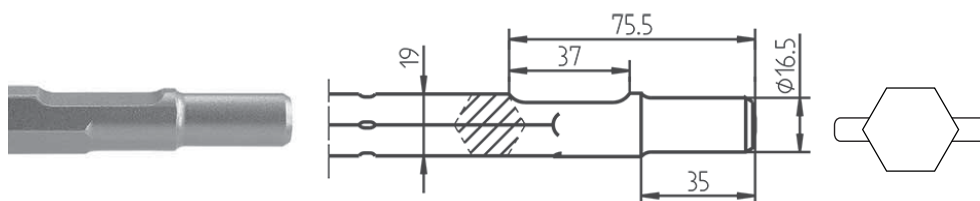

**Hexagonal 22 mm + 6 grooves (TE-S) (ref.355, 359)**






# DEMOLITION RANGE ELECTRIC BREAKER


Pointed chisels, Flat chisels  
and shovel chisels




**Hexagonal 28 mm + flat (ref.341, 354)**

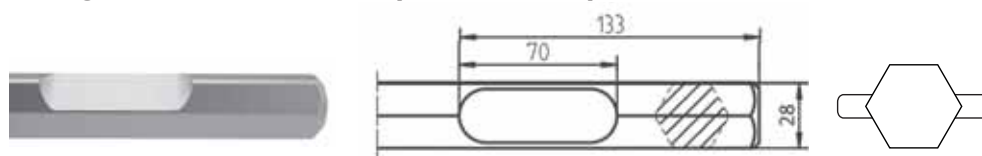

**Hexagonal 28 mm + collar (ref.321H, 351H, 373H)**

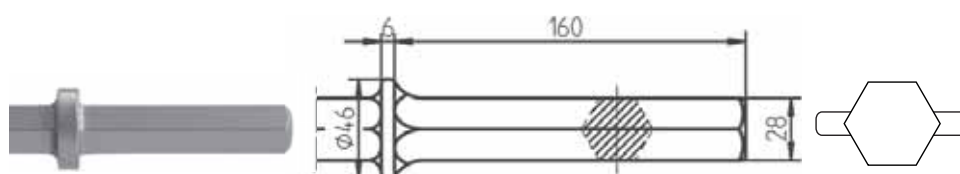

**Hexagonal 30 mm + cylindrical tip  $\phi 24 \times 55$  mm (ref.393, 394)**

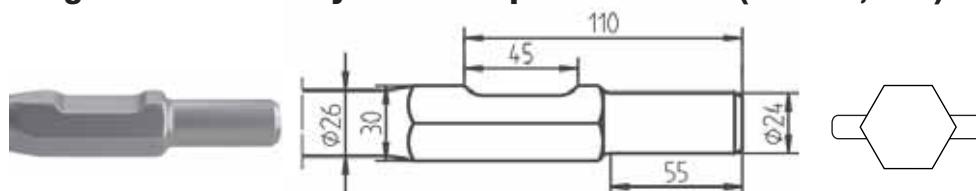

# Electric breaker & attachments compatibility

| ELECTRIC BREAKER        | ATTACHMENT                |   |                                     |                           |   |                             |
|-------------------------|---------------------------|---|-------------------------------------|---------------------------|---|-----------------------------|
|                         | Hexagonal 19 mm<br>+ flat | Hexagonal 19 mm<br>+ cylindrical tip Ø 16.5x35 mm | Hexagonal 22 mm<br>+ grooves (TE-S) | Hexagonal 28 mm<br>+ flat | Hexagonal 30 mm<br>+ cylindrical tip Ø 24x55 mm | Hexagonal 28 mm<br>+ collar |
| <b>ATLAS COPCO</b>      |                           |   |                                     |                           |   |                             |
| PB14D                   |                           |   |                                     |                           |   |                             |
| PB10H                   |                           |   |                                     |                           |   |                             |
| PH11H                   |                           |   |                                     |                           |   |                             |
| PH5H                    |                           |   |                                     |                           |   |                             |
| PHE50H                  |                           |   |                                     |                           |   |                             |
| PHE5H                   |                           |   |                                     |                           |   |                             |
| PHE6H                   |                           |   |                                     |                           |   |                             |
| <b>BOSCH</b>            |                           |   |                                     |                           |   |                             |
| HSH10 (12312)           |                           |   |                                     |                           |   |                             |
| USH10 (11305)           |                           |   |                                     |                           |   |                             |
| 45DE (11214)            |                           |   |                                     |                           |   |                             |
| UBH12-50 (11209)        |                           |   |                                     |                           |   |                             |
| UBH6-35                 |                           |   |                                     |                           |   |                             |
| UBH6-35D                |                           |   |                                     |                           |   |                             |
| USH6                    |                           |   |                                     |                           |   |                             |
| GSH16-28                |                           |   |                                     |                           |   |                             |
| GSH27                   |                           |   |                                     |                           |   |                             |
| GSH27VC                 |                           |   |                                     |                           |   |                             |
| HSH28 (12314)           |                           |   |                                     |                           |   |                             |
| USH27 (11304)           |                           |   |                                     |                           |   |                             |
| GSH16-30                |                           |   |                                     |                           |   |                             |
| <b>CASALS</b>           |                           |   |                                     |                           |   |                             |
| Tornado                 |                           |   |                                     |                           |   |                             |
| <b>DEWALT</b>           |                           |   |                                     |                           |   |                             |
| D25940K                 |                           |   |                                     |                           |   |                             |
| D25941K                 |                           |   |                                     |                           |   |                             |
| DW558K                  |                           |   |                                     |                           |   |                             |
| D25980                  |                           |   |                                     |                           |   |                             |
| <b>ELU</b>              |                           |   |                                     |                           |   |                             |
| SH60K                   |                           |   |                                     |                           |   |                             |
| <b>HILTI</b>            |                           |   |                                     |                           |   |                             |
| TE805                   |                           |   |                                     |                           |   |                             |
| TE905                   |                           |   |                                     |                           |   |                             |
| TE905AVR                |                           |   |                                     |                           |   |                             |
| TE1000AVR               |                           |   |                                     |                           |   |                             |
| TE1500AVR               |                           |   |                                     |                           |   |                             |
| TE2000                  |                           |   |                                     |                           |   |                             |
| TE3000                  |                           |   |                                     |                           |   |                             |
| <b>HITACHI / HIKOKI</b> |                           |   |                                     |                           |   |                             |
| DH50SH1                 |                           |   |                                     |                           |   |                             |
| H45FRV                  |                           |   |                                     |                           |   |                             |
| DH38YA                  |                           |   |                                     |                           |   |                             |
| DH38VF                  |                           |   |                                     |                           |   |                             |
| DH40FA                  |                           |   |                                     |                           |   |                             |
| DH40FB                  |                           |   |                                     |                           |   |                             |
| DH40FR                  |                           |   |                                     |                           |   |                             |
| DH50SB                  |                           |   |                                     |                           |   |                             |
| DH50SBK                 |                           |   |                                     |                           |   |                             |
| H65 SD                  |                           |   |                                     |                           |   |                             |
| H70 SD                  |                           |   |                                     |                           |   |                             |
| H85                     |                           |   |                                     |                           |   |                             |
| H90 SE                  |                           |   |                                     |                           |   |                             |
| H65SB                   |                           |   |                                     |                           |   |                             |
| H65SB2                  |                           |   |                                     |                           |   |                             |
| H70 SA                  |                           |   |                                     |                           |   |                             |
| H90 SG                  |                           |   |                                     |                           |   |                             |


\*not comprehensive list

 Compatible





**ATTACHMENT**

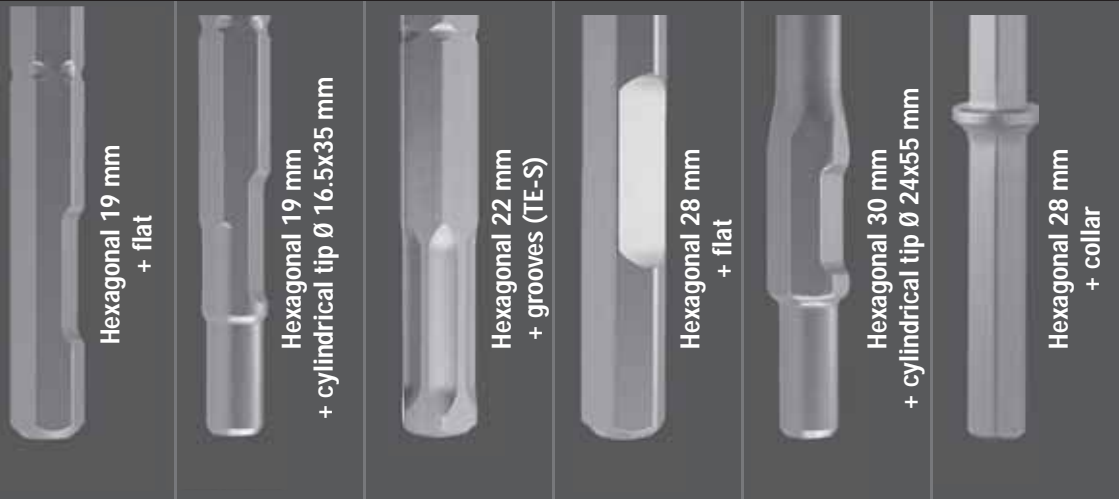

**ELECTRIC BREAKER**

|                  | Hexagonal 19 mm + flat | Hexagonal 19 mm + cylindrical tip Ø 16.5x35 mm | Hexagonal 22 mm + grooves (TE-S) | Hexagonal 28 mm + flat | Hexagonal 30 mm + cylindrical tip Ø 24x55 mm | Hexagonal 28 mm + collar |
|------------------|------------------------|--|----------------------------------|------------------------|--|--------------------------|
| <b>KANGO</b>     | 1400B                  |  |                                  |                        |  |                          |
|                  | 638S                   |  |                                  |                        |  |                          |
|                  | 800S                   |  |                                  |                        |  |                          |
|                  | 900B                   |  |                                  |                        |  |                          |
|                  | 900KS                  |  |                                  |                        |  |                          |
|                  | 900S                   |  |                                  |                        |  |                          |
|                  | 900XS                  |  |                                  |                        |  |                          |
|                  | 950B                   |  |                                  |                        |  |                          |
| <b>MAKITA</b>    | HM1200B                |  |                                  |                        |  |                          |
|                  | HM0810B                |  |                                  |                        |  |                          |
|                  | HM1140C                |  |                                  |                        |  |                          |
|                  | HM1242C                |  |                                  |                        |  |                          |
|                  | HR3520B                |  |                                  |                        |  |                          |
|                  | HR3850B                |  |                                  |                        |  |                          |
|                  | HR4040C                |  |                                  |                        |  |                          |
|                  | HR5000                 |  |                                  |                        |  |                          |
|                  | HM1304B                |  |                                  |                        |  |                          |
|                  | HM1500B                |  |                                  |                        |  |                          |
|                  | 8900N                  |  |                                  |                        |  |                          |
|                  | HM1300                 |  |                                  |                        |  |                          |
|                  | HM1303                 |  |                                  |                        |  |                          |
|                  | HM1304                 |  |                                  |                        |  |                          |
|                  | HM1317C                |  |                                  |                        |  |                          |
| HM1400           |                        |  |                                  |                        |  |                          |
| HM1500           |                        |  |                                  |                        |  |                          |
| <b>METABO</b>    | Bh1130S                |  |                                  |                        |  |                          |
|                  | Bh1131S                |  |                                  |                        |  |                          |
|                  | BhE6030S               |  |                                  |                        |  |                          |
|                  | RH66                   |  |                                  |                        |  |                          |
|                  | RH99                   |  |                                  |                        |  |                          |
|                  | RH99X                  |  |                                  |                        |  |                          |
| <b>MILWAUKEE</b> | 5335                   |  |                                  |                        |  |                          |
|                  | 5311                   |  |                                  |                        |  |                          |
|                  | 5312                   |  |                                  |                        |  |                          |
|                  | 5316                   |  |                                  |                        |  |                          |
|                  | 5317                   |  |                                  |                        |  |                          |
|                  | 5343                   |  |                                  |                        |  |                          |
|                  | 5344                   |  |                                  |                        |  |                          |
|                  | 5347                   |  |                                  |                        |  |                          |
|                  | 5348                   |  |                                  |                        |  |                          |
|                  | 5352                   |  |                                  |                        |  |                          |
|                  | 5353                   |  |                                  |                        |  |                          |
|                  | PH11H                  |  |                                  |                        |  |                          |
|                  | PH40H                  |  |                                  |                        |  |                          |
|                  | <b>RYOBI</b>           | CH465K   |                                  |                        |  |                          |
| CH486K           |                        |  |                                  |                        |  |                          |
| <b>SPIT</b>      | 400                    |  |                                  |                        |  |                          |
|                  | 400S                   |  |                                  |                        |  |                          |
| <b>WACKER</b>    | EHB11BLS               |  |                                  |                        |  |                          |

\*not comprehensible list

Compatible

Ref.  
310

Pointed chisel hexagonal 19 mm with 37 mm flat spot



| Ø                             | TL  | Ref.        | Gencod        | Qty |
|-------------------------------|-----|-------------|---------------|-----|
| <b>Hexagonal 19 mm + flat</b> |     |             |               |     |
| 19                            | 400 | 310H19L0400 | 3336600190306 | 1   |



Ref.  
347

Flat chisel hexagonal 19 mm with flat 37 mm flat spot



| Width                         | TL  | Ref.        | Gencod        | Qty |
|-------------------------------|-----|-------------|---------------|-----|
| <b>Hexagonal 19 mm + flat</b> |     |             |               |     |
| 24                            | 400 | 347L24L0400 | 3336600190313 | 1   |



Ref.  
324

Pointed chisel hexagonal 19 mm with cylindrical tip 16,5x35mm



| Ø   | TL  | Ref.        | Gencod        | Qty |
|---|-----|-------------|---------------|-----|
| <b>Hexagonal 19 mm + cylindrical tip Ø 16.5x35 mm</b> |     |             |               |     |
| 19  | 300 | 324H19L0300 | 3336600013148 | 1   |
| 19  | 400 | 324H19L0400 | 3336600013155 | 1   |



Ref.  
320

Flat chisel hexagonal 19 mm with cylindrical tip 16,5x35mm



| Width   | TL  | Ref.        | Gencod        | Qty |
|---|-----|-------------|---------------|-----|
| <b>Hexagonal 19 mm + cylindrical tip Ø 16.5x35 mm</b> |     |             |               |     |
| 24  | 300 | 320L24L0300 | 3336600063587 | 1   |
| 24  | 400 | 320L24L0400 | 3336600063594 | 1   |
| 80  | 300 | 320L80L0300 | 3336600063617 | 1   |





Ref.  
359

Pointed chisel hexagonal 22 mm with 6 grooves TE-S



| Ø                                   | TL  | Ref.        | Gencod        | Qty |
|-------------------------------------|-----|-------------|---------------|-----|
| <b>Hexa 22mm + 6 grooves (TE'S)</b> |     |             |               |     |
| 22                                  | 360 | 359D22L0360 | 3336600173392 | 1   |



Ref.  
355

Flat chisel hexagonal 22 mm with 6 grooves TE-S



| Width                               | TL  | Ref.        | Gencod        | Qty |
|-------------------------------------|-----|-------------|---------------|-----|
| <b>Hexa 22mm + 6 grooves (TE'S)</b> |     |             |               |     |
| 28                                  | 360 | 355L28L0360 | 3336600173408 | 1   |



Ref.  
354

Pointed chisel hexagonal 28 mm with 70 mm flat spot



| Ø                             | TL  | Ref.        | Gencod        | Qty |
|-------------------------------|-----|-------------|---------------|-----|
| <b>Hexagonal 28 mm + flat</b> |     |             |               |     |
| 28                            | 400 | 354H28L0400 | 3336600171848 | 1   |



Ref.  
341

Flat chisel hexagonal 28 mm with 70 mm flat spot



| Width                         | TL  | Ref.        | Gencod        | Qty |
|-------------------------------|-----|-------------|---------------|-----|
| <b>Hexagonal 28 mm + flat</b> |     |             |               |     |
| 32                            | 400 | 341L32L0400 | 3336600173385 | 1   |



Ref.  
321H

Pointed chisel hexagonal 28 mm with collar



| Ø                                      | TL  | Ref.         | Gencod        | Qty |
|--|-----|--------------|---------------|-----|
| <b>Hexagonal 28x160 mm with collar</b> |     |              |               |     |
| 28                                     | 560 | 321HD28L0560 | 3336600195417 | 1   |



Ref.  
351H

Flat chisel hexagonal 28 mm with collar



| Width                                  | TL  | Ref.         | Gencod        | Qty |
|--|-----|--------------|---------------|-----|
| <b>Hexagonal 28x160 mm with collar</b> |     |              |               |     |
| 30                                     | 560 | 351HL30L0560 | 3336600195424 | 1   |
| 85                                     | 520 | 351HL85L0520 | 3336600196483 | 1   |



Ref.  
373HL

Shovel chisel hexagonal 28 mm with collar



| Width                                  | TL  | Ref.          | Gencod        | Qty |
|--|-----|---------------|---------------|-----|
| <b>Hexagonal 28x160 mm with collar</b> |     |               |               |     |
| 75                                     | 560 | 373HL75L0560  | 3336600196469 | 1   |
| 125                                    | 510 | 373HL125L0510 | 3336600196476 | 1   |



Ref.  
393

Pointed chisel hexagonal 30 mm with cylindrical tip 24x55mm



| Ø  | TL  | Ref.        | Gencod        | Qty |
|--|-----|-------------|---------------|-----|
| <b>Hexagonal 30 mm + cylindrical tip Ø 24x 55 mm</b> |     |             |               |     |
| 24   | 400 | 393D24L0400 | 3336600083233 | 1   |





Ref.  
394

Flat chisel hexagonal 30 mm with cylindrical tip 24x55mm



| TL   | Ref.        | Gencod        | Qty |
|--|-------------|---------------|-----|
| <b>Hexagonal 30 mm + cylindrical tip Ø 24x 55 mm</b> |             |               |     |
| 400  | 394L32L0400 | 3336600083219 | 1   |
| 400  | 394L75L0400 | 3336600083202 | 1   |





# DIAMOND CORE BIT RANGE

## Hard materials and abrasive concretes



Diamond core bit Diager new segment are more resistant. New segment are made with titan coated diamond which allows smooth an effective work and makes lifetime longer.

### Benefits

- Drill rebar.
- Corrugated segments : better evacuation of rubble, less effort for the machine and for the user.
- Open segments : Crown ready for use.
- Forsheda® seal.

### Applications

For passing electrical cable ducts, water or evacuation pipes, ventilation duct,...

### Advices

For an always efficient cut, think to sharpen the segments with regularity with the sharpening stone ref 441.

## Special asphalt



### ON REQUEST

- Connection 3 holes ref. 436c
  - Other length
  - Specifics materials




# Core drilling manual

## Selecting tools



### Hardware compatibility

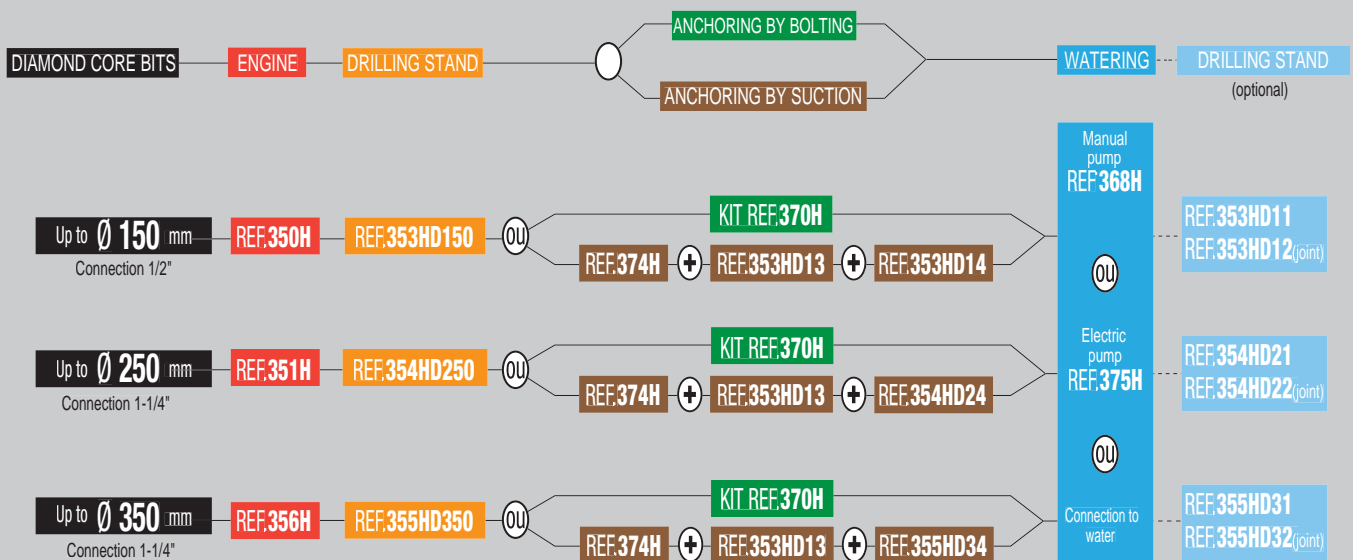

Ref.  
436A

# Diamond core bit

## Diamond core bit 1/2" male

High performance diamond core bit for concrete and building materials



• 3 TIMES MORE HOLES

### Features

- Corrugated segment.
- High diamond concentration.
- Coated diamond grit.

### Benefits

- Drilling reinforced concrete.
- Wavy segment reduce friction and optimize drilling effort.

### Applications


- Passage of electric ducts, exhaust pipes or ventilation ducts.

### Advices

- For a constant efficiency and better lifespan use the sharpening stone ref 441



Reinforced concrete, Concrete, Stone, Granit, Brick

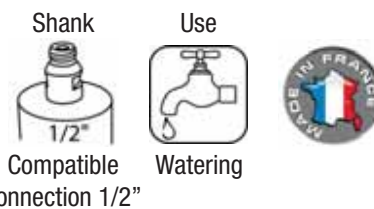

Compatible connection 1/2"

### ON REQUEST

- Connection 3 holes réf. 436c
- Other length
- Specifics materials



Sharpening stone Ref.441



Paperboard

| Ø                               | WL  | Ref.          | Gencod        | Qty |
|---------------------------------|-----|---------------|---------------|-----|
| <b>Connection 1/2" - Lu 400</b> |     |               |               |     |
| 30                              | 400 | 436AD030L0400 | 3336600158238 | 1   |
| 35                              | 400 | 436AD035L0400 | 3336600144965 | 1   |
| 40                              | 400 | 436AD040L0400 | 3336600144972 | 1   |
| 46                              | 400 | 436AD046L0400 | 3336600144989 | 1   |
| 51                              | 400 | 436AD051L0400 | 3336600174627 | 1   |
| 56                              | 400 | 436AD056L0400 | 3336600173927 | 1   |
| 61                              | 400 | 436AD061L0400 | 3336600159143 | 1   |
| 66                              | 400 | 436AD066L0400 | 3336600174665 | 1   |
| 71                              | 400 | 436AD071L0400 | 3336600174146 | 1   |
| 82                              | 400 | 436AD082L0400 | 3336600174566 | 1   |
| 87                              | 400 | 436AD087L0400 | 3336600176553 | 1   |
| 92                              | 400 | 436AD092L0400 | 3336600174542 | 1   |
| 102                             | 400 | 436AD102L0400 | 3336600174528 | 1   |
| 112                             | 400 | 436AD112L0400 | 3336600158832 | 1   |
| 127                             | 400 | 436AD127L0400 | 3336600168206 | 1   |
| 132                             | 400 | 436AD132L0400 | 3336600174535 | 1   |
| 152                             | 400 | 436AD152L0400 | 3336600175075 | 1   |
| 162                             | 400 | 436AD162L0400 | 3336600174559 | 1   |
| 169                             | 400 | 436AD169L0400 | 3336600175853 | 1   |
| 200                             | 400 | 436AD200L0400 | 3336600173477 | 1   |



Ref.  
436B

# Diamond core bit

## Diamond core bit 1-1/4" female

High performance diamond core bit for concrete, concrete with rebar and building materials



• 3 TIMES MORE HOLES

### Features

- Corrugated segment.
- High diamond concentration.
- Coated diamond grit.

### Benefits

- Drilling reinforced concrete.
- Wavy segment reduce friction and optimize drilling effort.

### Applications

- Passage of electric ducts, exhaust pipes or ventilation ducts.

### Advices

- For a constant efficiency and better lifespan use the sharpening stone ref 441



Reinforced concrete, Concrete, Stone, Granit, Brick



Compatible



Watering



connection 1-1/4"



Paperboard

| Ø                                 | WL  | Ref.          | Gencod        | Qty | Ø   | WL  | Ref.          | Gencod        | Qty |
|-----------------------------------|-----|---------------|---------------|-----|-----|-----|---------------|---------------|-----|
| <b>Connection 1-1/4" - Lu 450</b> |     |               |               |     |     |     |               |               |     |
| 46                                | 450 | 436BD046L0450 | 3336600174405 | 1   | 212 | 450 | 436BD212L0450 | 3336600154575 | 1   |
| 51                                | 450 | 436BD051L0450 | 3336600144996 | 1   | 225 | 450 | 436BD225L0450 | 3336600145207 | 1   |
| 56                                | 450 | 436BD056L0450 | 3336600145009 | 1   | 226 | 450 | 436BD226L0450 | 3336600154582 | 1   |
| 61                                | 450 | 436BD061L0450 | 3336600145016 | 1   | 248 | 450 | 436BD248L0450 | 3336600154599 | 1   |
| 66                                | 450 | 436BD066L0450 | 3336600145023 | 1   | 250 | 450 | 436BD250L0450 | 3336600145214 | 1   |
| 71                                | 450 | 436BD071L0450 | 3336600145030 | 1   | 266 | 450 | 436BD266L0450 | 3336600154605 | 1   |
| 76                                | 450 | 436BD076L0450 | 3336600145047 | 1   | 277 | 450 | 436BD277L0450 | 3336600154612 | 1   |
| 82                                | 450 | 436BD082L0450 | 3336600145054 | 1   | 297 | 450 | 436BD297L0450 | 3336600154629 | 1   |
| 87                                | 450 | 436BD087L0450 | 3336600145061 | 1   | 300 | 450 | 436BD300L0450 | 3336600145238 | 1   |
| 92                                | 450 | 436BD092L0450 | 3336600145078 | 1   | 342 | 450 | 436BD342L0450 | 3336600154636 | 1   |
| 102                               | 450 | 436BD102L0450 | 3336600145085 | 1   | 350 | 450 | 436BD350L0450 | 3336600145245 | 1   |
| 112                               | 450 | 436BD112L0450 | 3336600145092 | 1   | 353 | 450 | 436BD353L0450 | 3336600154643 | 1   |
| 117                               | 450 | 436BD117L0450 | 3336600145108 | 1   | 400 | 450 | 436BD400L0450 | 3336600145252 | 1   |
| 122                               | 450 | 436BD122L0450 | 3336600145115 | 1   |     |     |               |               |     |
| 127                               | 450 | 436BD127L0450 | 3336600145122 | 1   |     |     |               |               |     |
| 132                               | 450 | 436BD132L0450 | 3336600145139 | 1   |     |     |               |               |     |
| 142                               | 450 | 436BD142L0450 | 3336600145146 | 1   |     |     |               |               |     |
| 152                               | 450 | 436BD152L0450 | 3336600145153 | 1   |     |     |               |               |     |
| 162                               | 450 | 436BD162L0450 | 3336600145160 | 1   |     |     |               |               |     |
| 169                               | 450 | 436BD169L0450 | 3336600154186 | 1   |     |     |               |               |     |
| 172                               | 450 | 436BD172L0450 | 3336600145177 | 1   |     |     |               |               |     |
| 182                               | 450 | 436BD182L0450 | 3336600145184 | 1   |     |     |               |               |     |
| 187                               | 450 | 436BD187L0450 | 3336600154551 | 1   |     |     |               |               |     |
| 196                               | 450 | 436BD196L0450 | 3336600154568 | 1   |     |     |               |               |     |
| 200                               | 450 | 436BD200L0450 | 3336600145191 | 1   |     |     |               |               |     |

Forsheda® seal compatible

Ref.  
439B

# Diamond core bit

## Diamond core bit 1-1/4" female

High performance diamond core bit for abrasive materials such asphalt and tarmac



### • SPECIAL ASPHALT

#### Features

- Special asphalt composition.
- High diamond concentration.
- Coated diamond grit.

#### Benefits

- High resistance in abrasive materials such asphalt and tarmac.

#### Applications

- For asphalt

#### Advices

- For a constant efficiency and better lifespan use the sharpening stone ref 441



Asphalt



Compatible connection 1-1/4"



Paperboard

| Ø                                 | WL  | Ref.          | Gencod        | Qty |
|-----------------------------------|-----|---------------|---------------|-----|
| <b>Connection 1-1/4" - Lu 450</b> |     |               |               |     |
| 66                                | 450 | 439BD066L0450 | 3336600161832 | 1   |
| 82                                | 450 | 439BD082L0450 | 3336600158849 | 1   |
| 92                                | 450 | 439BD092L0450 | 3336600158856 | 1   |
| 102                               | 450 | 439BD102L0450 | 3336600158863 | 1   |
| 112                               | 450 | 439BD112L0450 | 3336600158870 | 1   |
| 117                               | 450 | 439BD117L0450 | 3336600196537 | 1   |
| 122                               | 450 | 439BD122L0450 | 3336600157668 | 1   |
| 127                               | 450 | 439BD127L0450 | 3336600158887 | 1   |
| 132                               | 450 | 439BD132L0450 | 3336600158894 | 1   |
| 142                               | 450 | 439BD142L0450 | 3336600158900 | 1   |
| 152                               | 450 | 439BD152L0450 | 3336600157415 | 1   |
| 162                               | 450 | 439BD162L0450 | 3336600158917 | 1   |
| 172                               | 450 | 439BD172L0450 | 3336600158924 | 1   |
| 182                               | 450 | 439BD182L0450 | 3336600158931 | 1   |
| 196                               | 450 | 439BD196L0450 | 3336600158948 | 1   |
| 200                               | 450 | 439BD200L0450 | 3336600158955 | 1   |
| 250                               | 450 | 439BD250L0450 | 3336600192607 | 1   |
| 266                               | 450 | 439BD266L0450 | 3336600174573 | 1   |



Ref.  
RESEG

# Diamond core bit

## Reloading

When your diamond core bit is worn our after sale service assure reloading.  
Contact us for more information.



### • AFTER-SALES SERVICE

#### Reloading Diamond core bit

- Maximum  $\phi$ : 450 mm.
- Phone number: +33 3 84 73 74 75.
- Fax: +33 3 84 73 74 74.

#### Return address

SAV Couronne - Batiment 4  
Rue Roger Thirode - 39800 Poligny France.

Segment



9 mm

Wavy or  
straight



Paperboard

| Ref.                | Gencod        | Qty | Ref.                    | Gencod        | Qty |
|---------------------|---------------|-----|-------------------------|---------------|-----|
| <b>Wavy segment</b> |               |     | <b>Straight segment</b> |               |     |
| RESEGM436D030       | 3336600175730 | 1   | RESEGM436D225           | 3336600175488 | 1   |
| RESEGM436D035       | 3336600175303 | 1   | RESEGM436D226           | 3336600176591 | 1   |
| RESEGM436D040       | 3336600175310 | 1   | RESEGM436D248           | 3336600175778 | 1   |
| RESEGM436D046       | 3336600175747 | 1   | RESEGM436D250           | 3336600175495 | 1   |
| RESEGM436D051       | 3336600175327 | 1   | RESEGM436D266           | 3336600176607 | 1   |
| RESEGM436D056       | 3336600175334 | 1   | RESEGM436D275           | 3336600175785 | 1   |
| RESEGM436D061       | 3336600175341 | 1   | RESEGM436D277           | 3336600176614 | 1   |
| RESEGM436D066       | 3336600175358 | 1   | RESEGM436D297           | 3336600176621 | 1   |
| RESEGM436D071       | 3336600175365 | 1   | RESEGM436D300           | 3336600175501 | 1   |
| RESEGM436D076       | 3336600175754 | 1   | RESEGM436D342           | 3336600176638 | 1   |
| RESEGM436D082       | 3336600175372 | 1   | RESEGM436D350           | 3336600175518 | 1   |
| RESEGM436D087       | 3336600175617 | 1   | RESEGM436D353           | 3336600175792 | 1   |
| RESEGM436D092       | 3336600175624 | 1   | RESEGM436D400           | 3336600176645 | 1   |
| RESEGM436D102       | 3336600175389 | 1   |                         |               |     |
| RESEGM436D112       | 3336600175396 | 1   |                         |               |     |
| RESEGM436D117       | 3336600175402 | 1   |                         |               |     |
| RESEGM436D122       | 3336600175419 | 1   |                         |               |     |
| RESEGM436D127       | 3336600175426 | 1   |                         |               |     |
| RESEGM436D132       | 3336600175433 | 1   |                         |               |     |
| RESEGM436D142       | 3336600175631 | 1   |                         |               |     |
| RESEGM436D152       | 3336600175440 | 1   |                         |               |     |
| RESEGM436D162       | 3336600175457 | 1   |                         |               |     |
| RESEGM436D169       | 3336600175648 | 1   |                         |               |     |
| RESEGM436D172       | 3336600175464 | 1   |                         |               |     |
| RESEGM436D182       | 3336600175655 | 1   |                         |               |     |
| RESEGM436D187       | 3336600176577 | 1   |                         |               |     |
| RESEGM436D196       | 3336600175761 | 1   |                         |               |     |
| RESEGM436D200       | 3336600175471 | 1   |                         |               |     |
| RESEGM436D212       | 3336600176584 | 1   |                         |               |     |

Ref.  
350H

# Drilling motor

## Diamond drilling machine 2000W combi 1/2" female 1-1/4" male

**Features**

- Power 2000W.
- Electrical overload indication.
- ø max drill concrete 150 mm and max drill brick 200 mm.

- Drill connection 1/2" female and 1-1/4" male.
- Weight 6,5 kg.

**Benefits**

- 3 speeds: 450-1050-2000 RPM.
- Soft grip for less vibration and anti skid.



Shank



Combi 1/2" Female and 1-1/4" Male



Plastic case

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 350H | 3336600155169 | 1   |

**AFTER-SALES SERVICE**

**Motors and Drilling stand**

An engine failure, a broken part, our after-sales service ensures the repair and the supply of spare parts.

To obtain a quote or a support form, contact our ADV department directly.

Phone number : +33 3 84 73 69 22 - Fax : +33 3 84 73 74 74

Ref.  
398H

# Drilling motor

## Hand drilling motor 2000 W combi 1/2" female 1-1/4" male

**Features**

- Power 2000W.
- Electrical overload indication.
- ø max drill concrete 150 mm and max drill brick 200 mm.

- Drill connection 1/2" female and 1-1/4" male.
- Weight 7,5 kg.

**Benefits**

- 3 speeds: 450-1050-2000 RPM.
- Soft grip for less vibration and anti skid.



Shank



Combi 1/2" Female and 1-1/4" Male



Plastic case

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 398H | 3336600190085 | 1   |



Ref.  
351H

# Drilling motor

Diamond drilling machine 2500W 1-1/4" Male

### Features

- Power 2500W.
- Electrical overload indication.
- ø max drill concrete 250 mm.

- Drill connection 1-1/4" male.
- Weight 11,5 kg.

### Benefits

- 3 speeds: 200-400-950 RPM.
- Waterflow indicator



Shank



Compatible  
1-1/4" Male



Paperboard

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 351H | 3336600155176 | 1   |

Ref.  
356H

# Drilling motor

Diamond drilling machine 3400W 1-1/4" Male

**new**

### Features

- Power 3400W.
- Electrical overload indication.
- ø max drill concrete 350 mm.
- Drill connection 1-1/4" male.
- Weight 12,5 kg.

### Benefits

- 3 speeds: 230-520-965 RPM.
- Equipped with quadruple security; electronic (1) and mechanical clutch (2), PRCD

switch (3) and start current limiter (4).



Shank



Compatible  
1-1/4" Male



Paperboard

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 356H | 3336600201293 | 1   |

Ref.  
353H

# Drilling stand

Drilling stand capacity 150mm

**Features**

- For drill motor 2000W.
- Max ø of drilling: 150 mm.
- Dimensions: 45 x 23 x 90 cm.
- Weight: 8 kg.



Paperboard

| Ref.     | Gencod        | Qty |
|----------|---------------|-----|
| 353HD150 | 3336600155206 | 1   |



**AFTER-SALES SERVICE**

**Motors and Drilling stand**

An engine failure, a broken part, our after-sales service ensures the repair and the supply of spare parts.

To obtain a quote or a support form, contact our ADV department directly.

Phone number : +33 3 84 73 69 22 - Fax : +33 3 84 73 74 74

Ref.  
354H

# Drilling stand

Drilling stand capacity 250mm

**Features**

- For drill motor 2500W and 3400W
- Max ø of drilling: 250 mm.
- Dimensions: 46 x 27 x 120 cm.
- Weight: 15 kg.



Paperboard

| Ref.     | Gencod        | Qty |
|----------|---------------|-----|
| 354HD250 | 3336600155213 | 1   |





Ref.  
355H

# Drilling stand

Drilling stand capacity 350mm

## Features

- For drill motor 2500 and 3400W.
- Max  $\varnothing$  of drilling: 350 mm.
- Dimensions: 46 x 27 x 120 cm.
- Weight: 22 kg.



Paperboard

| Ref.     | Gencod        | Qty |
|----------|---------------|-----|
| 355HD350 | 3336600155220 | 1   |



Ref.  
356E

# Diamond equipment pack 2000W



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 356E | 3336600173149 | 1   |

Ref.  
399H

# Anchoring set for drilling stand



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 399H | 3336600197565 | 1   |

# ADVICES

- Manual drilling :  $\varnothing 82$  mm maximum.
- After use : Let the machine run with no load for 1 minute.
- Use 1 electric extension with a section of 3x4.5mm minimum.

| Recommended rotation speed according to the maximum $\varnothing$ to drill |   |                     |                     |
|--|---|---------------------|---------------------|
| Speed selector   | 350H and 398H (2000W)                                     | 351H (2500W)        | 356H (3400W)        |
| <b>1</b>   | Brick $\varnothing$ 200mm<br>Concrete $\varnothing$ 150mm | $\varnothing$ 250mm | $\varnothing$ 350mm |
| <b>2</b>   | Brick $\varnothing$ 120mm<br>Concrete $\varnothing$ 80mm  | $\varnothing$ 125mm | $\varnothing$ 250mm |
| <b>3</b>   | Brick $\varnothing$ 80mm<br>Concrete $\varnothing$ 40mm   | $\varnothing$ 85mm  | $\varnothing$ 150mm |





Ref.  
370H

Diamond drilling accessories - anchoring  
M<sub>12</sub> tensioning spindle.



Envelope Label



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 370H | 3336600156845 | 1   |

Ref.  
F71

Diamond drilling accessories - anchoring  
50 D<sub>ropin</sub> anchor M<sub>12</sub>x50mm.



Carton box



| Ref.           | Gencod        | Qty |
|----------------|---------------|-----|
| F71M12050000XX | 3336600161641 | 1   |

Ref.  
F710F

Diamond drilling accessories - anchoring  
D<sub>ropin</sub> anchor tool for M<sub>12</sub>x50.



Quality plastic pouch



| Ref.           | Gencod        | Qty |
|----------------|---------------|-----|
| F71M120000000F | 3336600161689 | 1   |

Ref.  
373H

Diamond drilling accessories - anchoring  
A<sub>nchoring</sub> with prop 290 cm max.



Paperboard



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 373H | 3336600156876 | 1   |

Ref. 353HD13

Diamond drilling accessories - suction fixing

Vaccum set for drilling stand for drilling stand diager 353H - 354H - 355H.



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 353HD13 | 3336600155299 | 1   |

Ref. 353HD14

Diamond drilling accessories - suction fixing

Joint for dilling stand 353H Anchoring by suction rubber joint for drilling stand 353H.



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 353HD14 | 3336600155329 | 1   |

Ref. 354HD24

Diamond drilling accessories - suction fixing

Joint for dilling stand 354H Anchoring by suction rubber joint for drilling stand 354H.



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 354HD24 | 3336600155336 | 1   |

Ref. 355HD34

Diamond drilling accessories - suction fixing

Joint for dilling stand 355H Anchoring by suction rubber joint for drilling stand 355H.



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 355HD34 | 3336600155343 | 1   |



Ref.  
374H

## Diamond drilling accessories - suction fixing

Electric air pump suction.



Paperboard

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 374H | 3336600167049 | 1   |

Ref.  
375H

## Diamond drilling accessories - water use

Electric water pump pipe + 2 connections.



Paperboard

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 375H | 3336600167018 | 1   |

Ref.  
368H

## Diamond drilling accessories - water use

Plastic water pump manual use.



Paperboard

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 368H | 3336600156913 | 1   |

Ref.  
353HD11

## Diamond drilling accessories - water collector

Water collector for stand D150 with rubber joint for drilling stand diager 353H.



Paperboard

| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 353HD11 | 3336600155237 | 1   |

Ref. 354HD21

Diamond drilling accessories - water collector  
Water collector for stand D250 with rubber joint for drilling stand diager 354H.



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 354HD21 | 3336600155244 | 1   |

Ref. 355HD31


Diamond drilling accessories - water collector  
Water collector for stand D350 with rubber joint for drilling stand diager 355H.



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 355HD31 | 3336600155251 | 1   |

Ref. 353HD12

Diamond drilling accessories - water collector  
Rubber joint for item 353HD11 for watter collector Diager 353HD11



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 353HD12 | 3336600155268 | 1   |

Ref. 354HD22

Diamond drilling accessories - water collector  
Rubber joint for item 354HD21 for watter collector Diager 354HD21.



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 354HD22 | 3336600155275 | 1   |



Ref.  
355HD32

## Diamond drilling accessories - water collector

Rubber joint for item 355HD31 for watter collector Diager 355HD31.



Paperboard



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 355HD32 | 3336600155282 | 1   |

Ref.  
347H

## Diamond drilling accessories - machine adapter

Adaptater M 1/2" - M16.



Paperboard



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 347H | 3336600195066 | 1   |

Ref.  
369H

## Diamond drilling accessories - machine adapter

Adapter 1/2" G-5/4" male.



Twistpack



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 369H | 3336600156944 | 1   |

Ref.  
381H

## Diamond drilling accessories - machine adapter

Adapter for DD-BI 1-1/4" male for hilti machine DD 80/100/110/120/130/150.



Twistpack



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 381H | 3336600156982 | 1   |

Ref.  
382H

Diamond drilling accessories - machine adapter

Adapter 1/2" female 1-1/4" male for hilti machine DD 160/250/400/750.



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 382H | 3336600156968 | 1   |

Ref.  
385H

Diamond drilling accessories - machine adapter

Adapter 1/2" female 1-1/4" male for hilti machine DD200/350/500.



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 385H | 3336600156975 | 1   |

Ref.  
390H

Diamond drilling accessories - machine adapter

Adapter 1/2" female 1-1/4" female.



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 390H | 3336600156951 | 1   |

Ref.  
394H

Diamond drilling accessories - machine adapter

Adapter 1/2" female - 1/2" female.



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 394H | 3336600178670 | 1   |

Ref.  
**383H**

## Diamond drilling accessories - extension

Extension 200mm 1/2" male.



Twistpack



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 383H | 3336600156999 | 1   |

Ref.  
**384H**

## Diamond drilling accessories - extension

Extension 300mm 1-1/4" male.



Twistpack



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 384H | 3336600157002 | 1   |

Ref.  
**392H**

## Diamond drilling accessories

Chaise adapter collar 60mm for motor 1800 & 2000 watts on drilling stand D250 and D350.



Paperboard



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 392H | 3336600157019 | 1   |

Ref.  
**441**

## Diamond drilling accessories



Quality plastic pouch



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 441  | 3336600158757 | 1   |



Ref.  
393H

Diamond drilling accessories  
Spacer block 60mm for drilling stand diager 354H and 355H



Envelope Label



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 393H | 3336600173811 | 1   |

Ref.  
397H

Diamond drilling accessories  
Disassembly ring 1-1/4"



Envelope Label



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 397H | 3336600156920 | 1   |



# DIAMANT CONCEPT

Diamon core bit  
exhibition

Dimensions :  
H 1400 x L 1000x P 500 mm  
Concept on wheels,  
can be positioned  
on sales shelf head or on island  
in a self-service area

**Storage area**  
Accessories and Adapters

Flyers Informations

Space dedicated for  
refilling demand

**Storage area**  
Machines

**Storage area**  
Box for return  
core bit



**Storage area**  
Diamond core bit

OR TO INTEGRATE  
ON SALES SHELF

1M support to present diamond core bits.  
Choice of hooks according to attachment : 1/2 & 1-1/4.

| Designation   | Ref.   | Gencod        |
|---|--------|---------------|
| CONCEPT FURNITURE DIAMOND                                     | M00160 | 3336609005991 |
| SUPPORT FOR DIAMOND CORE BIT<br>(to attribute with 1 BAR1000) | M00150 | 3336609004468 |
| HOOK FOR CORE BIT 1/2"  | M00122 | 3336609004338 |
| HOOK FOR CORE BIT 1-1/4"                                      | M00123 | 3336609004345 |



Ref.  
426

# Blue Ceram



Blue ceram diamond core bit hexagonal shank

Diamond segment head specially designed for drilling stoneware and hard porcelain tiles.



Tile, Sandstone, Glazed sandstone, Gre-ceram, Sandware terracota, Marble

**+**  
• SANDSTONE  
UP TO CLASS 5

**Features**

- Head with diamond segment.
- Hexagonal shank.

**Benefits**

- Drilling stoneware tiles and ceramic.
- Clean hole.

**Advices**

- For dry use on angle grinder the chuck M14 is needed. Remove the centring flange from the grinder before screwing on the chuck.
- Can be use on a drilling machine without percussion. For more efficiency add a little water.
- Start drilling at 45°.

Shank



Hexagonal

Use



Without  
percussion



ALL  
SETS  
PAGES 122-123

x6



426C

x9



426B

| Ø                 | TL | Ref.     | Gencod        | Qty |
|-------------------|----|----------|---------------|-----|
| <b>Blue Ceram</b> |    |          |               |     |
| 6                 | 55 | 426D06   | 3336600144415 | 1   |
| 6,5               | 55 | 426D06.5 | 3336600157873 | 1   |
| 7                 | 55 | 426D07   | 3336600144422 | 1   |
| 8                 | 55 | 426D08   | 3336600144439 | 1   |
| 10                | 65 | 426D10   | 3336600144446 | 1   |
| 12                | 65 | 426D12   | 3336600144453 | 1   |
| 13                | 65 | 426D13   | 3336600157880 | 1   |
| 15                | 70 | 426D15   | 3336600144460 | 1   |
| 20                | 70 | 426D20   | 3336600144477 | 1   |
| 25                | 70 | 426D25   | 3336600144484 | 1   |




Plastic box

with GRINDER



dry use



with DRILL



can be used with a little water  
for a more effective drilling



see our  
video on  
YouTube



Ref.  
416

## Sharpening stone

Sharpening stone 160 x 40 x 20 mm for blue ceram core drill.



Blister

| Lt  | Ref. | Gencod        | Qt. |
|-----|------|---------------|-----|
| 160 | 416  | 3336600146921 | 1   |



Ref.  
416A

## Sharpening stone

Sharpening stone 75 x 35 x 18 mm for blue ceram core drill.



Blister

| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 70 | 416A | 3336600186156 | 1   |



Ref.  
417

## Sharpening stone

Sharpening stone 60 x 40 x 20 mm for blue ceram core drill.

| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 60 | 417  | 3336600147331 | 1   |



### SHARPENING-BRIGHTENING-DIAMOND TOOLS

Sharpen restore the cutting power of the tool.  
To sharpen, drill at slow speed in the sharpening stone.




new

# DIAMOND HOLE SAW



Range  
**Ø 30 to 83**  
mm





■ **DIAMOND**  
High quality

**PILOT**  
COMPATIBLE WITH DIAMOND  
AND CARBIDE HOLE SAWS



This pilot with hexagonal 8,5 shank allow to change of hole saw in a single step. It's necessary to screw an adapter (440B) on the diamond hole saw, then clips it inside the pilot.

**CENTER DRILL / ref.440A**  
PRE-DRILLING  
PILOT HOLE




1. Pre-dill a hole with the center drill.
2. Then set up simultaneously drill and hole saw (remove previously the adapter from the drill) on the onehand pilot.
3. Drill using the pre-hole.





## CERAMIC, GRANITE, MARBLE




### GRINDER

Screw directly on grinder with M14 fitting



 To avoid any risk of injury wait the complete stop of the machine before removing the tool.




DIAMOND HOLE SAWS  
ø 30 to 83mm



*without adapter  
without pilot*

## SIMPLE AND FAST ASSEMBLY

Can be used on a drill via an adapter and a pilot (onehand system). With drilling speed up to 1500 rpm.

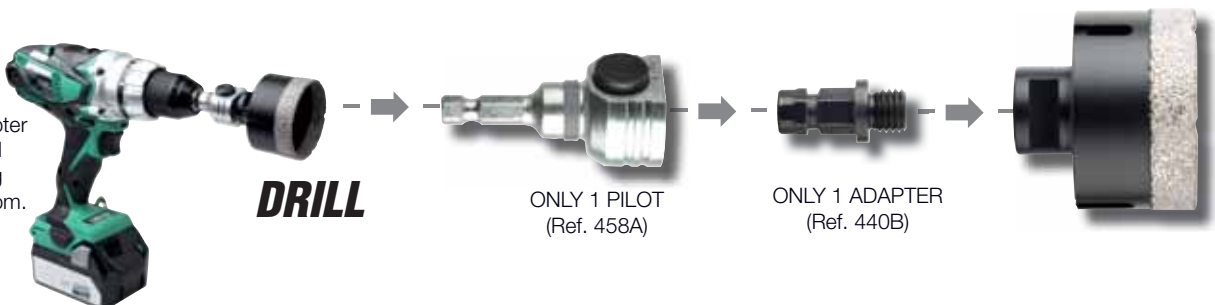

**DRILL**

ONLY 1 PILOT  
(Ref. 458A)

ONLY 1 ADAPTER  
(Ref. 440B)



Ref.  
440C

# Diamond hole saw

## M14 connection

Diamond grit edge hole saws specially developed for dry drilling in extremely hard materials.



- VERSATILITY
- DRY DRILLING

### Features

- M14 thread for angle grinder.
- Premium grade diamond grit.

### Benefits

- Cutting depth 35mm.
- Dry drilling.
- Clean edges and fast accurate cuts.

### Advices

- Start the drilling at 45°.
- Recommended drilling speed > 1500 rpm.
- To avoid the risk of injury, wait until the machine has come to a complete stop before removing the tool from the hole.



Tile, Sandstone, Glazed sandstone, Gre-ceram, Sandware terracota, Marble

|       |            |            |         |
|-------|------------|------------|---------|
| Shank | Use        |            | Grinder |
|       |            |            |         |
| M14   | Without    | Without    |         |
|       | percussion | percussion |         |



Elister

| Ø                       | WL | TL | Ref.     | Gencod        | Qty |
|-------------------------|----|----|----------|---------------|-----|
| <b>Diamond hole saw</b> |    |    |          |               |     |
| 30                      | 35 | 60 | 440CD030 | 3336600199309 | 1   |
| 35                      | 35 | 60 | 440CD035 | 3336600199316 | 1   |
| 40                      | 35 | 60 | 440CD040 | 3336600199323 | 1   |
| 45                      | 35 | 60 | 440CD045 | 3336600199330 | 1   |
| 51                      | 35 | 60 | 440CD051 | 3336600199347 | 1   |
| 55                      | 35 | 60 | 440CD055 | 3336600199354 | 1   |
| 60                      | 35 | 60 | 440CD060 | 3336600199361 | 1   |
| 68                      | 35 | 60 | 440CD068 | 3336600199378 | 1   |
| 73                      | 35 | 60 | 440CD073 | 3336600199385 | 1   |
| 76                      | 35 | 60 | 440CD076 | 3336600199392 | 1   |
| 83                      | 35 | 60 | 440CD083 | 3336600199408 | 1   |

Ref.  
440A

Diamond hole saw center drill to use with a drilling machine



Drill



| Designation  | Ref.        | Gencod        | Qty |
|--|-------------|---------------|-----|
| Onehand diamond hole saw center drill<br>L= 110 ø 8mm for marble, tiles and wall | 440AD08L110 | 3336600199033 | 1   |

Ref.  
440B

Diamond hole saw M14 adapter to use with the center drill on drilling machine



Drill



| Designation  | Ref.       | Gencod        | Qty |
|--|------------|---------------|-----|
| Onehand diamond adapter<br>3 pcs for diamond hole saw with M14 shank<br>ø 30 à 83 mm | 440BD05132 | 3336600199071 | 1   |

Ref.  
358A

Pilote onehand hexagonal to use on a drilling machine



Drill



| Designation                                 | Ref.      | Gencod        | Qty |
|---|-----------|---------------|-----|
| Pilot onehand HEX<br>Hexagonal pilot 8,5 mm | 358AH08.5 | 3336600199002 | 1   |

Ref.  
431

# Diamond core bit

## M16 connection

Diamond core bit for dry use



- ROBUSTNESS
- VERSATILITY

### Features

- Corrugated segment.
- Working length 66 mm.

### Benefits

- Dry use.
- Use on a drilling machine without percussion.


### Advices

- Use on a drilling machine, recommended speed 2500 rpm.



Concrete, Breeze block, Brick, Hollow brick, Cellular concrete, Ceramic tile

Shank Wavy segment



ALL SETS  
PAGES 122-123

x4



431C



Black plastic clip

| Ø            | WL | Ref.   | Gencod        | Qty |
|--------------|----|--------|---------------|-----|
| <b>Lt 88</b> |    |        |               |     |
| 68           | 66 | 431D68 | 3336600145832 | 1   |
| 82           | 66 | 431D82 | 3336600145849 | 1   |



1/ Pre-drill with Ø8 on the desired depth.  
2/ Fit the bit on the adapter and insert the centering guide.

3/ Place the centering guide with the bit in the pre-hole in order to begin coring.

4/ Drill to the desired depth.

see our video on  
**YouTube**



Ref.  
432

## M16 connection

Diamond core bit for dry use



Twistpack

| Ø             | WL  | Ref.   | Gencod        | Qty |
|---------------|-----|--------|---------------|-----|
| <b>Lt 181</b> |     |        |               |     |
| 29            | 154 | 432D29 | 3336600145856 | 1   |
| 35            | 154 | 432D35 | 3336600145863 | 1   |
| 42            | 154 | 432D42 | 3336600145870 | 1   |
| 52            | 154 | 432D52 | 3336600145887 | 1   |
| 65            | 154 | 432D65 | 3336600145894 | 1   |

Ref.  
433

## Hexagonal adapter M16 x 100mm



Twistpack

| TL                           | Ref.     | Gencod        | Qty |
|------------------------------|----------|---------------|-----|
| <b>Hexa core bit adapter</b> |          |               |     |
| 100                          | 433L0100 | 3336600145900 | 1   |
| 220                          | 433L0220 | 3336600146112 | 1   |
| 320                          | 433L0320 | 3336600146129 | 1   |

Ref.  
367

## Accessories for carbide core bit M16



Black plastic clip

| TL                                  | Ref.     | Gencod        | Qty |
|-------------------------------------|----------|---------------|-----|
| <b>Compatible SDS-Plus core bit</b> |          |               |     |
| 100                                 | 367L0100 | 3336600063891 | 1   |
| 170                                 | 367L0170 | 3336600063907 | 1   |
| 220                                 | 367L0220 | 3336600063914 | 1   |
| 320                                 | 367L0320 | 3336600063921 | 1   |

Ref.  
420

## Centering guide 8x120 mm



Quality plastic pouch



| Ø                      | TL  | Ref.        | Gencod        | Qty |
|------------------------|-----|-------------|---------------|-----|
| <b>Centering guide</b> |     |             |               |     |
| 8                      | 120 | 420D08L0120 | 3336600173699 | 1   |
| 8                      | 210 | 420D08L0210 | 3336600173705 | 1   |

Ref.  
427

## Sharpening stone

Sharpening stone 200 x 100 mm for diamond core bit 431 & 432.



Blister

| TL                      | Ref. | Gencod        | Qty |
|-------------------------|------|---------------|-----|
| <b>Sharpening stone</b> |      |               |     |
| 200                     | 427  | 3336600155084 | 1   |

new

# CARBIDE HOLE SAW



Range  
**Ø 19 to 140**  
mm

## **PILOT** COMPATIBLE WITH DIAMOND AND CARBIDE HOLE SAWS



This pilot with hexagonal 8,5 or SDS-plus shank allow to change of hole saw in a single step. It's only need to clips carbide hole saw with integrated adapter inside the pilot with center drill.

## **LONG ADAPTER/ ref. 357J** ENLARGE A PRE-EXISTING HOLE



Allow to use two carbide holes saws simultaneously to improve centering or enlarge a pre-existing hole.



## **WOOD, HOLLOW BRICK, PVC, PLASTER**



## **SIMPLE AND FAST ASSEMBLY**





Ref.  
357L

# Carbide hole saw

Multi purpose hole saw carbide tipped teeth with quick lock adapter

Hole saw with carbide tooth set for clean and high performance cutting. Carbide tipped teeth are made of high carbide grade, resulting in outstanding cutting performance and product durability. To be used with the pilot drill bit (onehand system) allowing an important time saving thanks to the locking and unlocking of the saw in only 1 movement.



- VERSATILITY
- SPEED OF USE

### Features

- Cutting depth 60 mm.
- High grade carbide teeth.

### Benefits

- Large clearance of chips thanks to the specially designed wide slots
- Smooth cutting with minimal heat build-up
- Suitable for use in electric and battery powered tools

### Applications

- Installation of sockets, switches, spotlights...

### Advices

- Adapt the rotational speed and the centring drill according to the material to be drilled.

| Ø                       | Ref.     | Gencod        | Qty |
|-------------------------|----------|---------------|-----|
| <b>Carbide hole saw</b> |          |               |     |
| 19                      | 357LD019 | 3336600199095 | 1   |
| 20                      | 357LD020 | 3336600199101 | 1   |
| 22                      | 357LD022 | 3336600199118 | 1   |
| 25                      | 357LD025 | 3336600199125 | 1   |
| 29                      | 357LD029 | 3336600199132 | 1   |
| 32                      | 357LD032 | 3336600199149 | 1   |
| 35                      | 357LD035 | 3336600199156 | 1   |
| 38                      | 357LD038 | 3336600199477 | 1   |
| 40                      | 357LD040 | 3336600199163 | 1   |
| 44                      | 357LD044 | 3336600199170 | 1   |
| 51                      | 357LD051 | 3336600199187 | 1   |
| 54                      | 357LD054 | 3336600199484 | 1   |
| 57                      | 357LD057 | 3336600199194 | 1   |
| 60                      | 357LD060 | 3336600199200 | 1   |
| 65                      | 357LD065 | 3336600199491 | 1   |
| 67                      | 357LD067 | 3336600199637 | 1   |
| 68                      | 357LD068 | 3336600199217 | 1   |
| 76                      | 357LD076 | 3336600199231 | 1   |
| 83                      | 357LD083 | 3336600199248 | 1   |
| 89                      | 357LD089 | 3336600199255 | 1   |
| 102                     | 357LD102 | 3336600199262 | 1   |
| 114                     | 357LD114 | 3336600199279 | 1   |
| 127                     | 357LD127 | 3336600199286 | 1   |
| 140                     | 357LD140 | 3336600199293 | 1   |



Drill and hammer drill

Wood, Hollow brick, PVC, Plaster

| Ø              | Rotation speed carbide hole saw |         |         |              |
|----------------|---------------------------------|---------|---------|--------------|
|                | Wood                            | Plastic | Plaster | Hollow brick |
| <b>19-38</b>   | 800                             | 600     | 600     | 600 rpm      |
| <b>40-51</b>   | 700                             | 450     | 450     | 450 rpm      |
| <b>52-76</b>   | 500                             | 350     | 350     | 350 rpm      |
| <b>79-108</b>  | 300                             | 250     | 250     | 250 rpm      |
| <b>111-140</b> | 200                             | 150     | 150     | 150 rpm      |

Ref.  
357M

Multi purpose hole saw 68mm with countersink ring and quick lock adapter



| Ø                       | Ref.     | Gencod        | Qty |
|-------------------------|----------|---------------|-----|
| <b>Carbide hole saw</b> |          |               |     |
| 68                      | 357MD068 | 3336600199507 | 1   |

Ref.  
357A

Pilote onehand hex + HSS drill hexagonal shank 8,5mm



Blister

| Ref.           | Gencod        | Qty |
|----------------|---------------|-----|
| 357AH06.35L125 | 3336600198968 | 1   |




Ref.  
357B

Pilote onehand + carbide drill hexagonal shank 8,5mm



Blister

| Ref.        | Gencod        | Qty |
|-------------|---------------|-----|
| 357BH07L125 | 3336600198975 | 1   |



Ref.  
357C

Pilote onehand SDS+ HSS drill



Blister

| Ref.           | Gencod        | Qty |
|----------------|---------------|-----|
| 357CD06.35L125 | 3336600198982 | 1   |




Ref.  
357E

Pilote onehand carbide drill SDS+ shank



Blister

| Ref.         | Gencod        | Qty |
|--------------|---------------|-----|
| 357ED07L0125 | 3336600199996 | 1   |



Ref.  
357F

Hss drill for onehand pilote



| Designation                                       | Ref.            | Gencod        | Qty |
|---|-----------------|---------------|-----|
| Centring drill bit hss with flats Ø 6,35mm L125mm | 357FD06.35L0125 | 3336600199019 | 1   |




Ref.  
357G

Carbide drill - onehand pilote



| Designation  | Ref.         | Gencod        | Qty |
|--|--------------|---------------|-----|
| Centring drill bit carbide with flats Ø 7mm L125mm | 357GD07L0125 | 3336600199026 | 1   |



Ref.  
357H

3 Connectors onehand hole saw for multi purpose hole saw 19-30 mm



| Designation   | Ref.       | Gencod        | Qty |
|---|------------|---------------|-----|
| Pack of 3 adapters onehand for carbide hole saw ø19 to 30mm | 357HD14030 | 3336600199040 | 1   |

Ref.  
357I

3 Connectors onehand hole saw for multi purpose hole saw 32-140 mm



| Designation  | Ref.       | Gencod        | Qty |
|--|------------|---------------|-----|
| Pack of 3 adapters onehand for carbide hole saw ø32 to 140mm | 357ID32210 | 3336600199057 | 1   |

Ref.  
357J

3 Long connectors for hole saws to connect 2 hole saws on the same connector



2 holes saws Ø 19 to 30 mm



1 hole saw Ø 19 to 30 mm + 1 hole saw Ø 32 to 140 mm



2 holes saws Ø 32 to 140 mm

| Designation   | Ref.       | Gencod        | Qt |
|---|------------|---------------|----|
| Pack of 3 long adapters onehand allowing to use 2 carbide holes saws simultaneously | 357JD14210 | 3336600199064 | 1  |



Ref.  
3000C  
3000E

Multi purpose hole saw set sizes ø22-35-40-51-54-65-68 + pilote + 2 drill bit



| Composition  | Ref.  | Gencod        | Qty |
|--|-------|---------------|-----|
| <b>Electrician toolbox</b>   |       |               |     |
| Carbide hole saws (ø22-35-40-51-54-65-68 mm) + pilot onehand with hexagonal shank 8,5mm with HSS center drill HSS + 1 carbide center drill + 1 allen key | 3000C | 3336600199446 | 1   |
| <b>Plumber toolbox</b>   |       |               |     |
| Carbide hole saws (ø19-25-32-38-44-57-68 mm) + pilot onehand with hexagonal shank 8,5mm with HSS center drill + 1 carbide center drill + 1 allen key     | 3000E | 3336600199453 | 1   |

Ref.  
3000A  
3000B


Multi purpose hole saw kit 68 include pilot and drill bit



| Composition  | Ref.  | Gencod        | Qty |
|--|-------|---------------|-----|
| <b>Starter kit hole saw ø68mm</b>  |       |               |     |
| 1 multimaterials Carbide hole saw ø 68mm with stop Depth ø 73mm + onehand pilot with hexagonal shank 8,5 mm and HSS center drill bit                     | 3000A | 3336600199415 | 1   |
| <b>Starter kit hole saw ø68 - 83mm</b>   |       |               |     |
| 2 multimaterials Carbide hole saw ( ø 68mm and 83mm) + onehand pilot with hexagonal shank 8,5 mm and HSS centring drill bit + 1 carbide center drill bit | 3000B | 3336600199422 | 1   |

# CONCRETE DRILLING

3M CONCRETE  
SPECIALIST

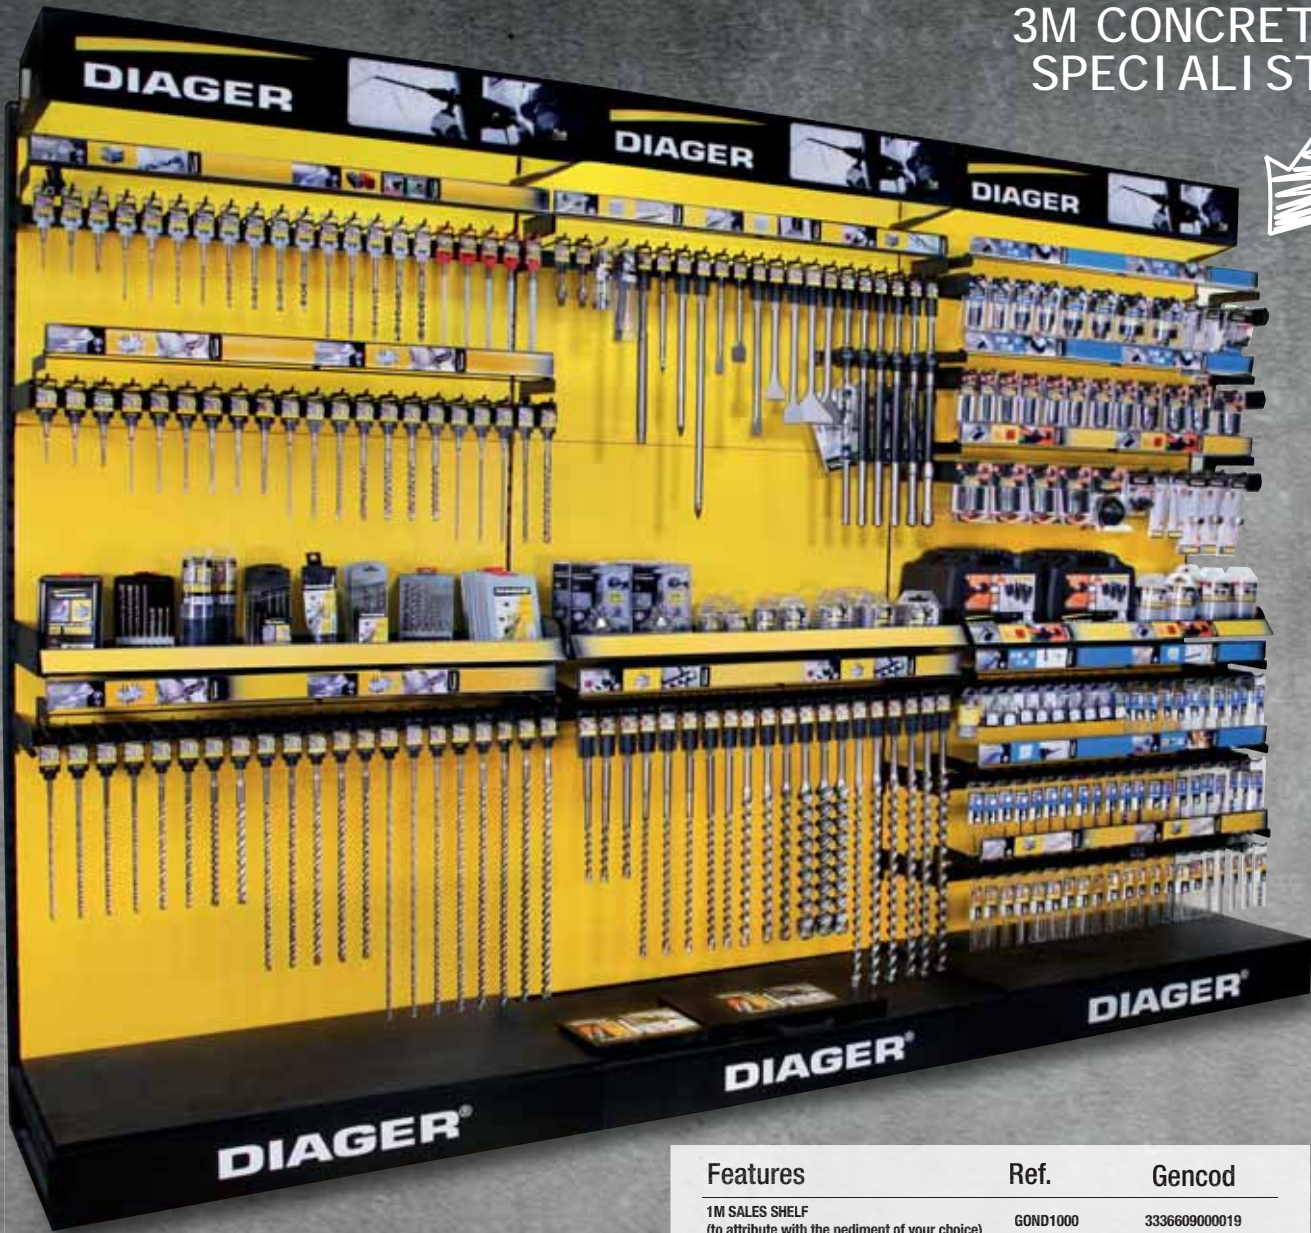

| Features   | Ref.          | Gencod         |
|--|---------------|----------------|
| 1M SALES SHELF<br>(to attribute with the pediment of your choice)                | GOND1000      | 3336609000019  |
| NEXT 1M SALES SHELF<br>(to attribute with the pediment of your choice)           | GOND1001      | 3336609000033  |
| LUMINAR PEDIMENT FOR 1M SALES SHELF  | M00202        | 33366090009500 |
| ELECTRIC CABLE FOR LUMINAR PEDIMENT<br>(to attribute with each pediment command) | CORDON        | 3336600187528  |
| DIAGER PEDIMENT FOR 1M SALES SHELF   | FR1000        | 33366090005472 |
| ADJUSTABLE RACK 1M 20 DOUBLE HOOKS   | RAT1000DOUBLE | 33366090002211 |
| ADJUSTABLE RACK WITHOUT HOOKS 1M   | M00150        | 33366090004468 |
| DOUBLE HOOK  | M00151        | 33366090004475 |
| SIMPLE HOOK  | M00152        | 33366090004482 |
| ADJUSTABLE SHELF WIDTH 900MM<br>DEPTH 360MM                                      | M00167        | 33366090006141 |
| BANNER DIAMOND HOLE SAW  | B440C         | 3336609010506  |
| BANNER CARBIDE HOLE SAW  | B357L         | 3336609010490  |





FACE 1

FACE 2

FACE 3

## IMPLANTATION ON REVOLVING DISPLAY

On display rack  
by using the mobile stand.



On sales shelf  
by using the bracket.

## P.O.S ADVERTISING TO SPUR SALES




### Floor display

To promote the carbide hole saw range.  
Ref. C00116



### Stand counter

To promote cases.  
Ref. C00107

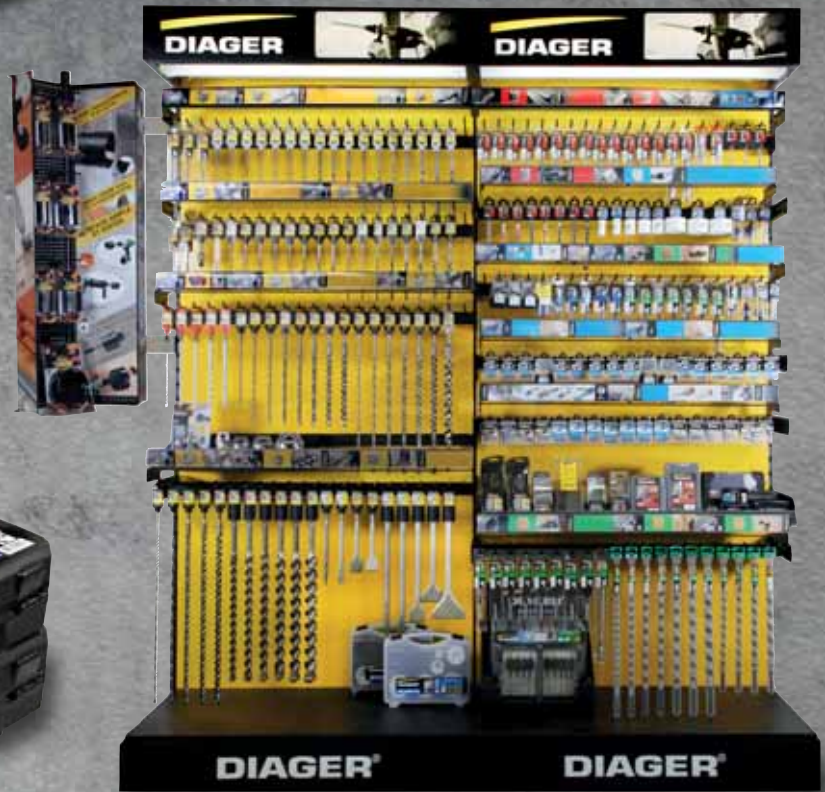

### Features

### Ref.

### Gencod

|   |        |               |
|---|--------|---------------|
| REVOLVING DISPLAY                                     | M00129 | 3336609004352 |
| BRACKET FOR INSTALLATION ON RACK                      | M00204 | 3336609010476 |
| STAND FOR REVOLVING DISPLAY                           | M00130 | 3336609004369 |
| PIN FOR PERFORATED METAL SHEET                        | M00113 | 3336609000620 |
| BANNER DIAMOND HOLE SAW (INT)                         | B00513 | 3336600200913 |
| BANNER CARBIDE HOLE SAW (INT)                         | B00514 | 3336600200920 |
| BANNER CARBIDE AND DIAMOND HOLE SAW ACCESSORIES (INT) | B00515 | 3336600200937 |
| MAGNET DIAMOND HOLE SAW (EXT)                         | B00516 | 3336600200944 |
| MAGNET CARBIDE HOLE SAW (EXT)                         | B00517 | 3336600200951 |
| MAGNET CARBIDE AND DIAMOND HOLE SAW ACCESSORIES (EXT) | B00518 | 3336600201569 |
| FLOOR DISPLAY PROMOTION CARBIDE HOLE SAW              | C00116 | 3336609010445 |
| CARDBOARD P.O.S FOR SETS PRESENTATION                 | C00107 | 3336609007308 |



Ref.  
326C

# Carbide core bit set

## Compatible SDS-plus

Ready to use : carbide core 40 mm, SDS-plus adapter and centering drill bit.



### • LARGE DIAMETER

#### Features

- Carbide teeth brazed at high temperature
- High strength steel.

#### Benefits

- Large diameter drilling.
- Suitable for hammer machine less than 700W.
- Drilling depth 40 mm.

#### Applications


- Installation of sockets, switches, spotlights...



Concrete, Brick, Breeze block, Hollow brick

Shank

Hammer drill



Compatible  
SDS-plus



Blister

| Ø                   | WL | TL  | Ref.     | Gencod        | Qty |
|---------------------|----|-----|----------|---------------|-----|
| <b>Core bit kit</b> |    |     |          |               |     |
| 40                  | 40 | 150 | 326CD040 | 3336600196551 | 1   |
| 50                  | 40 | 150 | 326CD050 | 3336600196568 | 1   |
| 66                  | 40 | 150 | 326CD066 | 3336600196575 | 1   |
| 68                  | 40 | 150 | 326CD068 | 3336600157569 | 1   |
| 80                  | 40 | 150 | 326CD080 | 3336600197305 | 1   |

Ref.  
328

# Carbide core bit accessories




Black plastic clip



| TL  | Ref.     | Gencod        | Qty |
|---|----------|---------------|-----|
| <b>Compatible SDS-Plus core bit adapter</b> |          |               |     |
| 150   | 328L0090 | 3336600063730 | 1   |
| 260   | 328L200  | 3336600016064 | 1   |

Core bit adapter + Centering drill bit  
ref. 328

Core bit  
ref. 326C



Ref.  
366

# Carbide core bit

## M16 connection

### Features

- Carbide teeth brazed at high temperature.
- High strength steel.
- M16 connection.
- Can be used with a core bit adapter M16 compatible SDS-plus or hexagonal.

### Benefits

- Large diameter drilling.
- High resistance and lifetime.

### Applications

- Installation of electric sockets.

### Advices

- Suitable for hammer drilling machine between 700 and 950 W.



Concrete, Stone, Brick, Breeze block

Connection

Hammer



Compatible  
SDS-plus



Twistpack

| Ø               | WL | TL | Ref.    | Gencod        | Qty |
|-----------------|----|----|---------|---------------|-----|
| <b>Core bit</b> |    |    |         |               |     |
| 30              | 50 | 70 | 366D30  | 3336600063754 | 1   |
| 35              | 50 | 70 | 366D35  | 3336600063761 | 1   |
| 40              | 50 | 70 | 366D40  | 3336600063778 | 1   |
| 45              | 50 | 70 | 366D45  | 3336600063785 | 1   |
| 50              | 50 | 70 | 366D50  | 3336600063792 | 1   |
| 60              | 50 | 70 | 366D60  | 3336600063808 | 1   |
| 66              | 50 | 70 | 366D66  | 3336600063815 | 1   |
| 68              | 50 | 70 | 366D68  | 3336600063822 | 1   |
| 70              | 50 | 70 | 366D70  | 3336600063839 | 1   |
| 80              | 50 | 70 | 366D80  | 3336600063846 | 1   |
| 85              | 50 | 70 | 366D85  | 3336600063853 | 1   |
| 90              | 50 | 70 | 366D90  | 3336600063860 | 1   |
| 105             | 50 | 70 | 366D105 | 3336600063877 | 1   |
| 125             | 50 | 70 | 366D125 | 3336600063884 | 1   |
| 130             | 50 | 70 | 366D130 | 3336600157637 | 1   |

Ref.  
370

## Accessories for carbide core bit M16



DIY tube



| Ø                         | WL | TL  | Ref.        | Gencod        | Qty |
|---------------------------|----|-----|-------------|---------------|-----|
| <b>Centring drill bit</b> |    |     |             |               |     |
| 8                         | 65 | 100 | 370D09L0100 | 3336600063952 | 1   |

Ref.  
367

## Accessories for carbide core bit M16



Black plastic clip



| TL  | Ref.     | Gencod        | Qty |
|---|----------|---------------|-----|
| <b>Compatible SDS-Plus core bit adapter</b> |          |               |     |
| 100   | 367L0100 | 3336600063891 | 1   |
| 170   | 367L0170 | 3336600063907 | 1   |
| 220   | 367L0220 | 3336600063914 | 1   |
| 320   | 367L0320 | 3336600063921 | 1   |

Ref.  
300

# Carbide core bit

## Compatible SDS-max

### Features

- High strength steel.
- Carbide teeth brazed at high temperature.

### Benefits

- L.arge diameter drilling.
- High reistance and lifetime.

### Applications

- Sanitary and renovation works.

### Advices

- When mounting, make sure


that the core bit is locked to the cone of the adapter.

- Make a pre-drilling hole using only the centre drill.



Concrete, Stone, Brick, Breeze block

Cone-shaped shank Hammer drill



Compatible SDS-max



Twistpack

| Ø               | WL | TL  | Ref.    | Gencod        | Qty |
|-----------------|----|-----|---------|---------------|-----|
| <b>Core bit</b> |    |     |         |               |     |
| 30              | 75 | 100 | 300D30  | 3336600016088 | 1   |
| 35              | 75 | 100 | 300D35  | 3336600016095 | 1   |
| 40              | 75 | 100 | 300D40  | 3336600012745 | 1   |
| 45              | 75 | 100 | 300D45  | 3336600016101 | 1   |
| 50              | 75 | 100 | 300D50  | 3336600016118 | 1   |
| 60              | 75 | 100 | 300D60  | 3336600012752 | 1   |
| 66              | 75 | 100 | 300D66  | 3336600012769 | 1   |
| 68              | 75 | 100 | 300D68  | 3336600187122 | 1   |
| 70              | 75 | 100 | 300D70  | 3336600016125 | 1   |
| 80              | 75 | 100 | 300D80  | 3336600016132 | 1   |
| 90              | 75 | 100 | 300D90  | 3336600016149 | 1   |
| 100             | 75 | 100 | 300D100 | 3336600012776 | 1   |
| 110             | 75 | 100 | 300D110 | 3336600016156 | 1   |
| 125             | 75 | 100 | 300D125 | 3336600016163 | 1   |
| 150             | 75 | 100 | 300D150 | 3336600186118 | 1   |

Ref.  
300C

# Set carbide core bit

## Compatible SDS-max



| Ø                   | Ref.     | Gencod        | Qty |
|---------------------|----------|---------------|-----|
| <b>Core bit kit</b> |          |               |     |
| 100                 | 300CD100 | 3336600197312 | 1   |
| 125                 | 300CD125 | 3336600197329 | 1   |



Ref.  
**302**

## Accessories for carbide core bit compatible SDS-max



DIY tube



| Ø                         | WL | TL  | Ref. | Gencod        | Qty |
|---------------------------|----|-----|------|---------------|-----|
| <b>Centring drill bit</b> |    |     |      |               |     |
| 11                        | 90 | 120 | 302  | 3336600012806 | 1   |

Ref.  
**330**

## Accessories for carbide core bit compatible SDS-max



Black plastic clip



| TL   | Ref.     | Gencod        | Qty |
|--|----------|---------------|-----|
| <b>Compatible SDS-max core bit adapter</b> |          |               |     |
| 220  | 330L0220 | 3336600016194 | 1   |
| 420  | 330L0420 | 3336600012790 | 1   |
| 700  | 330L0700 | 3336600016200 | 1   |
| 900  | 330L0900 | 3336600063969 | 1   |

Ref.  
**303**

## Accessories for carbide core bit compatible SDS-max




Twistpack



| Ref.                  | Gencod        | Qty |
|-----------------------|---------------|-----|
| <b>Extraction kit</b> |               |     |
| 303                   | 3336600012813 | 1   |

**Carbide Core bit  
Compatible with  
SDS-max**

**Pro Carbide Core bit  
Compatible with  
SDS-plus**

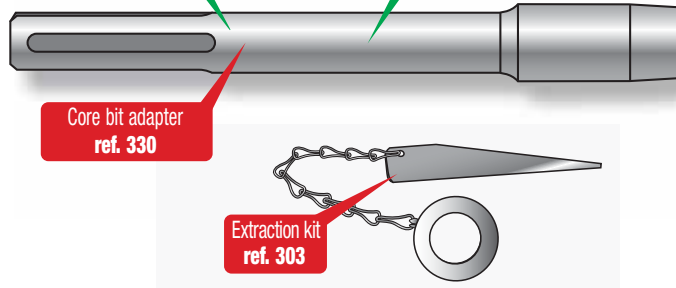

Core bit adapter  
refs. 367 ou 368

Core bit adapter  
ref. 330

Extraction kit  
ref. 303

Core bit  
ref. 366

Centering drill bit  
ref. 370

Core bit  
ref. 300

Foret Centreur  
ref. 302

Ref.  
263

# Optima3+



3 Cutting edges concrete drill bit cylindrical shank

The innovative geometry of the 3 cutting edges carbide tip bit enables precise drilling and increase lifetime.



## • 3 CUTTING EDGES TECHNOLOGY

### Features

- Monobloc carbide tip.
- Centering tip 130°.
- 3 flutes.

### Benefits

- Perfectly round and calibrated hole.
- Lifetime improved due to the 3 contact point.
- Improved strength of fasteners.



Concrete, Granit, Stone, Brick, Breeze block, Hollow brick

Shank



Cylindrical



Quality plastic pouch

| Ø                   | WL  | TL  | Ref.        | Gencod        | Qty |
|---------------------|-----|-----|-------------|---------------|-----|
| <b>Short series</b> |     |     |             |               |     |
| *3                  | 20  | 60  | 263D03      | 3336600189638 | 1   |
| 4                   | 35  | 75  | 263D04      | 3336600160415 | 1   |
| 5                   | 45  | 100 | 263D05      | 3336600152991 | 1   |
| 6                   | 60  | 100 | 263D06      | 3336600153004 | 1   |
| 6.5                 | 60  | 100 | 263D06.5    | 3336600153998 | 1   |
| 8                   | 80  | 120 | 263D08      | 3336600153011 | 1   |
| 10                  | 80  | 120 | 263D10      | 3336600153028 | 1   |
| 12                  | 110 | 150 | 263D12      | 3336600153035 | 1   |
| 13                  | 110 | 150 | 263D13      | 3336600154001 | 1   |
| <b>L150</b>         |     |     |             |               |     |
| 5                   | 110 | 150 | 263D05L0150 | 3336600189072 | 1   |
| 6                   | 110 | 150 | 263D06L0150 | 3336600189089 | 1   |

\* Non polished finish

ALL SETS PAGES 120-121

x5



263B

see our video on YouTube

Ref.  
226

# Mega

## Concrete drill bit cylindrical shank

High resistance carbide tip for intensive use.



Concrete, Stone, Brick, Breeze block, Plaster


ALL  
SETS  
PAGES 120-121



256C



211C



Non polished  
finish



Quality plastic  
pouch



### • INTENSIVE USE

#### Features

- Semi-positive carbide tip.
- «U» shaped flute.

#### Benefits

- Fast dust evacuation.
- Intensive use.

Shank



Cylindrical

| Ø                   | WL  | TL  | Ref.        | Gencod        | Qty |
|---------------------|-----|-----|-------------|---------------|-----|
| <b>Short series</b> |     |     |             |               |     |
| 3                   | 20  | 60  | 226D03      | 3336600028296 | 1   |
| 4                   | 35  | 75  | 226D04      | 3336600028302 | 1   |
| 5                   | 45  | 85  | 226D05      | 3336600028319 | 1   |
| 5.5                 | 45  | 85  | 226D05.5    | 3336600028470 | 1   |
| 6                   | 60  | 100 | 226D06      | 3336600028326 | 1   |
| 6.5                 | 60  | 100 | 226D06.5    | 3336600028487 | 1   |
| 7                   | 60  | 100 | 226D07      | 3336600028333 | 1   |
| 8                   | 80  | 120 | 226D08      | 3336600028340 | 1   |
| 9                   | 80  | 120 | 226D09      | 3336600028357 | 1   |
| 10                  | 80  | 120 | 226D10      | 3336600028364 | 1   |
| 11                  | 110 | 150 | 226D11      | 3336600028371 | 1   |
| 12                  | 110 | 150 | 226D12      | 3336600028388 | 1   |
| 13                  | 110 | 150 | 226D13      | 3336600028395 | 1   |
| 14                  | 110 | 150 | 226D14      | 3336600028401 | 1   |
| 15                  | 110 | 150 | 226D15      | 3336600028418 | 1   |
| 16                  | 110 | 150 | 226D16      | 3336600028425 | 1   |
| 18                  | 120 | 160 | 226D18      | 3336600028432 | 1   |
| 20                  | 120 | 160 | 226D20      | 3336600028449 | 1   |
| 22                  | 120 | 160 | 226D22      | 3336600056749 | 1   |
| <b>L150</b>         |     |     |             |               |     |
| 5                   | 110 | 150 | 226D05L0150 | 3336600049062 | 1   |
| 6                   | 110 | 150 | 226D06L0150 | 3336600049079 | 1   |
| 10                  | 110 | 150 | 226D10L0150 | 3336600049116 | 1   |
| <b>L200</b>         |     |     |             |               |     |
| 6                   | 160 | 200 | 226D06L0200 | 3336600062740 | 1   |
| 8                   | 160 | 200 | 226D08L0200 | 3336600049123 | 1   |
| 10                  | 160 | 200 | 226D10L0200 | 3336600049130 | 1   |
| 12                  | 160 | 200 | 226D12L0200 | 3336600049147 | 1   |
| 14                  | 160 | 200 | 226D14L0200 | 3336600049154 | 1   |
| <b>L400</b>         |     |     |             |               |     |
| 6                   | 360 | 400 | 226D06L0400 | 3336600049178 | 1   |
| 8                   | 360 | 400 | 226D08L0400 | 3336600049192 | 1   |
| 10                  | 360 | 400 | 226D10L0400 | 3336600049215 | 1   |
| 12                  | 360 | 400 | 226D12L0400 | 3336600049239 | 1   |
| 14                  | 360 | 400 | 226D14L0400 | 3336600049253 | 1   |
| 16                  | 360 | 400 | 226D16L0400 | 3336600049277 | 1   |
| 20                  | 360 | 400 | 226D20L0400 | 3336600049291 | 1   |



Ref.  
264

# Pro

## Concrete drill bit cylindrical shank

High resistance carbide tip for a fast drilling.



### FAST DRILLING

#### Features

- Semi-positive carbide tip.
- Double flute.

#### Benefits

- Fast drilling speed.



Concrete, Stone, Brick, Breeze block, Plaster

Shank



Cylindrical



| Ø                   | WL  | TL  | Ref.        | Gencod        | Qty |
|---------------------|-----|-----|-------------|---------------|-----|
| <b>Short series</b> |     |     |             |               |     |
| 3                   | 20  | 60  | 264D03      | 3336600056060 | 1   |
| 3.5                 | 35  | 75  | 264D03.5    | 3336600056077 | 1   |
| 4                   | 45  | 85  | 264D04      | 3336600056084 | 1   |
| 5                   | 55  | 95  | 264D05      | 3336600056107 | 1   |
| 5.5                 | 60  | 100 | 264D05.5    | 3336600056114 | 1   |
| 6                   | 60  | 100 | 264D06      | 3336600056121 | 1   |
| 6.5                 | 80  | 100 | 264D06.5    | 3336600056138 | 1   |
| 7                   | 80  | 100 | 264D07      | 3336600056145 | 1   |
| 8                   | 80  | 120 | 264D08      | 3336600056152 | 1   |
| 9                   | 80  | 120 | 264D09      | 3336600056169 | 1   |
| 10                  | 80  | 120 | 264D10      | 3336600056176 | 1   |
| 11                  | 110 | 150 | 264D11      | 3336600056183 | 1   |
| 12                  | 110 | 150 | 264D12      | 3336600056190 | 1   |
| 13                  | 110 | 150 | 264D13      | 3336600056206 | 1   |
| 14                  | 110 | 150 | 264D14      | 3336600056213 | 1   |
| 16                  | 110 | 150 | 264D16      | 3336600056237 | 1   |
| 18                  | 120 | 160 | 264D18      | 3336600056244 | 1   |
| 20                  | 120 | 160 | 264D20      | 3336600056251 | 1   |
| <b>L150</b>         |     |     |             |               |     |
| 5                   | 110 | 150 | 264D05L0150 | 3336600056268 | 1   |
| 6                   | 110 | 150 | 264D06L0150 | 3336600056275 | 1   |
| 7                   | 110 | 150 | 264D07L0150 | 3336600056282 | 1   |
| 8                   | 110 | 150 | 264D08L0150 | 3336600056299 | 1   |
| 10                  | 110 | 150 | 264D10L0150 | 3336600056312 | 1   |
| <b>L200</b>         |     |     |             |               |     |
| 6                   | 160 | 200 | 264D06L0200 | 3336600056329 | 1   |
| 8                   | 160 | 200 | 264D08L0200 | 3336600056343 | 1   |
| 10                  | 160 | 200 | 264D10L0200 | 3336600056350 | 1   |
| 12                  | 160 | 200 | 264D12L0200 | 3336600056367 | 1   |



ALL SETS  
PAGES 120-121



208D



201C



299B


Ref.  
265

# Flash

## Concrete drill bit cylindrical shank

# FLASH

Specially designed for cordless drills.



### • CORDLESS DRILLS

#### FeaturesDescription

- Carbide tip with refined geometry.

#### BenefitsAvantages

- 20% more battery life.
- Higher carbide tip to stay on the axis.

Shank



Cylindrical



Concrete, Stone, Brick, Breeze block, Plaster

| Ø                  | WL  | TL  | Ref.          | Gencod        | Qty |
|--------------------|-----|-----|---------------|---------------|-----|
| <b>short serie</b> |     |     |               |               |     |
| 3                  | 20  | 60  | 265D03        | 3336600064485 | 1   |
| 3.5                | 35  | 75  | 265D03.5      | 3336600064492 | 1   |
| 4                  | 35  | 75  | 265D04        | 3336600064508 | 1   |
| 4.5                | 45  | 85  | 265D04.5      | 3336600064515 | 1   |
| 5                  | 45  | 85  | 265D05        | 3336600064522 | 1   |
| 5.5                | 55  | 95  | 265D05.5      | 3336600064539 | 1   |
| 6                  | 60  | 100 | 265D06        | 3336600064546 | 1   |
| 6.5                | 60  | 100 | 265D06.5      | 3336600064553 | 1   |
| 7                  | 60  | 100 | 265D07        | 3336600064560 | 1   |
| 7.5                | 80  | 120 | 265D07.5      | 3336600064577 | 1   |
| 8                  | 80  | 120 | 265D08        | 3336600064584 | 1   |
| 9                  | 80  | 120 | 265D09        | 3336600064607 | 1   |
| 10                 | 80  | 120 | 265D10        | 3336600064621 | 1   |
| 11                 | 110 | 150 | 265D11        | 3336600064638 | 1   |
| 12                 | 110 | 150 | 265D12        | 3336600064645 | 1   |
| 13                 | 110 | 150 | 265D13        | 3336600064652 | 1   |
| 14                 | 110 | 150 | 265D14        | 3336600064669 | 1   |
| 15                 | 110 | 150 | 265D15        | 3336600064676 | 1   |
| 16                 | 110 | 150 | 265D16        | 3336600064683 | 1   |
| 18                 | 120 | 160 | 265D18        | 3336600064706 | 1   |
| 19                 | 120 | 160 | 265D19        | 3336600064713 | 1   |
| 20                 | 120 | 160 | 265D20        | 3336600064720 | 1   |
| 22                 | 120 | 160 | 265D22        | 3336600064737 | 1   |
| 25                 | 120 | 160 | 265D25        | 3336600064744 | 1   |
| <b>L150</b>        |     |     |               |               |     |
| 5                  | 110 | 150 | 265D05L0150   | 3336600076365 | 1   |
| 5.5                | 110 | 150 | 265D05.5L0150 | 3336600052666 | 1   |
| 6                  | 110 | 150 | 265D06L0150   | 3336600074958 | 1   |
| 6.5                | 110 | 150 | 265D06.5L0150 | 3336600052673 | 1   |
| 7                  | 110 | 150 | 265D07L0150   | 3336600074996 | 1   |
| 8                  | 110 | 150 | 265D08L0150   | 3336600075023 | 1   |
| 10                 | 110 | 150 | 265D10L0150   | 3336600075078 | 1   |
| <b>L200</b>        |     |     |               |               |     |
| 6                  | 160 | 200 | 265D06L0200   | 3336600074965 | 1   |
| 7                  | 160 | 200 | 265D07L0200   | 3336600075009 | 1   |
| 8                  | 160 | 200 | 265D08L0200   | 3336600075030 | 1   |
| 10                 | 160 | 200 | 265D10L0200   | 3336600075085 | 1   |
| 12                 | 160 | 200 | 265D12L0200   | 3336600075122 | 1   |
| 14                 | 160 | 200 | 265D14L0200   | 3336600075184 | 1   |
| 16                 | 160 | 200 | 265D16L0200   | 3336600081284 | 1   |

Basic grey plastic pouch

| Ø            | WL  | TL   | Ref.        | Gencod        | Qty |
|--------------|-----|------|-------------|---------------|-----|
| <b>L300</b>  |     |      |             |               |     |
| 6            | 260 | 300  | 265D06L0300 | 3336600074972 | 1   |
| 8            | 260 | 300  | 265D08L0300 | 3336600075047 | 1   |
| 10           | 260 | 300  | 265D10L0300 | 3336600075092 | 1   |
| 12           | 260 | 300  | 265D12L0300 | 3336600075139 | 1   |
| 14           | 260 | 300  | 265D14L0300 | 3336600075191 | 1   |
| 16           | 260 | 300  | 265D16L0300 | 3336600075221 | 1   |
| 20           | 260 | 300  | 265D20L0300 | 3336600075269 | 1   |
| <b>L400</b>  |     |      |             |               |     |
| 6            | 360 | 400  | 265D06L0400 | 3336600074989 | 1   |
| 7            | 360 | 400  | 265D07L0400 | 3336600084063 | 1   |
| 8            | 360 | 400  | 265D08L0400 | 3336600075054 | 1   |
| 10           | 360 | 400  | 265D10L0400 | 3336600075108 | 1   |
| 12           | 360 | 400  | 265D12L0400 | 3336600075146 | 1   |
| 14           | 360 | 400  | 265D14L0400 | 3336600075207 | 1   |
| 15           | 360 | 400  | 265D15L0400 | 3336600082533 | 1   |
| 16           | 360 | 400  | 265D16L0400 | 3336600075238 | 1   |
| 18           | 360 | 400  | 265D18L0400 | 3336600075252 | 1   |
| 20           | 360 | 400  | 265D20L0400 | 3336600075276 | 1   |
| 22           | 360 | 400  | 265D22L0400 | 3336600075290 | 1   |
| 25           | 360 | 400  | 265D25L0400 | 3336600075313 | 1   |
| <b>L600</b>  |     |      |             |               |     |
| 6            | 560 | 600  | 265D06L0600 | 3336600077874 | 1   |
| 8            | 560 | 600  | 265D08L0600 | 3336600077867 | 1   |
| 10           | 560 | 600  | 265D10L0600 | 3336600075115 | 1   |
| 12           | 560 | 600  | 265D12L0600 | 3336600075153 | 1   |
| 14           | 560 | 600  | 265D14L0600 | 3336600075214 | 1   |
| 16           | 560 | 600  | 265D16L0600 | 3336600076303 | 1   |
| 18           | 560 | 600  | 265D18L0600 | 3336600076310 | 1   |
| 20           | 560 | 600  | 265D20L0600 | 3336600076327 | 1   |
| 22           | 560 | 600  | 265D22L0600 | 3336600077157 | 1   |
| <b>L1000</b> |     |      |             |               |     |
| 8            | 960 | 1000 | 265D08L1000 | 3336600101609 | 1   |
| 10           | 960 | 1000 | 265D10L1000 | 3336600101616 | 1   |
| 12           | 960 | 1000 | 265D12L1000 | 3336600101623 | 1   |
| 18           | 960 | 1000 | 265D18L1000 | 3336600101661 | 1   |
| 22           | 960 | 1000 | 265D22L1000 | 3336600101685 | 1   |

ALL SETS  
PAGES 120-121



251C



252C




250C

Ref.  
215

# Multi-materials

## Multi-materials drill bit cylindrical shank

The sharpened carbide tip enable to drill very hard materials such as high-strength steels (locks, safes), hollow bricks and composite materials. Do not use percussion mode for drilling.



- VERSATILITY
- SPECIAL LOCKSMITH

### Features

- Positive carbide tip with centering point.
- Angle tip 118°.
- 4 sided sharpening.

### Benefits

- Versatility of use.
- Clean cut.
- Fast penetration.

### Applications

- Drilling of composite materials.
- Safe drilling.

### AdvicesConseils

- Do not use the percussion mode.



Low density wood, Alloy steel, Ceramic tile, Slate, Composite, Brick

Shank



Cylindrical

Use



Without percussion



Non polished finish



Quality plastic pouch

| Ø                   | WL  | TL  | Ref.          | Gencod        | Qty |
|---------------------|-----|-----|---------------|---------------|-----|
| <b>Short series</b> |     |     |               |               |     |
| 3                   | 20  | 60  | 215D03        | 3336600153813 | 1   |
| 4                   | 35  | 75  | 215D04        | 3336600153820 | 1   |
| 5                   | 45  | 85  | 215D05        | 3336600153837 | 1   |
| 5.5                 | 45  | 85  | 215D05.5      | 3336600153844 | 1   |
| 6                   | 60  | 100 | 215D06        | 3336600153851 | 1   |
| 6.5                 | 60  | 100 | 215D06.5      | 3336600153868 | 1   |
| 7                   | 60  | 100 | 215D07        | 3336600153875 | 1   |
| 8                   | 80  | 120 | 215D08        | 3336600153882 | 1   |
| 9                   | 80  | 120 | 215D09        | 3336600153899 | 1   |
| 10                  | 80  | 120 | 215D10        | 3336600153905 | 1   |
| 12                  | 110 | 150 | 215D12        | 3336600153912 | 1   |
| 13                  | 110 | 150 | 215D13        | 3336600153929 | 1   |
| 14                  | 110 | 150 | 215D14        | 3336600153936 | 1   |
| 16                  | 110 | 150 | 215D16        | 3336600153950 | 1   |
| <b>L250</b>         |     |     |               |               |     |
| 6                   | 210 | 250 | 215D06L0250   | 3336600173286 | 1   |
| 6.5                 | 210 | 250 | 215D06.5L0250 | 3336600173293 | 1   |
| 8                   | 210 | 250 | 215D08L0250   | 3336600173309 | 1   |
| <b>L300</b>         |     |     |               |               |     |
| 10                  | 260 | 300 | 215D10L0300   | 3336600173415 | 1   |
| 12                  | 260 | 300 | 215D12L0300   | 3336600173422 | 1   |
| 13                  | 260 | 300 | 215D13L0300   | 3336600173439 | 1   |

ALL SETS  
PAGES 122-123





Ref.  
245

# Ceramik

## Ceramik drill bit cylindrical shank



### Features

- High strength carbide tip.
- Positive sharpened edges.
- Centering point.

### Benefits

- Specially designed for drilling tiles and ceramics.



Ceramic tile

Shank



Cylindrical

Use



Without  
percussion



Quality plastic  
pouch

| Ø   | WL  | TL  | Ref.     | Gencod        | Qty |
|-----|-----|-----|----------|---------------|-----|
| 3   | 20  | 60  | 245D03   | 3336600022058 | 1   |
| 4   | 35  | 75  | 245D04   | 3336600022065 | 1   |
| 5   | 45  | 85  | 245D05   | 3336600022072 | 1   |
| 6   | 60  | 100 | 245D06   | 3336600022089 | 1   |
| 6.5 | 60  | 100 | 245D06.5 | 3336600022713 | 1   |
| 7   | 80  | 120 | 245D07   | 3336600022720 | 1   |
| 8   | 80  | 120 | 245D08   | 3336600022096 | 1   |
| 9   | 80  | 120 | 245D09   | 3336600022737 | 1   |
| 10  | 80  | 120 | 245D10   | 3336600022102 | 1   |
| 12  | 110 | 150 | 245D12   | 3336600022744 | 1   |

ALL  
SETS  
PAGES 122-123



239B



214B

Ref.  
208

# Granit

## Hard stone and granite drill bit cylindrical shank



### Features

- High strength carbide tip.

### Benefits

- Specially designed for drilling granite and stones.



Granit, Stone, Concrete

Shank



Cylindrical



Non polished  
finish



Quality plastic  
pouch

| Ø   | WL  | TL  | Ref.     | Gencod        | Qty |
|-----|-----|-----|----------|---------------|-----|
| 3   | 20  | 60  | 208D03   | 3336600157545 | 1   |
| 4   | 35  | 75  | 208D04   | 3336600022355 | 1   |
| 5   | 45  | 85  | 208D05   | 3336600022362 | 1   |
| 5.5 | 45  | 85  | 208D05.5 | 3336600022379 | 1   |
| 6   | 60  | 100 | 208D06   | 3336600022386 | 1   |
| 6.5 | 60  | 100 | 208D06.5 | 3336600022393 | 1   |
| 7   | 60  | 100 | 208D07   | 3336600022409 | 1   |
| 8   | 80  | 120 | 208D08   | 3336600022416 | 1   |
| 9   | 80  | 120 | 208D09   | 3336600022423 | 1   |
| 10  | 80  | 120 | 208D10   | 3336600022430 | 1   |
| 12  | 110 | 150 | 208D12   | 3336600022454 | 1   |
| 14  | 110 | 150 | 208D14   | 3336600022461 | 1   |
| 16  | 110 | 150 | 208D16   | 3336600022485 | 1   |

ALL  
SETS  
PAGES 122-123



207B

Ref.  
403

## Tracing point

**Features**

- Scribing iron with hex-shank 6 mm.

**Applications**

- For an accurate tracing on sheet-metal plat.



Quality plastic pouch

| Ø | Ref. | Gencod        | Qty |
|---|------|---------------|-----|
| 6 | 403  | 3336600016477 | 1   |

Ref.  
407

## Carbide claw

**Features**

- The tool is fitted with a carbide cutting point.
- Wooden handle.

**Advices**

- Using a rule, scratch the surface of the material with the tool and break it there.



Black plastic pouch

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 407  | 3336600002326 | 1   |

Ref.  
400

# Ceratile

## Glass and tile drill bit cylindrical shank



The sharpened carbide bit enable to drill through hard and delicate materials such as glass, but also plastics and composites.



### • DRILL GLASS

#### Features

- 4 sharpened sides.
- Exclusive designed.
- Copper brazing for a better heat resistance.
- Big length.

#### Benefits

- Precise and fast penetration.
- Drilling ceramics up to class 3.
- Resistance to heating.

#### Advices

- Easy dry operation, see table of recommended speeds on our website.



Non-tempered glass, Ceramic tile, Plastic, Composite, Brick, Hollow brick, Marble

Shank



Cylindrical

Use



Without percussion



Quality plastic pouch


| Ø  | WL | TL  | Ref.   | Gencod        | Qty |
|----|----|-----|--------|---------------|-----|
| 3  | 40 | 80  | 400D03 | 3336600014466 | 1   |
| 4  | 40 | 80  | 400D04 | 3336600014473 | 1   |
| 5  | 40 | 80  | 400D05 | 3336600014480 | 1   |
| 6  | 40 | 80  | 400D06 | 3336600014497 | 1   |
| 7  | 60 | 100 | 400D07 | 3336600014503 | 1   |
| 8  | 60 | 100 | 400D08 | 3336600014510 | 1   |
| 9  | 60 | 100 | 400D09 | 3336600014527 | 1   |
| 10 | 60 | 100 | 400D10 | 3336600014534 | 1   |
| 12 | 60 | 100 | 400D12 | 3336600014541 | 1   |
| 13 | 60 | 100 | 400D13 | 3336600093546 | 1   |

ALL SETS  
PAGES 122-123




408C


#### LENGTH



#### FAST SPIRAL



#### CARBIDE TIP





Ref.  
201

**HPL**



Composit drill bit cylindrical shank

Special drill bit for external and internal cladding panels, furniture and decoration surfacing products.



• LONG LIFE

**Features**


- Carbide tip with 2 tracers.
- Crown sharpening.
- Centering tip cut at 75°.
- Glossy polished finish.

**Benefits**

- Clean hole without chip.
- Self centering point for easy starts.
- Long service life.
- Fast penetration.

**Applications**

- For the drilling of interior panels such as Corian®, wood, composite materials, plastic, or facade panels such as fibre cement, HPL, ...



Composite, Plastic, HPL, Cement fibre

Shank



Cylindrical

Use



Without percussion



Quality plastic pouch

| Ø | WL | TL  | Ref.   | Gencod        | Qty |
|---|----|-----|--------|---------------|-----|
| 5 | 45 | 85  | 201D05 | 3336600174948 | 1   |
| 6 | 60 | 100 | 201D06 | 3336600174955 | 1   |
| 8 | 80 | 120 | 201D08 | 3336600174962 | 1   |

Ref.  
781

# HSS - HEXA

## Metal drill bit quick lock shank

### Features

- Monobloc drill bit.
- Point angle 135°.
- Split point.



Alloy steel, Non-alloy steel, Cast iron, Brass,  
Hard wood, Composite

Shank



Quick Lock  
1/4" - 6.35

Drill &  
screwdriver



DIY tube

| Ø   | WL | TL | Ref.     | Gencod        | Qty |
|-----|----|----|----------|---------------|-----|
| 3   | 26 | 60 | 781D03   | 3336600166813 | 1   |
| 3.3 | 26 | 60 | 781D03.3 | 3336600166820 | 1   |
| 3.5 | 30 | 65 | 781D03.5 | 3336600166837 | 1   |
| 4   | 30 | 65 | 781D04   | 3336600166844 | 1   |
| 4.2 | 30 | 65 | 781D04.2 | 3336600166851 | 1   |
| 4.5 | 30 | 65 | 781D04.5 | 3336600166868 | 1   |
| 5   | 34 | 68 | 781D05   | 3336600166875 | 1   |
| 6   | 34 | 70 | 781D06   | 3336600166882 | 1   |
| 8   | 38 | 79 | 781D08   | 3336600166905 | 1   |

Ref.  
981

# WOOD - HEXA

## Wood drill bit quick lock shank

### Features

- Monobloc drill bit.
- 3 points.



Hard wood, Low density wood

Shank



Quick Lock  
1/4" - 6.35

Drill &  
screwdriver




DIY tube

| Ø  | WL | TL  | Ref.   | Gencod        | Qty |
|----|----|-----|--------|---------------|-----|
| 3  | 35 | 65  | 981D03 | 3336600166936 | 1   |
| 4  | 40 | 75  | 981D04 | 3336600166943 | 1   |
| 5  | 50 | 85  | 981D05 | 3336600166950 | 1   |
| 6  | 55 | 90  | 981D06 | 3336600166967 | 1   |
| 7  | 55 | 90  | 981D07 | 3336600166929 | 1   |
| 8  | 55 | 90  | 981D08 | 3336600166974 | 1   |
| 10 | 60 | 100 | 981D10 | 3336600166981 | 1   |

# CONCRETE



| Features      | Pcs | Type      | Composition                                  | Ref. | Gencod        |
|---------------|-----|-----------|--|------|---------------|
| BOOSTER PLUS  | 10  | Pouch     | L160mm Ø6(x3)-8(x3)-10(x2)-12-14mm           | 072B | 3336600104082 |
| BOOSTER PLUS  | 5   | Set       | L110mm Ø6-8 L160mm Ø6-8-10mm                 | 104B | 3336600075658 |
| BOOSTER PLUS  | 5   | Set       | L110mm Ø5(x2) L160mm Ø6 (x2)-8mm             | 115C | 3336600141278 |
| BOOSTER PLUS  | 7   | Metal set | L110mm Ø6-8-10 L160mm Ø6-8-10-12mm           | 113D | 3336600060876 |
| 4G4 DRILL BIT | 5   | Set       | L160mm Ø6-8(x2)-10-12mm                      | 112Q | 3336600197046 |
| TWISTER PLUS  | 10  | Pouch     | L110mm Ø5-6-8 L160mm Ø6(x2)-8(x2)-10-12-14mm | 116D | 3336600007406 |
| TWISTER PLUS  | 4   | Set       | L160mm Ø5-6-8-10mm                           | 100C | 3336600064881 |
| TWISTER PLUS  | 5   | Set       | L110mm Ø6-8 L160mm Ø6-8-10mm                 | 136C | 3336600054202 |
| TWISTER PLUS  | 7   | Set       | L110mm Ø5-6-8 L160mm Ø6-8-10-12mm            | 102C | 3336600064904 |
| TWISTER PLUS  | 7   | Metal set | L110mm Ø5-6-8 L160mm Ø6-8-10-12mm            | 105D | 3336600007369 |

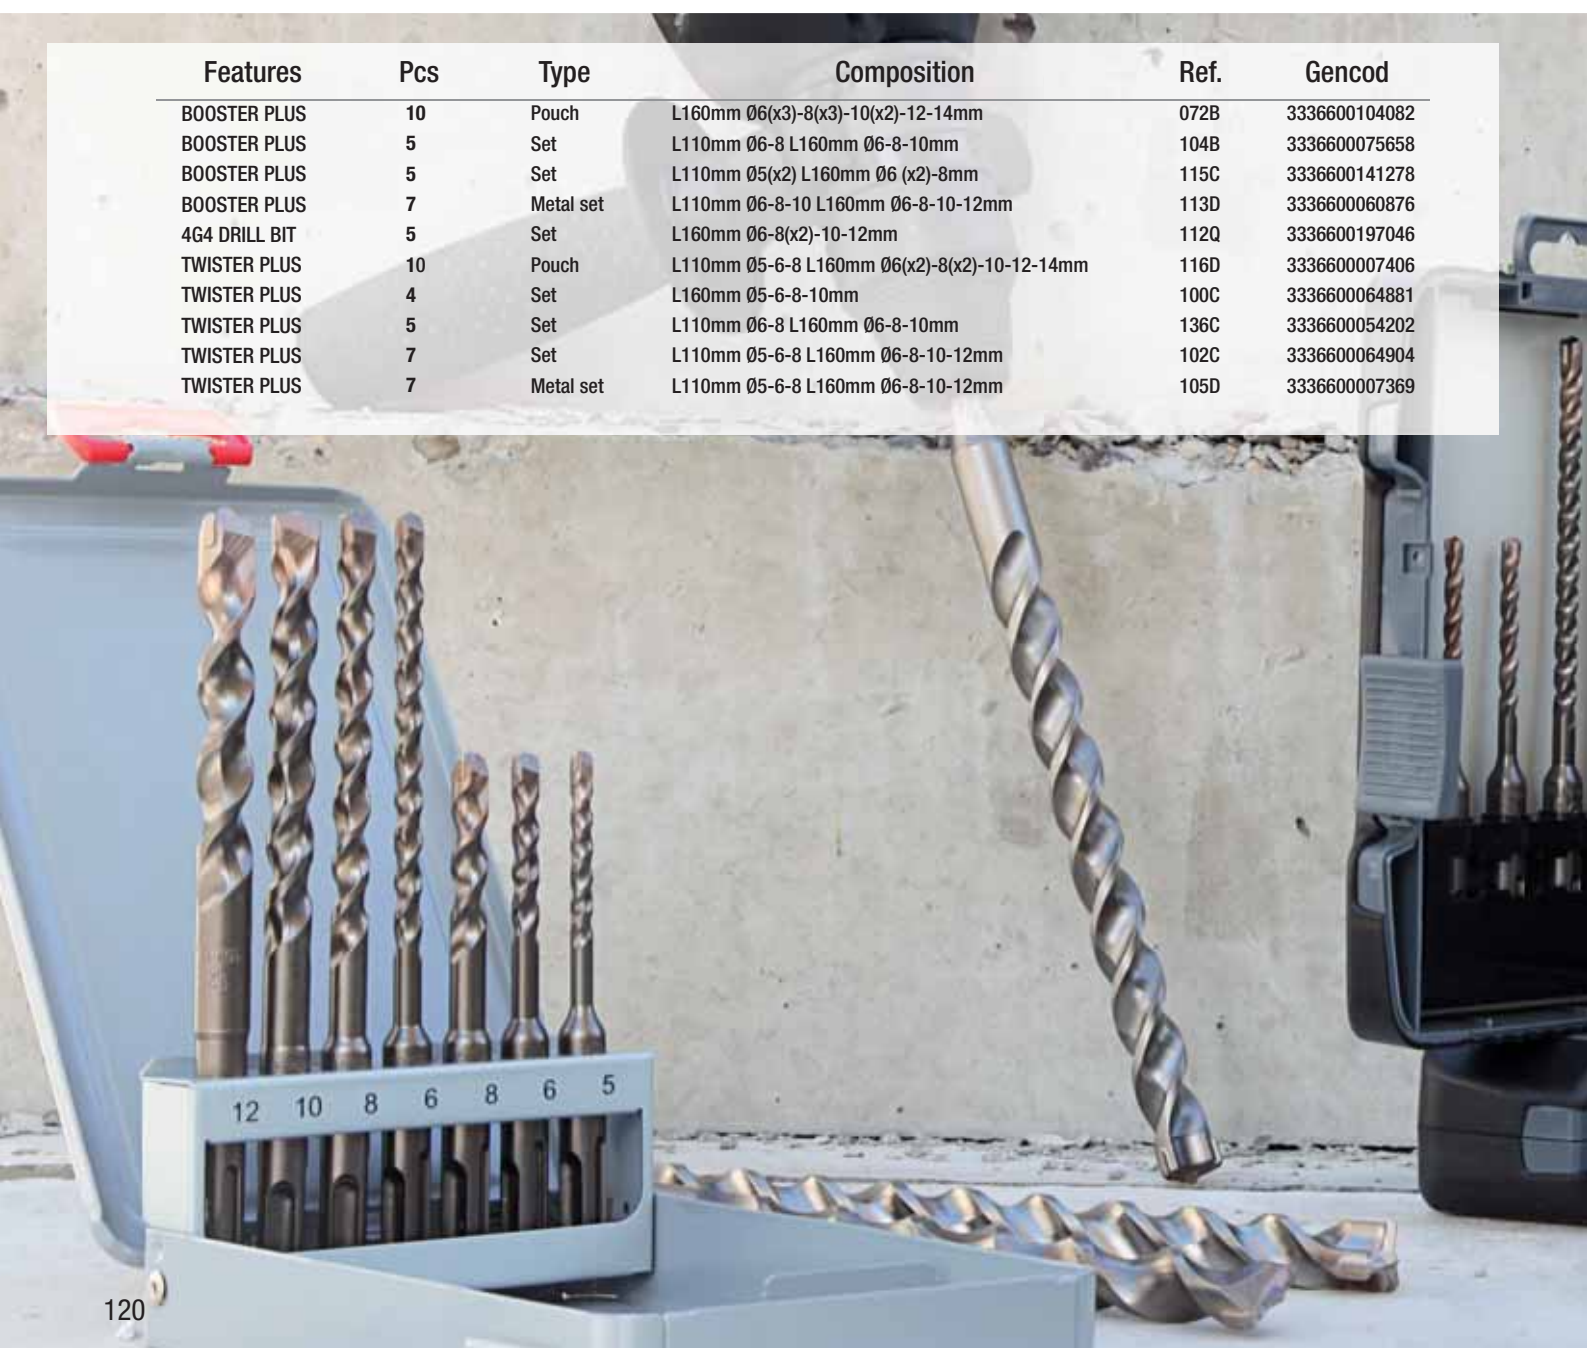





252C



251C



250C



263B



211C



256C



201C



299B



111C



315C



208D

| Features                    | Pcs | Type      | Composition  | Ref. | Gencod        |
|-----------------------------|-----|-----------|--|------|---------------|
| FLASH                       | 5   | Set       | FLASH Ø4-5-6-7-8mm   | 252C | 3336600006911 |
| FLASH                       | 5   | Set       | FLASH Ø4-5-6-8-10mm  | 251C | 3336600006904 |
| FLASH                       | 8   | Set       | FLASH Ø3-4-5-6-7-8-9-10mm  | 250C | 3336600006898 |
| OPTIMA3+                    | 5   | Solo      | OPTIMA3-3 Ø4-5-6-8-10mm  | 263B | 3336600160484 |
| MEGA                        | 5   | Solo      | MEGA Ø4-5-6-8-10mm   | 211C | 3336600064973 |
| MEGA                        | 8   | Solo      | MEGA Ø3-4-5-6-7-8-9-10mm   | 256C | 3336600083578 |
| PRO                         | 5   | Solo      | PRO Ø4-5-6-8-10mm  | 201C | 3336600006935 |
| PRO                         | 8   | Duo       | PRO Ø3-4-5-6-7-8-9-10mm  | 299B | 3336600107670 |
| PRO                         | 7   | Metal set | PRO Ø4-5-6-7-8-10-12mm   | 208D | 3336600007444 |
| SDS+ POINTED AND CHISELS    | 5   | Case      | SDS-Plus pointed chisel 14x250(x2) flat chisel 20x250(x2) 40x250mm | 111C | 3336600167469 |
| SDS MAX POINTED AND CHISELS | 5   | Case      | SDS-Max pointed chisel 18x400(x2) flat chisel 24x400(x2) 50x360mm  | 315C | 3336600180635 |





# SPECIFIC



207B



239B



214B



215C



215B



431C

| Features         | Pcs | Type | Composition   | Ref. | Gencod        |
|------------------|-----|------|---|------|---------------|
| GRANIT           | 8   | Duo  | GRANIT Ø3-4-5-6-7-8-9-10mm  | 207B | 333660075665  |
| CERAMIK          | 8   | Duo  | CERAMIK Ø3-4-5-6-7-8-9-10mm   | 239B | 333660075672  |
| CERAMIK          | 5   | Solo | CERAMIK Ø4-5-6-8-10mm   | 214B | 3336600107687 |
| MULTI-MATERIALS  | 8   | Set  | MULTI-MATERIAUX Ø3-4-5-6-7-8-9-10mm   | 215C | 3336600166783 |
| MULTI-MATERIALS  | 5   | Solo | MULTIMATERIALS Ø4-5-6-8-10mm  | 215B | 3336600166790 |
| DIAMOND CORE BIT | 1   | Kit  | Diamond core bit Ø68 + SDS-Plus core bit holder L100 + centring guide +sharpening stone | 431C | 3336600162662 |







x5

408C



x6

426C



x9

426B

| Features   | Pcs | Type  | Composition   | Ref. | Gencod        |
|------------|-----|-------|---|------|---------------|
| CERATILE   | 10  | Pouch | CERATILE Ø6 (X3)-Ø8(X2)mm                                     | 408C | 3336600178601 |
| BLUE CERAM | 10  | Pouch | BLUE-CERAM 6pcs Ø6(x2)-8(x2)mm chuck & sharpening stone       | 426C | 3336600151901 |
| BLUE CERAM | 10  | Pouch | BLUE-CERAM Ø6 (x2)-8 (x2)-10-15-20mm chuck & sharpening stone | 426B | 3336600160224 |






Compatible SDS-plus





# Drilling metal guide

| Ref.   | Designation                   | Attachment     | Origin & Standards  | Benefits  | Page     |
|--|-------------------------------|----------------|---|---|----------|
| <b>731</b><br><b>700</b>                             | 5% Cobalt                     | Straight shank | DIN 338   | <ul style="list-style-type: none"> <li>• Stainless steel special</li> <li>• Resistance to overheating</li> <li>• Long life</li> </ul>                           | 126<br>- |
| <b>702</b><br><b>703</b>                             | HSS-G3                        | Straight shank | DIN 338   | <ul style="list-style-type: none"> <li>• Ease of evacuation</li> <li>• Coating anti-heating</li> <li>• Long life</li> </ul>                                     | 128<br>- |
| <b>729</b><br><b>726</b>                             | PRO                           | Straight shank | DIN 338   | <ul style="list-style-type: none"> <li>• Speed and ease of drill hole</li> <li>• Ideal compromise for general use</li> </ul>                                    | 130<br>- |
| <b>735</b><br><b>713</b><br><b>712</b><br><b>715</b> | PRO                           | Straight shank | DIN 340<br>DIN 1897   | <ul style="list-style-type: none"> <li>• Speed and ease of drill hole</li> <li>• Ideal compromise for general use</li> </ul>                                    | 132<br>- |
| <b>750</b>   | Standard                      | Straight shank | DIN 338   | <ul style="list-style-type: none"> <li>• Occasional use</li> </ul>  | 134      |
| <b>500B</b><br><b>501B</b><br><b>502B</b>            | Step drill Tialn<br>5% cobalt | Flat           |                        | <ul style="list-style-type: none"> <li>• Drilling Ø4 to 30</li> <li>• TIALN coating = long life</li> </ul>  | 136<br>- |
| <b>511B</b><br><b>512B</b><br><b>513B</b>            | Step drill                    | Straight shank |                        | <ul style="list-style-type: none"> <li>• Drilling Ø4 to 30</li> <li>• HSS fully ground</li> </ul>   | 138<br>- |
| <b>867</b>   | Gun Tap                       | Square         | DIN 352<br>DIN 376  | <ul style="list-style-type: none"> <li>• Tapping in one step</li> </ul>   | 140      |
| <b>504</b>   | Countersink                   | Straight shank | DIN 335   | <ul style="list-style-type: none"> <li>• Chamfer and deburring</li> <li>• Stainless steel drilling</li> <li>• Long life</li> </ul>                              | 141      |
| <b>D2409</b><br><b>D2418</b>                         | TCT HSS drill bit             | Straight shank | DIN 338<br>DIN 340<br> | <ul style="list-style-type: none"> <li>• Precision mechanics</li> <li>• Use on column drills</li> <li>• Drilling of steels up to 2100 Nm<sup>2</sup></li> </ul> | 142<br>- |
| <b>781</b>   | HSS - HEXA                    | Quick lock     | DIN 338   | <ul style="list-style-type: none"> <li>• Screwdriver special</li> </ul>   | 119      |





Ref.  
731

# Cobalt 5%

Fully ground HSS drill bit 5% cobalt HSS-E.

The addition of cobalt in the composition of the steel provides better resistance to heating and increases resistance enable drilling stainless steel and alloyed steels (up to 1200N/mm<sup>2</sup>).



## • HEAT-RESISTANT

### Features

- Fully ground 5% cobalt.
- Split point 135°.
- DIN 338.
- N type flute.
- Diameter tolerance h8.

### Benefits

- Drilling in stainless steel.
- High temperature resistance.
- Accuracy when starting drilling.



Stainless steel, Alloy steel, Non-alloy steel,  
Cast iron, Cast iron, spheroidal

Shank



Cylindrical

Angle



Sharpening



| Ø                               | WL  | TL  | Ref.     | Gencod        | Qty |
|---------------------------------|-----|-----|----------|---------------|-----|
| <b>Plastic pouch of 1 Piece</b> |     |     |          |               |     |
| 2                               | 24  | 49  | 731D02   | 3336600021563 | 1   |
| 2.5                             | 30  | 57  | 731D02.5 | 3336600021570 | 1   |
| 3                               | 33  | 61  | 731D03   | 3336600021587 | 1   |
| 3.2                             | 36  | 65  | 731D03.2 | 3336600021600 | 1   |
| 3.5                             | 39  | 70  | 731D03.5 | 3336600021631 | 1   |
| 4                               | 43  | 75  | 731D04   | 3336600021662 | 1   |
| 4.2                             | 43  | 75  | 731D04.2 | 3336600021686 | 1   |
| 4.5                             | 47  | 80  | 731D04.5 | 3336600021716 | 1   |
| 5                               | 52  | 86  | 731D05   | 3336600021761 | 1   |
| 5.2                             | 52  | 86  | 731D05.2 | 3336600021785 | 1   |
| 5.5                             | 57  | 93  | 731D05.5 | 3336600021815 | 1   |
| 6                               | 57  | 93  | 731D06   | 3336600021846 | 1   |
| 6.2                             | 63  | 101 | 731D06.2 | 3336600021853 | 1   |
| 6.5                             | 69  | 109 | 731D06.5 | 3336600021860 | 1   |
| 7                               | 69  | 109 | 731D07   | 3336600021884 | 1   |
| 7.5                             | 75  | 117 | 731D07.5 | 3336600021891 | 1   |
| 8                               | 75  | 117 | 731D08   | 3336600021907 | 1   |
| 8.5                             | 81  | 125 | 731D08.5 | 3336600021921 | 1   |
| 9                               | 81  | 125 | 731D09   | 3336600021938 | 1   |
| 9.5                             | 81  | 125 | 731D09.5 | 3336600021952 | 1   |
| 10                              | 87  | 133 | 731D10   | 3336600021969 | 1   |
| 10.5                            | 87  | 133 | 731D10.5 | 3336600021976 | 1   |
| 11                              | 94  | 142 | 731D11   | 3336600021983 | 1   |
| 11.5                            | 94  | 142 | 731D11.5 | 3336600021990 | 1   |
| 12                              | 101 | 151 | 731D12   | 3336600022003 | 1   |
| 12.5                            | 101 | 151 | 731D12.5 | 3336600022010 | 1   |
| 13                              | 101 | 151 | 731D13   | 3336600022027 | 1   |



Quality plastic pouch



Ref.  
700

# Fully ground HSS drill bit 5% cobalt HSS-E pack 5 or 10

The addition of cobalt in the composition of the steel provides better resistance to heating and increases resistance enable drilling stainless steel and alloyed steels (up to 1200N/mm<sup>2</sup>).



| Ø                              | WL  | TL  | Ref.     | Gencod         | Qty |
|--------------------------------|-----|-----|----------|----------------|-----|
| <b>Quadropack of 10 Pieces</b> |     |     |          |                |     |
| 2                              | 24  | 49  | 700D02   | 3336600016644  | 1   |
| 2.5                            | 30  | 57  | 700D02.5 | 3336600016651  | 1   |
| 3                              | 33  | 61  | 700D03   | 3336600016668  | 1   |
| 3.2                            | 36  | 65  | 700D03.2 | 3336600016682  | 1   |
| 3.3                            | 36  | 65  | 700D03.3 | 3336600016699  | 1   |
| 3.5                            | 39  | 70  | 700D03.5 | 3336600016712  | 1   |
| 4                              | 43  | 75  | 700D04   | 3336600016743  | 1   |
| 4.2                            | 43  | 75  | 700D04.2 | 3336600016767  | 1   |
| 4.5                            | 47  | 80  | 700D04.5 | 3336600016798  | 1   |
| 4.8                            | 52  | 86  | 700D04.8 | 3336600016828  | 1   |
| 5                              | 52  | 86  | 700D05   | 3336600016842  | 1   |
| 5.2                            | 52  | 86  | 700D05.2 | 3336600016866  | 1   |
| 5.5                            | 57  | 93  | 700D05.5 | 3336600016897  | 1   |
| 6                              | 57  | 93  | 700D06   | 3336600016927  | 1   |
| 6.2                            | 63  | 101 | 700D06.2 | 3336600016934  | 1   |
| 6.5                            | 63  | 101 | 700D06.5 | 3336600016941  | 1   |
| 6.8                            | 69  | 109 | 700D06.8 | 33366000167285 | 1   |
| 7                              | 69  | 109 | 700D07   | 3336600016965  | 1   |
| 7.5                            | 75  | 117 | 700D07.5 | 3336600016972  | 1   |
| 8                              | 75  | 117 | 700D08   | 3336600016989  | 1   |
| 8.5                            | 81  | 125 | 700D08.5 | 3336600016996  | 1   |
| 9                              | 81  | 125 | 700D09   | 3336600017009  | 1   |
| 9.5                            | 81  | 125 | 700D09.5 | 3336600017023  | 1   |
| 10                             | 87  | 133 | 700D10   | 3336600017030  | 1   |
| <b>Quadropack of 5 Pieces</b>  |     |     |          |                |     |
| 10.5                           | 87  | 133 | 700D10.5 | 3336600017047  | 1   |
| 11                             | 94  | 142 | 700D11   | 3336600017054  | 1   |
| 11.5                           | 94  | 142 | 700D11.5 | 3336600017061  | 1   |
| 12                             | 101 | 151 | 700D12   | 3336600017078  | 1   |
| 12.5                           | 101 | 151 | 700D12.5 | 3336600017085  | 1   |
| 13                             | 101 | 151 | 700D13   | 3336600017092  | 1   |



Quadropack

ALL  
SETS  
PAGES 146-147



x19

708D



x25

707D



x6

706C



x10

720C



Ref.  
702

# Multi-layers coating G3

## Fully ground HSS drill bit TiAlN coating

HSS G3 drill bit has a TiAlN coating that acts as a thermal barrier and reduce friction to facilitate chip evacuation. Drilling non-alloy and alloy steels (up to 1100N/mm<sup>2</sup>), cast iron, aluminium.






### • HIGH CUTTING SPEED

#### Features

- Multi-layers TiAlN coating.
- Fully ground HSS drill bit.
- Split point 135°.
- DIN 338 - S type flute.
- Diameter tolerance h8.

#### Benefits

- Priming accuracy at start-up.
- Multiple coating acts as a thermal barrier against heating and allows a longer lifetime.
- The coating reduce friction, facilitate dust removal and increases cutting speed.

|   |  |   |
|---|--|---|
| Shank<br><br>Ø Max 12.7<br>Cylindrical | Angle<br> | Sharpening<br> |
|---|--|---|



Alloy steel, Non-alloy steel,  
Cast iron, Cast iron, spheroidal



DIY tube

| Ø                              | WL  | TL  | Ref.     | Gencod        | Qty |
|--------------------------------|-----|-----|----------|---------------|-----|
| <b>Plastic tube of 2 piece</b> |     |     |          |               |     |
| 1                              | 12  | 34  | 702D01   | 3336600154773 | 1   |
| 1.5                            | 18  | 40  | 702D01.5 | 3336600154780 | 1   |
| 2                              | 24  | 49  | 702D02   | 3336600154797 | 1   |
| 2.5                            | 30  | 57  | 702D02.5 | 3336600154803 | 1   |
| 3                              | 36  | 65  | 702D03   | 3336600154810 | 1   |
| 3.2                            | 36  | 65  | 702D03.2 | 3336600154827 | 1   |
| 3.3                            | 36  | 65  | 702D03.3 | 3336600157828 | 1   |
| 3.5                            | 39  | 70  | 702D03.5 | 3336600154834 | 1   |
| 4                              | 43  | 75  | 702D04   | 3336600154841 | 1   |
| 4.2                            | 43  | 75  | 702D04.2 | 3336600154858 | 1   |
| 4.5                            | 47  | 80  | 702D04.5 | 3336600154865 | 1   |
| 4.8                            | 52  | 86  | 702D04.8 | 3336600154872 | 1   |
| 5                              | 52  | 86  | 702D05   | 3336600154889 | 1   |
| <b>Plastic tube of 1 piece</b> |     |     |          |               |     |
| 5.2                            | 52  | 86  | 702D05.2 | 3336600154896 | 1   |
| 5.5                            | 57  | 93  | 702D05.5 | 3336600154902 | 1   |
| 6                              | 57  | 93  | 702D06   | 3336600154919 | 1   |
| 6.2                            | 63  | 101 | 702D06.2 | 3336600154926 | 1   |
| 6.5                            | 63  | 101 | 702D06.5 | 3336600154933 | 1   |
| 6.8                            | 69  | 109 | 702D06.8 | 3336600154940 | 1   |
| 7                              | 69  | 109 | 702D07   | 3336600154957 | 1   |
| 7.5                            | 69  | 109 | 702D07.5 | 3336600154964 | 1   |
| 8                              | 75  | 117 | 702D08   | 3336600154971 | 1   |
| 8.5                            | 75  | 117 | 702D08.5 | 3336600154988 | 1   |
| 9                              | 81  | 125 | 702D09   | 3336600154995 | 1   |
| 9.5                            | 81  | 125 | 702D09.5 | 3336600155008 | 1   |
| 10                             | 87  | 133 | 702D10   | 3336600155015 | 1   |
| 10.2                           | 87  | 133 | 702D10.2 | 3336600157835 | 1   |
| 10.5                           | 87  | 133 | 702D10.5 | 3336600155022 | 1   |
| 11                             | 94  | 142 | 702D11   | 3336600155039 | 1   |
| 11.5                           | 94  | 142 | 702D11.5 | 3336600155046 | 1   |
| 12                             | 101 | 151 | 702D12   | 3336600155053 | 1   |
| 12.5                           | 101 | 151 | 702D12.5 | 3336600155060 | 1   |
| 13                             | 101 | 151 | 702D13   | 3336600155077 | 1   |
| 14                             | 108 | 160 | 702D14   | 3336600164529 | 1   |
| 15                             | 114 | 169 | 702D15   | 3336600164536 | 1   |
| 16                             | 120 | 178 | 702D16   | 3336600164543 | 1   |
| 17                             | 125 | 184 | 702D17   | 3336600179073 | 1   |
| 18                             | 130 | 191 | 702D18   | 3336600179080 | 1   |
| 19                             | 135 | 198 | 702D19   | 3336600179097 | 1   |
| 20                             | 140 | 205 | 702D20   | 3336600179103 | 1   |

Ref.  
**703**

# Fully ground HSS drill bit TiAlN coating pack 2, 5 or 10

HSS G3 drill bit has a TiAlN coating that acts as a thermal barrier and reduce friction to facilitate chip evacuation. Drilling non-alloy and alloy steels (up to 1100N/mm<sup>2</sup>), cast iron, aluminium.



| Ø                              | WL | TL | Ref.     | Gencod        | Qty |
|--------------------------------|----|----|----------|---------------|-----|
| <b>Quadropack of 10 Pieces</b> |    |    |          |               |     |
| 1                              | 12 | 34 | 703D01   | 3336600157903 | 1   |
| 1.2                            | 16 | 38 | 703D01.2 | 3336600177024 | 1   |
| 1.4                            | 18 | 40 | 703D01.4 | 3336600177048 | 1   |
| 1.5                            | 18 | 40 | 703D01.5 | 3336600157910 | 1   |
| 1.6                            | 20 | 43 | 703D01.6 | 3336600177055 | 1   |
| 1.8                            | 22 | 46 | 703D01.8 | 3336600177062 | 1   |
| 2                              | 24 | 49 | 703D02   | 3336600157927 | 1   |
| 2.3                            | 27 | 53 | 703D02.3 | 3336600177079 | 1   |
| 2.4                            | 30 | 57 | 703D02.4 | 3336600177086 | 1   |
| 2.5                            | 30 | 57 | 703D02.5 | 3336600157934 | 1   |
| 2.6                            | 30 | 57 | 703D02.6 | 3336600177093 | 1   |
| 2.7                            | 30 | 61 | 703D02.7 | 3336600177109 | 1   |
| 2.9                            | 30 | 61 | 703D02.9 | 3336600177116 | 1   |
| 3                              | 36 | 65 | 703D03   | 3336600157941 | 1   |
| 3.1                            | 36 | 65 | 703D03.1 | 3336600177123 | 1   |
| 3.2                            | 36 | 65 | 703D03.2 | 3336600157958 | 1   |
| 3.3                            | 36 | 65 | 703D03.3 | 3336600157965 | 1   |
| 3.4                            | 39 | 70 | 703D03.4 | 3336600177130 | 1   |
| 3.5                            | 39 | 70 | 703D03.5 | 3336600157972 | 1   |
| 3.6                            | 39 | 70 | 703D03.6 | 3336600177147 | 1   |
| 3.7                            | 39 | 70 | 703D03.7 | 3336600177154 | 1   |
| 3.8                            | 43 | 75 | 703D03.8 | 3336600177161 | 1   |
| 4                              | 43 | 75 | 703D04   | 3336600157989 | 1   |
| 4.1                            | 43 | 75 | 703D04.1 | 3336600177178 | 1   |
| 4.2                            | 43 | 75 | 703D04.2 | 3336600157996 | 1   |
| 4.3                            | 47 | 80 | 703D04.3 | 3336600177185 | 1   |
| 4.5                            | 47 | 80 | 703D04.5 | 3336600158009 | 1   |
| 4.6                            | 47 | 80 | 703D04.6 | 3336600177192 | 1   |
| 4.7                            | 47 | 80 | 703D04.7 | 3336600177208 | 1   |
| 4.8                            | 52 | 86 | 703D04.8 | 3336600158016 | 1   |
| 4.9                            | 52 | 86 | 703D04.9 | 3336600177215 | 1   |
| 5                              | 52 | 86 | 703D05   | 3336600158023 | 1   |
| 5.1                            | 52 | 86 | 703D05.1 | 3336600177222 | 1   |
| 5.2                            | 52 | 86 | 703D05.2 | 3336600158030 | 1   |
| 5.3                            | 52 | 86 | 703D05.3 | 3336600177239 | 1   |

| Ø                             | WL  | TL  | Ref.     | Gencod        | Qty |
|-------------------------------|-----|-----|----------|---------------|-----|
| 5.5                           | 57  | 93  | 703D05.5 | 3336600158047 | 1   |
| 5.8                           | 57  | 93  | 703D05.8 | 3336600177246 | 1   |
| 6                             | 57  | 93  | 703D06   | 3336600158054 | 1   |
| 6.1                           | 63  | 101 | 703D06.1 | 3336600177253 | 1   |
| 6.2                           | 63  | 101 | 703D06.2 | 3336600158061 | 1   |
| 6.5                           | 63  | 101 | 703D06.5 | 3336600158078 | 1   |
| 6.7                           | 63  | 101 | 703D06.7 | 3336600177260 | 1   |
| 6.8                           | 69  | 109 | 703D06.8 | 3336600158085 | 1   |
| 7                             | 69  | 109 | 703D07   | 3336600158092 | 1   |
| 7.3                           | 69  | 109 | 703D07.3 | 3336600177277 | 1   |
| 7.4                           | 69  | 109 | 703D07.4 | 3336600177284 | 1   |
| 7.5                           | 69  | 109 | 703D07.5 | 3336600158108 | 1   |
| 8                             | 75  | 117 | 703D08   | 3336600158115 | 1   |
| 8.2                           | 75  | 117 | 703D08.2 | 3336600177291 | 1   |
| 8.5                           | 75  | 117 | 703D08.5 | 3336600158122 | 1   |
| 8.7                           | 81  | 125 | 703D08.7 | 3336600177307 | 1   |
| 9                             | 81  | 125 | 703D09   | 3336600158139 | 1   |
| 9.5                           | 81  | 125 | 703D09.5 | 3336600158146 | 1   |
| 10                            | 87  | 133 | 703D10   | 3336600158153 | 1   |
| <b>Quadropack of 5 Pieces</b> |     |     |          |               |     |
| 10.2                          | 87  | 133 | 703D10.2 | 3336600177314 | 1   |
| 10.5                          | 87  | 133 | 703D10.5 | 3336600158160 | 1   |
| 11                            | 94  | 142 | 703D11   | 3336600158177 | 1   |
| 11.5                          | 94  | 142 | 703D11.5 | 3336600158184 | 1   |
| 12                            | 101 | 152 | 703D12   | 3336600158191 | 1   |
| 12.5                          | 101 | 152 | 703D12.5 | 3336600158207 | 1   |
| 13                            | 101 | 151 | 703D13   | 3336600158214 | 1   |
| 13.5                          | 108 | 160 | 703D13.5 | 3336600181106 | 1   |
| <b>Quadropack of 2 Pieces</b> |     |     |          |               |     |
| 14                            | 108 | 160 | 703D14   | 3336600177321 | 1   |
| 14.5                          | 114 | 169 | 703D14.5 | 3336600181113 | 1   |
| 15                            | 114 | 169 | 703D15   | 3336600177338 | 1   |
| 15.5                          | 120 | 178 | 703D15.5 | 3336600181120 | 1   |
| 16                            | 120 | 178 | 703D16   | 3336600177345 | 1   |



ALL  
**SETS**  
PAGES 146-147





Ref.  
729

# HSS PRO

## Fully ground HSS drill bit

Multi-purpose HSS drill bit for general use. Drills through unalloyed and alloyed steels up to 900N/mm<sup>2</sup>.



Alloy steel, Non-alloy steel,  
Cast iron, Cast iron, spheroidal



### • VERSATILITY

#### Features

- Fully ground HSS drill bit.
- Split point 118°.
- DIN 338 - N type flute.
- Diameter tolerance h8.

#### Benefits

- Priming accuracy at start-up.
- Fast drilling.

Shank



Cylindrical

Angle



Sharpening



| Ø                                | WL  | TL  | Ref.     | Gencod        | Qty |
|----------------------------------|-----|-----|----------|---------------|-----|
| <b>Plastic pouch of 2 Pieces</b> |     |     |          |               |     |
| 1                                | 12  | 34  | 729D01   | 3336600007734 | 1   |
| 1.5                              | 18  | 40  | 729D01.5 | 3336600007741 | 1   |
| 2                                | 24  | 49  | 729D02   | 3336600007758 | 1   |
| 2.5                              | 30  | 57  | 729D02.5 | 3336600007765 | 1   |
| 3                                | 33  | 61  | 729D03   | 3336600007772 | 1   |
| 3.2                              | 36  | 65  | 729D03.2 | 3336600007789 | 1   |
| 3.3                              | 36  | 65  | 729D03.3 | 3336600012325 | 1   |
| 3.5                              | 39  | 70  | 729D03.5 | 3336600007796 | 1   |
| 4                                | 43  | 75  | 729D04   | 3336600007802 | 1   |
| 4.2                              | 43  | 75  | 729D04.2 | 3336600007819 | 1   |
| 4.3                              | 47  | 80  | 729D04.3 | 3336600012356 | 1   |
| 4.5                              | 47  | 80  | 729D04.5 | 3336600007826 | 1   |
| 5                                | 52  | 86  | 729D05   | 3336600007833 | 1   |
| <b>Plastic pouch of 1 Piece</b>  |     |     |          |               |     |
| 5.2                              | 52  | 86  | 729D05.2 | 3336600007840 | 1   |
| 5.5                              | 57  | 93  | 729D05.5 | 3336600007857 | 1   |
| 6                                | 57  | 93  | 729D06   | 3336600007864 | 1   |
| 6.2                              | 63  | 101 | 729D06.2 | 3336600012370 | 1   |
| 6.5                              | 63  | 101 | 729D06.5 | 3336600007871 | 1   |
| 7                                | 69  | 109 | 729D07   | 3336600007888 | 1   |
| 7.5                              | 69  | 109 | 729D07.5 | 3336600007895 | 1   |
| 8                                | 75  | 117 | 729D08   | 3336600007901 | 1   |
| 8.5                              | 75  | 117 | 729D08.5 | 3336600007918 | 1   |
| 9                                | 81  | 125 | 729D09   | 3336600007925 | 1   |
| 9.5                              | 81  | 125 | 729D09.5 | 3336600007932 | 1   |
| 10                               | 87  | 133 | 729D10   | 3336600007949 | 1   |
| 10.5                             | 87  | 133 | 729D10.5 | 3336600007956 | 1   |
| 11                               | 94  | 142 | 729D11   | 3336600007963 | 1   |
| 11.5                             | 94  | 142 | 729D11.5 | 3336600007970 | 1   |
| 12                               | 101 | 151 | 729D12   | 3336600007987 | 1   |
| 12.5                             | 101 | 151 | 729D12.5 | 3336600007994 | 1   |
| 13                               | 101 | 151 | 729D13   | 3336600008007 | 1   |
| 13.5                             | 108 | 160 | 729D13.5 | 3336600009547 | 1   |
| 14                               | 108 | 160 | 729D14   | 3336600009554 | 1   |
| 14.5                             | 114 | 169 | 729D14.5 | 3336600009561 | 1   |
| 15                               | 114 | 169 | 729D15   | 3336600009578 | 1   |
| 15.5                             | 120 | 178 | 729D15.5 | 3336600009585 | 1   |
| 16                               | 120 | 178 | 729D16   | 3336600009592 | 1   |
| 16.5                             | 125 | 184 | 729D16.5 | 3336600009608 | 1   |
| 17                               | 125 | 184 | 729D17   | 3336600009615 | 1   |
| 18                               | 130 | 191 | 729D18   | 3336600009639 | 1   |
| 19                               | 135 | 198 | 729D19   | 3336600009653 | 1   |
| 20                               | 140 | 205 | 729D20   | 3336600009677 | 1   |



Quality plastic pouch

Ref.  
**726**

# Fully ground HSS drill bit pack 2, 5 or 10

Multi-purpose HSS drill bit for general use. Drills through unalloyed and alloyed steels up to 900N/mm<sup>2</sup>.



| Ø                              | WL | TL  | Ref.     | Gencod        | Qty | Ø                             | WL  | TL  | Ref.     | Gencod        | Qty |  |  |
|--------------------------------|----|-----|----------|---------------|-----|-------------------------------|-----|-----|----------|---------------|-----|--|--|
| <b>Quadropack of 10 Pieces</b> |    |     |          |               |     |                               |     |     |          |               |     |  |  |
| 0.8                            | 10 | 30  | 726D0.8  | 3336600022034 | 1   | 6.6                           | 63  | 101 | 726D06.6 | 3336600010970 | 1   |  |  |
| 1                              | 12 | 34  | 726D01   | 3336600010413 | 1   | 6.7                           | 63  | 101 | 726D06.7 | 3336600010987 | 1   |  |  |
| 1.1                            | 14 | 36  | 726D01.1 | 3336600010420 | 1   | 6.8                           | 69  | 109 | 726D06.8 | 3336600010994 | 1   |  |  |
| 1.2                            | 16 | 38  | 726D01.2 | 3336600010437 | 1   | 6.9                           | 69  | 109 | 726D06.9 | 3336600011007 | 1   |  |  |
| 1.3                            | 16 | 38  | 726D01.3 | 3336600010444 | 1   | 7                             | 69  | 109 | 726D07   | 3336600011014 | 1   |  |  |
| 1.4                            | 18 | 40  | 726D01.4 | 3336600010451 | 1   | 7.1                           | 69  | 109 | 726D07.1 | 3336600011021 | 1   |  |  |
| 1.5                            | 18 | 40  | 726D01.5 | 3336600010468 | 1   | 7.2                           | 69  | 109 | 726D07.2 | 3336600011038 | 1   |  |  |
| 1.6                            | 20 | 43  | 726D01.6 | 3336600010475 | 1   | 7.3                           | 69  | 109 | 726D07.3 | 3336600011045 | 1   |  |  |
| 1.7                            | 20 | 43  | 726D01.7 | 3336600010482 | 1   | 7.4                           | 69  | 109 | 726D07.4 | 3336600011052 | 1   |  |  |
| 1.8                            | 22 | 46  | 726D01.8 | 3336600010499 | 1   | 7.5                           | 69  | 109 | 726D07.5 | 3336600011069 | 1   |  |  |
| 1.9                            | 22 | 46  | 726D01.9 | 3336600010505 | 1   | 7.6                           | 75  | 117 | 726D07.6 | 3336600011076 | 1   |  |  |
| 2                              | 24 | 49  | 726D02   | 3336600010512 | 1   | 7.7                           | 75  | 117 | 726D07.7 | 3336600011151 | 1   |  |  |
| 2.1                            | 24 | 49  | 726D02.1 | 3336600010529 | 1   | 7.8                           | 75  | 117 | 726D07.8 | 3336600011168 | 1   |  |  |
| 2.2                            | 27 | 53  | 726D02.2 | 3336600010536 | 1   | 7.9                           | 75  | 117 | 726D07.9 | 3336600011175 | 1   |  |  |
| 2.3                            | 27 | 53  | 726D02.3 | 3336600010543 | 1   | 8                             | 75  | 117 | 726D08   | 3336600011182 | 1   |  |  |
| 2.4                            | 30 | 57  | 726D02.4 | 3336600010550 | 1   | 8.1                           | 75  | 117 | 726D08.1 | 3336600011199 | 1   |  |  |
| 2.5                            | 30 | 57  | 726D02.5 | 3336600010567 | 1   | 8.2                           | 75  | 117 | 726D08.2 | 3336600011205 | 1   |  |  |
| 2.6                            | 30 | 57  | 726D02.6 | 3336600010574 | 1   | 8.3                           | 75  | 117 | 726D08.3 | 3336600011212 | 1   |  |  |
| 2.7                            | 33 | 61  | 726D02.7 | 3336600010581 | 1   | 8.4                           | 75  | 117 | 726D08.4 | 3336600011229 | 1   |  |  |
| 2.8                            | 33 | 61  | 726D02.8 | 3336600010598 | 1   | 8.5                           | 75  | 117 | 726D08.5 | 3336600011236 | 1   |  |  |
| 2.9                            | 33 | 61  | 726D02.9 | 3336600010604 | 1   | 8.6                           | 81  | 125 | 726D08.6 | 3336600011243 | 1   |  |  |
| 3                              | 33 | 61  | 726D03   | 3336600010611 | 1   | 8.7                           | 81  | 125 | 726D08.7 | 3336600011250 | 1   |  |  |
| 3.1                            | 36 | 65  | 726D03.1 | 3336600010628 | 1   | 8.8                           | 81  | 125 | 726D08.8 | 3336600011267 | 1   |  |  |
| 3.2                            | 36 | 65  | 726D03.2 | 3336600010635 | 1   | 8.9                           | 81  | 125 | 726D08.9 | 3336600011274 | 1   |  |  |
| 3.3                            | 36 | 65  | 726D03.3 | 3336600010642 | 1   | 9                             | 81  | 125 | 726D09   | 3336600011281 | 1   |  |  |
| 3.4                            | 39 | 70  | 726D03.4 | 3336600010659 | 1   | 9.1                           | 81  | 125 | 726D09.1 | 3336600011298 | 1   |  |  |
| 3.5                            | 39 | 70  | 726D03.5 | 3336600010666 | 1   | 9.2                           | 81  | 125 | 726D09.2 | 3336600011304 | 1   |  |  |
| 3.6                            | 39 | 70  | 726D03.6 | 3336600010673 | 1   | 9.3                           | 81  | 125 | 726D09.3 | 3336600011311 | 1   |  |  |
| 3.7                            | 39 | 70  | 726D03.7 | 3336600010680 | 1   | 9.4                           | 81  | 125 | 726D09.4 | 3336600011328 | 1   |  |  |
| 3.8                            | 43 | 75  | 726D03.8 | 3336600010697 | 1   | 9.5                           | 81  | 125 | 726D09.5 | 3336600011335 | 1   |  |  |
| 3.9                            | 43 | 75  | 726D03.9 | 3336600010703 | 1   | 9.6                           | 87  | 133 | 726D09.6 | 3336600011342 | 1   |  |  |
| 4                              | 43 | 75  | 726D04   | 3336600010710 | 1   | 9.7                           | 87  | 133 | 726D09.7 | 3336600011359 | 1   |  |  |
| 4.1                            | 43 | 75  | 726D04.1 | 3336600010727 | 1   | 9.8                           | 87  | 133 | 726D09.8 | 3336600011366 | 1   |  |  |
| 4.2                            | 43 | 75  | 726D04.2 | 3336600010734 | 1   | 9.9                           | 87  | 133 | 726D09.9 | 3336600011373 | 1   |  |  |
| 4.3                            | 47 | 80  | 726D04.3 | 3336600010741 | 1   | 10                            | 87  | 133 | 726D10   | 3336600011380 | 1   |  |  |
| 4.4                            | 47 | 80  | 726D04.4 | 3336600010758 | 1   | <b>Quadropack of 5 Pieces</b> |     |     |          |               |     |  |  |
| 4.5                            | 47 | 80  | 726D04.5 | 3336600010765 | 1   | 10.5                          | 87  | 133 | 726D10.5 | 3336600011397 | 1   |  |  |
| 4.6                            | 47 | 80  | 726D04.6 | 3336600010772 | 1   | 11                            | 94  | 142 | 726D11   | 3336600011403 | 1   |  |  |
| 4.7                            | 47 | 80  | 726D04.7 | 3336600010789 | 1   | 11.5                          | 94  | 142 | 726D11.5 | 3336600011410 | 1   |  |  |
| 4.8                            | 52 | 86  | 726D04.8 | 3336600010796 | 1   | 12                            | 101 | 151 | 726D12   | 3336600011427 | 1   |  |  |
| 4.9                            | 52 | 86  | 726D04.9 | 3336600010802 | 1   | 12.5                          | 101 | 151 | 726D12.5 | 3336600011434 | 1   |  |  |
| 5                              | 52 | 86  | 726D05   | 3336600010819 | 1   | 13                            | 101 | 151 | 726D13   | 3336600011441 | 1   |  |  |
| 5.1                            | 52 | 86  | 726D05.1 | 3336600010826 | 1   | 13.5                          | 108 | 160 | 726D13.5 | 3336600011458 | 1   |  |  |
| 5.2                            | 52 | 86  | 726D05.2 | 3336600010833 | 1   | <b>Quadropack of 2 Pieces</b> |     |     |          |               |     |  |  |
| 5.3                            | 52 | 86  | 726D05.3 | 3336600010840 | 1   | 14                            | 108 | 160 | 726D14   | 3336600011465 | 1   |  |  |
| 5.4                            | 57 | 93  | 726D05.4 | 3336600010857 | 1   | 14.5                          | 114 | 169 | 726D14.5 | 3336600011472 | 1   |  |  |
| 5.5                            | 57 | 93  | 726D05.5 | 3336600010864 | 1   | 15                            | 114 | 169 | 726D15   | 3336600011489 | 1   |  |  |
| 5.6                            | 57 | 93  | 726D05.6 | 3336600010871 | 1   | 15.5                          | 120 | 178 | 726D15.5 | 3336600011496 | 1   |  |  |
| 5.7                            | 57 | 93  | 726D05.7 | 3336600010888 | 1   | 16                            | 120 | 178 | 726D16   | 3336600011502 | 1   |  |  |
| 5.8                            | 57 | 93  | 726D05.8 | 3336600010895 | 1   | 16.5                          | 125 | 184 | 726D16.5 | 3336600011519 | 1   |  |  |
| 5.9                            | 57 | 93  | 726D05.9 | 3336600010901 | 1   | 17                            | 125 | 184 | 726D17   | 3336600011526 | 1   |  |  |
| 6                              | 57 | 93  | 726D06   | 3336600010918 | 1   | 17.5                          | 130 | 191 | 726D17.5 | 3336600011533 | 1   |  |  |
| 6.1                            | 63 | 101 | 726D06.1 | 3336600010925 | 1   | 18                            | 130 | 191 | 726D18   | 3336600011540 | 1   |  |  |
| 6.2                            | 63 | 101 | 726D06.2 | 3336600010932 | 1   | 18.5                          | 135 | 198 | 726D18.5 | 3336600011557 | 1   |  |  |
| 6.3                            | 63 | 101 | 726D06.3 | 3336600010949 | 1   | 19                            | 135 | 198 | 726D19   | 3336600011564 | 1   |  |  |
| 6.4                            | 63 | 101 | 726D06.4 | 3336600010956 | 1   | 19.5                          | 140 | 205 | 726D19.5 | 3336600011571 | 1   |  |  |
| 6.5                            | 63 | 101 | 726D06.5 | 3336600010963 | 1   | 20                            | 140 | 205 | 726D20   | 3336600011588 | 1   |  |  |



**ALL SETS**  
PAGES 146-147



700C



718C



719C



745D



747D



206E

Ref.  
735

# HSS PRO long series

## Fully ground HSS drill bit long series

Multi-purpose HSS drill bit long series for general use. Drills through unalloyed and alloyed steels up to 900N/mm<sup>2</sup>.



### • VERSATILITY

#### Description

- Fully ground HSS drill bit.
- Split point 118°.
- DIN 340 - N type flute.
- Diameter tolerance h8.

#### Advantages

- Priming accuracy at start-up.
- Fast drilling.



Alloy steel, Non-alloy steel, Cast iron, Cast iron, spheroidal

Shank



Cylindrical

Angle



| Ø                               | WL  | TL  | Ref.   | Gencod        | Qty |
|---------------------------------|-----|-----|--------|---------------|-----|
| <b>Plastic pouch of 1 Piece</b> |     |     |        |               |     |
| 2                               | 56  | 85  | 735D02 | 3336600012455 | 1   |
| 3                               | 66  | 100 | 735D03 | 3336600011922 | 1   |
| 4                               | 78  | 119 | 735D04 | 3336600011939 | 1   |
| 5                               | 87  | 132 | 735D05 | 3336600011946 | 1   |
| 6                               | 91  | 139 | 735D06 | 3336600011953 | 1   |
| 7                               | 102 | 159 | 735D07 | 3336600012462 | 1   |
| 8                               | 109 | 165 | 735D08 | 3336600011960 | 1   |
| 9                               | 115 | 175 | 735D09 | 3336600012479 | 1   |
| 10                              | 121 | 184 | 735D10 | 3336600011977 | 1   |
| 11                              | 128 | 195 | 735D11 | 3336600012486 | 1   |
| 12                              | 134 | 205 | 735D12 | 3336600012493 | 1   |
| 13                              | 134 | 205 | 735D13 | 3336600012509 | 1   |



Quality plastic pouch



Ref.  
**713**

## Fully ground HSS drill bit long series pack 5 or 10

Multi-purpose HSS drill bit long series for general use. Drills through unalloyed and alloyed steels up to 900N/mm<sup>2</sup>.



| Ø                              | WL  | TL  | Ref.     | Gencod        | Qty |
|--------------------------------|-----|-----|----------|---------------|-----|
| <b>Quadropack of 10 Pieces</b> |     |     |          |               |     |
| 2                              | 56  | 85  | 713D02   | 3336600018464 | 1   |
| 2.5                            | 62  | 95  | 713D02.5 | 3336600018518 | 1   |
| 3                              | 66  | 100 | 713D03   | 3336600018563 | 1   |
| 3.2                            | 69  | 106 | 713D03.2 | 3336600018587 | 1   |
| 3.5                            | 73  | 112 | 713D03.5 | 3336600018617 | 1   |
| 4                              | 78  | 119 | 713D04   | 3336600018662 | 1   |
| 4.2                            | 78  | 119 | 713D04.2 | 3336600018686 | 1   |
| 4.5                            | 82  | 126 | 713D04.5 | 3336600018716 | 1   |
| 5                              | 87  | 132 | 713D05   | 3336600018761 | 1   |
| 5.2                            | 87  | 132 | 713D05.2 | 3336600018785 | 1   |
| 5.5                            | 91  | 139 | 713D05.5 | 3336600018815 | 1   |
| 5.8                            | 91  | 139 | 713D05.8 | 3336600018846 | 1   |
| 6                              | 91  | 139 | 713D06   | 3336600018860 | 1   |
| 6.2                            | 97  | 148 | 713D06.2 | 3336600018884 | 1   |
| 6.5                            | 97  | 148 | 713D06.5 | 3336600018914 | 1   |
| 7                              | 102 | 156 | 713D07   | 3336600018969 | 1   |
| 7.5                            | 102 | 156 | 713D07.5 | 3336600019027 | 1   |
| 8                              | 109 | 165 | 713D08   | 3336600019072 | 1   |
| 8.5                            | 109 | 165 | 713D08.5 | 3336600019126 | 1   |
| 9                              | 115 | 175 | 713D09   | 3336600019171 | 1   |
| 9.5                            | 115 | 175 | 713D09.5 | 3336600019225 | 1   |
| 10                             | 121 | 184 | 713D10   | 3336600019270 | 1   |
| <b>Quadropack of 5 Pieces</b>  |     |     |          |               |     |
| 11                             | 128 | 195 | 713D11   | 3336600019294 | 1   |
| 12                             | 134 | 205 | 713D12   | 3336600019317 | 1   |
| 13                             | 134 | 205 | 713D13   | 3336600019331 | 1   |



Quadropack



Ref.  
**712**

## Fully ground HSS drill bit extra short series pack 10

Multi-purpose HSS drill bit extra short series for general use. Drills through unalloyed and alloyed steels up to 900N/mm<sup>2</sup>.



| Ø                              | WL  | TL  | Ref.     | Gencod        | Qty |
|--------------------------------|-----|-----|----------|---------------|-----|
| <b>Quadropack of 10 Pieces</b> |     |     |          |               |     |
| 2                              | 56  | 85  | 713D02   | 3336600018464 | 1   |
| 2.5                            | 62  | 95  | 713D02.5 | 3336600018518 | 1   |
| 3                              | 66  | 100 | 713D03   | 3336600018563 | 1   |
| 3.2                            | 69  | 106 | 713D03.2 | 3336600018587 | 1   |
| 3.5                            | 73  | 112 | 713D03.5 | 3336600018617 | 1   |
| 4                              | 78  | 119 | 713D04   | 3336600018662 | 1   |
| 4.2                            | 78  | 119 | 713D04.2 | 3336600018686 | 1   |
| 4.5                            | 82  | 126 | 713D04.5 | 3336600018716 | 1   |
| 5                              | 87  | 132 | 713D05   | 3336600018761 | 1   |
| 5.2                            | 87  | 132 | 713D05.2 | 3336600018785 | 1   |
| 5.5                            | 91  | 139 | 713D05.5 | 3336600018815 | 1   |
| 5.8                            | 91  | 139 | 713D05.8 | 3336600018846 | 1   |
| 6                              | 91  | 139 | 713D06   | 3336600018860 | 1   |
| 6.2                            | 97  | 148 | 713D06.2 | 3336600018884 | 1   |
| 6.5                            | 97  | 148 | 713D06.5 | 3336600018914 | 1   |
| 7                              | 102 | 156 | 713D07   | 3336600018969 | 1   |
| 7.5                            | 102 | 156 | 713D07.5 | 3336600019027 | 1   |
| 8                              | 109 | 165 | 713D08   | 3336600019072 | 1   |
| 8.5                            | 109 | 165 | 713D08.5 | 3336600019126 | 1   |



Quadropack



Ref.  
**715**

## Fully ground HSS drill bit double point pack 10

Multi purpose HSS drill bit double point for general use.



| Ø                              | WL | TL | Ref.     | Gencod        | Qty |
|--------------------------------|----|----|----------|---------------|-----|
| <b>Quadropack of 10 Pieces</b> |    |    |          |               |     |
| 3.1                            | 12 | 49 | 715D03.1 | 3336600017849 | 1   |
| 3.2                            | 12 | 49 | 715D03.2 | 3336600017856 | 1   |
| 3.3                            | 12 | 49 | 715D03.3 | 3336600017863 | 1   |
| 3.5                            | 13 | 52 | 715D03.5 | 3336600017870 | 1   |
| 4                              | 14 | 55 | 715D04   | 3336600017887 | 1   |
| 4.1                            | 14 | 55 | 715D04.1 | 3336600017894 | 1   |
| 4.2                            | 14 | 55 | 715D04.2 | 3336600017900 | 1   |
| 5                              | 17 | 62 | 715D05   | 3336600017917 | 1   |
| 5.1                            | 17 | 62 | 715D05.1 | 3336600017924 | 1   |
| 5.2                            | 17 | 62 | 715D05.2 | 3336600017931 | 1   |



Quadropack



Ref.  
750

# Standard HSS roll forged drill bit

HSS drill bit for general use pack 2, 5 or 10 units.



## • DRILL BIT ELASTICITY

### Features

- Roll forged HSS drill bit.
- Point angle 118°.
- DIN 338 - N type flute.
- Diameter tolerance h8.

### Benefits

- Rolling process gives elasticity and reduce the risk of breaking.

### Applications

- Drilling of unalloyed and alloyed steels up to 900nm<sup>2</sup>, cast iron, PVC.



Alloy steel, Non-alloy steel, Cast iron, Cast iron, spheroidal

Shank



Cylindrical

Angle



Sharpening



| Ø                              | WL | TL  | Ref.     | Gencod        | Qty |
|--------------------------------|----|-----|----------|---------------|-----|
| <b>Quadropack of 10 Pieces</b> |    |     |          |               |     |
| 2                              | 24 | 49  | 750D02   | 3336600010017 | 1   |
| 2.5                            | 30 | 57  | 750D02.5 | 3336600010024 | 1   |
| 3                              | 33 | 61  | 750D03   | 3336600010031 | 1   |
| 3.2                            | 36 | 65  | 750D03.2 | 3336600010048 | 1   |
| 3.5                            | 39 | 70  | 750D03.5 | 3336600010055 | 1   |
| 4                              | 43 | 75  | 750D04   | 3336600010062 | 1   |
| 4.2                            | 43 | 75  | 750D04.2 | 3336600010079 | 1   |
| 4.5                            | 47 | 80  | 750D04.5 | 3336600010086 | 1   |
| 5                              | 52 | 86  | 750D05   | 3336600010093 | 1   |
| 5.2                            | 52 | 86  | 750D05.2 | 3336600010109 | 1   |
| 5.5                            | 57 | 93  | 750D05.5 | 3336600010116 | 1   |
| 6                              | 57 | 93  | 750D06   | 3336600010123 | 1   |
| 6.5                            | 63 | 101 | 750D06.5 | 3336600010130 | 1   |
| 7                              | 69 | 109 | 750D07   | 3336600010147 | 1   |
| 7.5                            | 69 | 109 | 750D07.5 | 3336600010154 | 1   |
| 8                              | 75 | 117 | 750D08   | 3336600010161 | 1   |
| 8.5                            | 75 | 117 | 750D08.5 | 3336600010178 | 1   |
| 9                              | 81 | 125 | 750D09   | 3336600010185 | 1   |
| 9.5                            | 81 | 125 | 750D09.5 | 3336600010192 | 1   |
| 10                             | 87 | 133 | 750D10   | 3336600010208 | 1   |

| Ø                             | WL  | TL  | Ref.   | Gencod        | Qty |
|-------------------------------|-----|-----|--------|---------------|-----|
| <b>Quadropack of 5 Pieces</b> |     |     |        |               |     |
| 11                            | 94  | 142 | 750D11 | 3336600010222 | 1   |
| 12                            | 101 | 151 | 750D12 | 3336600010246 | 1   |
| 13                            | 101 | 151 | 750D13 | 3336600010260 | 1   |
| <b>Quadropack of 2 Pieces</b> |     |     |        |               |     |
| 14                            | 108 | 160 | 750D14 | 3336600010284 | 1   |
| 15                            | 114 | 169 | 750D15 | 3336600010307 | 1   |
| 16                            | 120 | 178 | 750D16 | 3336600010321 | 1   |
| 18                            | 130 | 191 | 750D18 | 3336600010369 | 1   |
| 20                            | 140 | 205 | 750D20 | 3336600010406 | 1   |

ALL  
SETS  
PAGES 146-147



752C



775D



776D





Ref.  
500B

# Step drill TiAlN 5% cobalt

## Step drill 4-12 mm

Step drill HSS 5% cobalt with TiAlN coating. Excellent heat resistance, wear limitation. Ideal for drilling in sheet metal or thin materials such as stainless steel, cast iron.



### RESISTANCE TO OVERHEATING

#### Features

- HSS 5% cobalt fully ground.
- TiAlN coating.
- Tip angle 118°.
- Helicoidal flute.

#### Benefits

- Long life.
- Heating resistance.
- Drilling accuracy.
- Optimum clamping in the chuck.



Stainless steel, Alloy steel, Non-alloy steel, Cast iron, Cast iron, spheroidal, Brass, Aluminum, Composite, Copper, Plastic

Shank




Cylindrical  
3 flat

Angle



DIY tube

| Capacity             | Ø    | TL | D  | d | l1 | Ref. | Gencod        | Qty |
|----------------------|------|----|----|---|----|------|---------------|-----|
| 4-5-6-7-8-9-10-11-12 | 4-12 | 79 | 12 | 6 | 5  | 500B | 3336600144064 | 1   |

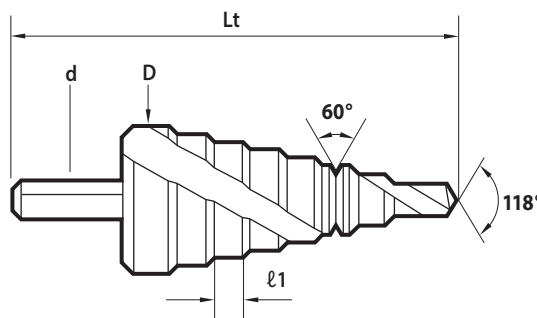

ALL SETS  
PAGES 146-147



503C

Ref.  
501B

## Step drill 4-20 mm

Step drill HSS 5% cobalt with TiAlN coating. Excellent heat resistance, wear limitation. Ideal for drilling in sheet metal or thin materials such as stainless steel, cast iron.



DIY tube



| Capacity                       | Ø    | TL | D  | d | l1 | Ref. | Gencod        | Qty |
|--------------------------------|------|----|----|---|----|------|---------------|-----|
| <b>4-6-8-10-12-14-16-18-20</b> | 4-20 | 67 | 20 | 8 | 3  | 501B | 3336600144071 | 1   |

Ref.  
502B

## Step drill 4-30 mm

Step drill HSS 5% cobalt with TiAlN coating. Excellent heat resistance, wear limitation. Ideal for drilling in sheet metal or thin materials such as stainless steel, cast iron.



DIY tube



| Capacity                                      | Ø    | TL  | D  | d  | l1 | Ref. | Gencod        | Qty |
|---|------|-----|----|----|----|------|---------------|-----|
| <b>4-6-8-10-12-14-16-18-20-22-24-26-28-30</b> | 4-30 | 100 | 30 | 10 | 4  | 502B | 3336600144088 | 1   |




Ref.  
511B

# Step drill

## Step drill 4-20 mm

Step drill HSS fully ground with 118° angle for more precision and straight flute for easy resharping.



### • ACCURCING DRILLING

#### Features

- HSS fully ground.
- Tip angle 118°.
- Cylindrical shank.

#### Benefits

- Drilling accuracy.



Alloy steel, Non-alloy steel, Cast iron Spheroidal, Composite

Shank




Cylindrical

Angle



DIY tube

| Capacity                | Ø  | TL | D  | d | l1 | Ref. | Gencod        | Qty |
|-------------------------|----|----|----|---|----|------|---------------|-----|
| 4-6-8-10-12-14-16-18-20 | 20 | 67 | 20 | 8 | 3  | 511B | 3336600194076 | 1   |

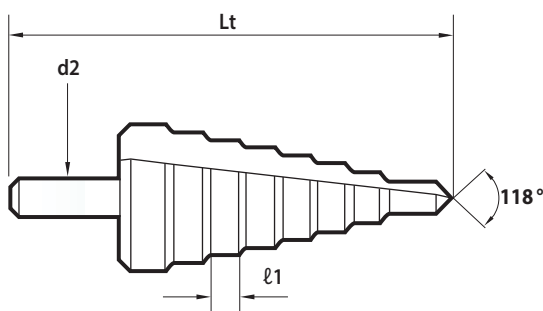

ALL SETS  
PAGES 146-147





Ref.  
512B

## Step drill 4-30 mm

Step drill HSS fully ground with 118° angle for more precision and straight flute for easy resharpener.



DIY tube



| Capacity                               | Ø    | TL  | D  | d  | l1 | Ref. | Gencod        | Qty |
|--|------|-----|----|----|----|------|---------------|-----|
| 4-6-8-10-12-14-16-18-20-22-24-26-28-30 | 4-30 | 100 | 30 | 10 | 4  | 512B | 3336600194069 | 1   |

Ref.  
513B

## Step drill 6-38 mm

Step drill HSS fully ground with 118° angle for more precision and straight flute for easy resharpener.



DIY tube



| Capacity                          | Ø    | TL  | D  | d  | l1 | Ref. | Gencod        | Qty |
|-----------------------------------|------|-----|----|----|----|------|---------------|-----|
| 6-9-13-16-19-21-23-26-29-32-35-38 | 6-38 | 100 | 38 | 10 | 4  | 513B | 3336600194311 | 1   |



Ref.  
867

# Gun Tap

HSS machine tap

Tapping in alloy and non-alloy steels.



• OFFER HIGH CUTTING

**Features**

- HSS fully ground tap.
- Din 376.

**Benefits**

- One step operation.
- Precision.



Alloy steel, Non-alloy steel

Shank    Metrical thread



Square

M



Round or square tube

| Ø drilling | Ø x Thread | WL | TL  | Ref.   | Gencod        | Qty |
|------------|------------|----|-----|--------|---------------|-----|
| 2.5        | M3 x 0,50  | 11 | 56  | 867D03 | 3336600020368 | 1   |
| 3.3        | M4 x 0,70  | 13 | 63  | 867D04 | 3336600020375 | 1   |
| 4.2        | M5 x 0,80  | 16 | 70  | 867D05 | 3336600020382 | 1   |
| 5          | M6 x 1,00  | 19 | 80  | 867D06 | 3336600020399 | 1   |
| 6.8        | M8 x 1,25  | 22 | 90  | 867D08 | 3336600020405 | 1   |
| 8.5        | M10 x 1,50 | 24 | 100 | 867D10 | 3336600020412 | 1   |
| 10.2       | M12 x 1,75 | 29 | 110 | 867D12 | 3336600020429 | 1   |
| 12         | M14 x 2,00 | 30 | 110 | 867D14 | 3336600020436 | 1   |
| 14         | M16 x 2,00 | 34 | 110 | 867D16 | 3336600020443 | 1   |

ALL SETS  
PAGES 146-147

x31



078E

x15



076E

Ref.  
U505

# Screw extractor



## Features

- High quality steel.
- Reversed pitch, left hand pitch.
- Black finish.

## Advices

- For the tool holder: use left-hand turn, for large diameters: spanner, for small spaces: flat or ratchet spanner.

| Ø   | Ref.     | Gencod        | Qty |
|-----|----------|---------------|-----|
| 1-6 | U5050163 | 4019321501635 | 1   |
| 1-8 | U5050183 | 4019321501833 | 1   |

Shank



Square



| Screw to extract | Ø Drilling | N° Extractor | SW mm | N° adjustable tap wrench | Adjustable spanner |
|------------------|------------|--------------|-------|--------------------------|--------------------|
| M3-6             | 2.50       | 1            | 3.20  | 1                        | yes                |
| M6-8             | 3          | 2            | 4     | 1-2                      | yes                |
| M8-11            | 4.50       | 3            | 5.20  | 1-2                      | yes                |
| M11-14           | 6          | 4            | 6.40  | 2-3                      | yes                |
| M14-18           | 8          | 5            | 8.85  | 3                        | yes                |
| M18-24           | 11         | 6            | 11.80 | 3                        | yes                |
| M24-33           | 14         | 7            | 15    | -                        | yes                |
| M33-50           | 21         | 8            | 20    | -                        | yes                |

ALL SETS  
PAGES 146-147

x6



U5050163

x8



U5050183

Ref.  
504

# Countersink

## Features

- 3 cutting edges.
- Countersink angle 90°.
- Din 335C.
- Cylindrical shank.

## Benefits

- Extremely sharp edges
- Deburring and countersinking



Stainless steel, Non-alloy steel, Aluminum

Shank



Cylindrical

Angle



DIY tube

| Ø    | WL | Ref.     | Gencod        | Qty |
|------|----|----------|---------------|-----|
| 6.3  | 45 | 504D06.3 | 3336600173453 | 1   |
| 8.3  | 50 | 504D08.3 | 3336600166738 | 1   |
| 10.4 | 50 | 504D10.4 | 3336600166745 | 1   |
| 12.4 | 56 | 504D12.4 | 3336600166752 | 1   |
| 16.5 | 56 | 504D16.5 | 3336600166769 | 1   |
| 20.5 | 63 | 504D20.5 | 3336600166776 | 1   |

ALL SETS  
PAGES 146-147

x5



504C

x5



505C

5% Co




Ref.  
D2409

# TCT HSS drill bit

## Hss carbide tipped drill bit

HSS carbide tipped drill bit, K20 carbide tip brazed at very high temperature for dilling hard metal.



### • HIGH PRECISION

#### Features

- Point angle 118°.
- Right cut 6°.
- Helix angle 25° type N.
- DIN 338.

#### Advices

- To be use on a column drill or machine center.




Stainless steel, Alloy steel, Non-alloy steel,  
Cast iron, Cast iron, spheroidal, Aluminum,  
Titanium alloy, Copper, Plastic

|  |   |   |   |
|--|---|---|---|
| Shank  | Angle   | Sharpening  |   |
|  |  |  |  |
| Ø Max 12.7   |   |   |   |
| Cylindrical  |   |   |   |

| Ø                   | WL  | TL  | Ref.       | Gencod        | Qty |
|---------------------|-----|-----|------------|---------------|-----|
| <b>Short series</b> |     |     |            |               |     |
| 1.5                 | 18  | 40  | D2409D0150 | 3336600121287 | 1   |
| 2                   | 24  | 49  | D2409D0200 | 3336600121331 | 1   |
| 2.5                 | 30  | 57  | D2409D0250 | 3336600121386 | 1   |
| 3                   | 33  | 61  | D2409D0300 | 3336600121430 | 1   |
| 3.2                 | 36  | 65  | D2409D0320 | 3336600121454 | 1   |
| 3.3                 | 36  | 65  | D2409D0330 | 3336600121461 | 1   |
| 3.5                 | 39  | 70  | D2409D0350 | 3336600121485 | 1   |
| 4                   | 43  | 75  | D2409D0400 | 3336600121539 | 1   |
| 4.2                 | 43  | 75  | D2409D0420 | 3336600121553 | 1   |
| 4.5                 | 47  | 80  | D2409D0450 | 3336600121584 | 1   |
| 4.8                 | 52  | 86  | D2409D0480 | 3336600121614 | 1   |
| 5                   | 52  | 86  | D2409D0500 | 3336600121638 | 1   |
| 5.2                 | 52  | 86  | D2409D0520 | 3336600121652 | 1   |
| 5.5                 | 57  | 93  | D2409D0550 | 3336600121683 | 1   |
| 6                   | 57  | 93  | D2409D0600 | 3336600121737 | 1   |
| 6.5                 | 63  | 101 | D2409D0650 | 3336600121782 | 1   |
| 7                   | 69  | 109 | D2409D0700 | 3336600121836 | 1   |
| 7.5                 | 69  | 109 | D2409D0750 | 3336600121881 | 1   |
| 8                   | 75  | 117 | D2409D0800 | 3336600121935 | 1   |
| 9                   | 81  | 125 | D2409D0900 | 3336600122031 | 1   |
| 9.5                 | 81  | 125 | D2409D0950 | 3336600122086 | 1   |
| 10                  | 87  | 133 | D2409D1000 | 3336600122130 | 1   |
| 10.5                | 87  | 133 | D2409D1050 | 3336600122154 | 1   |
| 11                  | 94  | 142 | D2409D1100 | 3336600122161 | 1   |
| 11.5                | 94  | 142 | D2409D1150 | 3336600122185 | 1   |
| 12                  | 101 | 151 | D2409D1200 | 3336600122192 | 1   |
| 12.5                | 101 | 151 | D2409D1250 | 3336600122215 | 1   |
| 13                  | 101 | 151 | D2409D1300 | 3336600122222 | 1   |
| 13.5                | 108 | 160 | D2409D1350 | 3336600122239 | 1   |
| 14                  | 108 | 160 | D2409D1400 | 3336600122246 | 1   |
| 15                  | 114 | 169 | D2409D1500 | 3336600122260 | 1   |
| 15.5                | 120 | 178 | D2409D1550 | 3336600122277 | 1   |
| 16                  | 125 | 184 | D2409D1600 | 3336600122284 | 1   |

| Ø    | WL  | TL  | Ref.       | Gencod        | Qty |
|------|-----|-----|------------|---------------|-----|
| 16.5 | 125 | 184 | D2409D1650 | 3336600122291 | 1   |
| 17   | 125 | 184 | D2409D1700 | 3336600122307 | 1   |
| 17.5 | 130 | 191 | D2409D1750 | 3336600122314 | 1   |
| 18   | 130 | 191 | D2409D1800 | 3336600122321 | 1   |
| 18.5 | 135 | 198 | D2409D1850 | 3336600122338 | 1   |
| 19   | 135 | 198 | D2409D1900 | 3336600122345 | 1   |
| 19.5 | 140 | 205 | D2409D1950 | 3336600122352 | 1   |
| 20   | 140 | 205 | D2409D2000 | 3336600122369 | 1   |



Grey plastic pouch

ALL  
**SETS**  
PAGES 146-147




Ref.  
D2418

# TCT HSS drill bit

## Hss carbide tipped drill bit long serie

HSS carbide tipped drill bit, K20 carbide tip brazed at very high temperature for dilling hard metal.



### • HIGH PRECISION

#### Features

- Point angle 118°.
- Right cut 6°.
- Helix angle 25° type N.
- DIN 340.

#### Advices

- To be use on a column drill or machine center.



Stainless steel, Alloy steel, Non-alloy steel,  
Cast iron, Cast iron, spheroidal, Aluminum,  
Titanium alloy, Copper, Plastic

Shank



Cylindrical

Angle



Sharpening



| Ø                  | WL  | TL  | Ref.       | Gencod        | Qty |
|--------------------|-----|-----|------------|---------------|-----|
| <b>Long series</b> |     |     |            |               |     |
| 1.8                | 53  | 80  | D2418D0180 | 3336600129894 | 1   |
| 2                  | 56  | 85  | D2418D0200 | 3336600129917 | 1   |
| 2.5                | 62  | 95  | D2418D0250 | 3336600129962 | 1   |
| 3                  | 66  | 100 | D2418D0300 | 3336600130012 | 1   |
| 3.5                | 73  | 112 | D2418D0350 | 3336600130067 | 1   |
| 4                  | 78  | 119 | D2418D0400 | 3336600130111 | 1   |
| 4.5                | 82  | 126 | D2418D0450 | 3336600130166 | 1   |
| 5                  | 87  | 132 | D2418D0500 | 3336600130210 | 1   |
| 5.5                | 91  | 139 | D2418D0550 | 3336600130265 | 1   |
| 6                  | 91  | 139 | D2418D0600 | 3336600130319 | 1   |
| 6.5                | 97  | 148 | D2418D0650 | 3336600130364 | 1   |
| 7                  | 102 | 156 | D2418D0700 | 3336600130418 | 1   |
| 8                  | 109 | 165 | D2418D0800 | 3336600130517 | 1   |
| 8.5                | 109 | 165 | D2418D0850 | 3336600130562 | 1   |
| 9.5                | 115 | 175 | D2418D0950 | 3336600130586 | 1   |
| 10                 | 121 | 184 | D2418D1000 | 3336600130593 | 1   |
| 10.5               | 121 | 184 | D2418D1050 | 3336600130609 | 1   |
| 11                 | 128 | 195 | D2418D1100 | 3336600130616 | 1   |
| 11.5               | 128 | 195 | D2418D1150 | 3336600130623 | 1   |
| 12                 | 134 | 205 | D2418D1200 | 3336600130630 | 1   |
| 12.5               | 134 | 205 | D2418D1250 | 3336600130647 | 1   |
| 13                 | 134 | 205 | D2418D1300 | 3336600130654 | 1   |
| 13.5               | 140 | 214 | D2418D1350 | 3336600130661 | 1   |
| 14                 | 140 | 214 | D2418D1400 | 3336600130678 | 1   |
| 14.5               | 144 | 220 | D2418D1450 | 3336600130685 | 1   |
| 16                 | 149 | 227 | D2418D1600 | 3336600130708 | 1   |
| 17                 | 154 | 235 | D2418D1700 | 3336600130715 | 1   |
| 18                 | 158 | 241 | D2418D1800 | 3336600130722 | 1   |
| 19                 | 162 | 247 | D2418D1900 | 3336600130739 | 1   |
| 20                 | 166 | 254 | D2418D2000 | 3336600130746 | 1   |



Grey plastic pouch



# 100% HSS

P.O.S ADVERTISING  
TO SPUR SALES



Cross-merchandising

To promote HSS sets on sales shelf  
Monobloc display.  
Ref. M00205



Ref. C00107



Ref. C00090



Display counter

To promote sets & cases  
Ref. C00090



Display HSS counter

26 compartments  
Opening on Front/Rear,  
with key lock.  
Ref. M00087

| Features                              | Ref.   | Gencod        |
|---------------------------------------|--------|---------------|
| CROSS-MERCHANDISING DISPLAY           | M00205 | 3336609010483 |
| CARDBOARD COUNTER P.O.S               | C00090 | 3336609005830 |
| CARDBOARD P.O.S FOR SETS PRESENTATION | C00107 | 3336609007308 |
| DISPLAY HSS COUNTER                   | M00087 | 3336609000194 |





## 1 METER DISPLAY



### Unit range

Rack Presentation

HSS COBALT 5% drill bit - ref. 731

HSS G3 drill bit - ref. 702

HSS PRO drill bit - ref. 729

### Set range

### Quadropack range

HSS COBALT 5% drill bit - ref. 700

HSS G3 drill bit - ref. 703

HSS PRO drill bit - ref. 726

| Features  | Ref.          | Gencod        |
|---|---------------|---------------|
| 1M SALES SHELF<br>(to attribute with the pediment of your choice)                 | GOND1000      | 3336609000019 |
| LUMINAR PEDIMENT FOR GOND1000   | M00202        | 3336609009500 |
| ELECTRIC CABLE FOR LUMINAR PEDIMENT<br>(to attribute with each pediment command ) | CORDON        | 3336600187528 |
| DIAGER PEDIMENT FOR GOND1000  | FR1000        | 3336609005472 |
| ADJUSTABLE RACK WITH 20 DOUBLE HOOKS, 1M  | RAT1000DOUBLE | 3336609002211 |
| ADJUSTABLE RACK WITHOUT HOOKS 1M  | M00150        | 3336609004468 |
| DOUBLE HOOK   | M00151        | 3336609004475 |
| SIMPLE HOOK   | M00152        | 3336609004482 |
| SHELF 900MM ADJUSTABLE WIDTH DEPTH 360MM  | M00167        | 3336609006141 |
| STORAGE UNIT WITH 2 DRAWERS (to attribute<br>with 2 BAR1000 + ILV)                | M00170        | 3336609006806 |
| DISPLAY CASE (to attribute with 1 BAR1000)  | M00157        | 3336609005274 |
| 1M STAY FOR 1M SALES SHELF  | BAR1000       | 3336609000057 |
| G3 MAGNET   | B00357        | 3336609004987 |
| COBALT MAGNET   | B00358        | 3336609010520 |
| HSS PRO MAGNET  | B00359        | 3336609010537 |



# METAL

## HSS STANDARD



## HSS PRO



## HSS COBALT 5%



### Features

### Pcs

### Type

### Composition

### Ref.

### Gencod

| Features  | Pcs | Type      | Composition                                  | Ref. | Gencod        |
|-----------|-----|-----------|--|------|---------------|
| STANDARD  | 10  | Set       | HSS Rolled Forged Ø1-10mm                    | 752C | 3336600007116 |
| STANDARD  | 19  | Metal set | HSS Rolled Forged Ø1 à 10mm par 0,5mm        | 775D | 3336600025745 |
| STANDARD  | 25  | Metal set | HSS Rolled Forged Ø1 à 10mm par 0,5mm        | 776D | 3336600025752 |
| COBALT 5% | 6   | Solo      | HSS Cobalt 5% Ø2-3-4-5-6-8mm                 | 706C | 3336600007185 |
| COBALT 5% | 10  | Duo       | HSS COBALT 5% Ø1-10mm                        | 720C | 3336600083547 |
| COBALT 5% | 19  | Set       | HSS COBALT 5% Ø1-10mm / 0,5mm                | 708D | 3336600182226 |
| COBALT 5% | 25  | Set       | HSS COBALT 5% Ø1-13mm / 0,5mm                | 707D | 3336600160408 |
| PRO       | 19  | Metal set | GROUND HSS PRO Ø1-10 / 0,5mm                 | 745D | 3336600025769 |
| PRO       | 25  | Metal set | GROUND HSS PRO Ø1-13 / 0,5mm                 | 747D | 3336600025776 |
| PRO       | 6   | Solo      | GROUND HSS PRO Ø2-3-4-5-6-8mm                | 700C | 3336600007123 |
| PRO       | 10  | Duo       | GROUND HSS PRO Ø1-10mm                       | 718C | 3336600083561 |
| PRO       | 13  | Duo       | GROUND HSS PRO Ø1,5-6,5mm / 0,5mm +3,2-4,2mm | 719C | 3336600083554 |
| PRO       | 170 | Case      | GROUND HSS PRO Ø1-10 / 0,5mm                 | 206E | 3336600182219 |





G3



| Features                    | Pcs | Type | Composition   | Ref. | Gencod        |
|-----------------------------|-----|------|---|------|---------------|
| MULTI-LAYERS COATING G3     | 19  | Set  | HSS G3 19 set HSS 3G Ø1-10mm / 0,5mm  | 705D | 3336600160385 |
| MULTI-LAYERS COATING G4     | 25  | Set  | HSS G3 25 set HSS 3G Ø1-13mm / 0,5mm  | 706D | 3336600160392 |
| MULTI-LAYERS COATING G5     | 170 | Case | HSS G3 19 set HSS 3G Ø1-10mm / 0,5mm  | 203E | 3336600181090 |
| TCT HSS DRILL BIT           | 6   | Set  | Tip Drill Bit D2409 Ø3-4-5-6-8-10mm   | 507C | 3336600157699 |
| SET OF TAPES AND DIES       | 32  | Case | Tap M3-4-5-6-8-10-12 Die M3-4-5-6-8-10-12 - 1 Adjustable tap wrench + 1 Die holder + 1 tool                       | 078E | 3336600167537 |
| SET OF TAPES AND DIES       | 15  | Set  | TAP & DRILL BIT 15 set Drill bit HSS Ø2,5-3,3-4,2-5-6,8-8,5-10,2mm Tap M3-4-5-6-8-10-12 + 1 Adjustable tap wrench | 076E | 3336600168152 |
| CONICAL CUTTER              | 5   | Set  | HSS 90° Cobalt Ø8,3-10,4-12,4-16,5-20,5 mm  | 505C | 3336600144118 |
| CONICAL CUTTER              | 5   | Set  | HSS 90° Ø8,3-10,4-12,4-16,5-20,5 mm   | 504C | 3336600144101 |
| STEP DRILL BIT COBALT TIALN | 3   | Set  | 5% Cobalt TIALN Step drill bit 4 to 12 - 4 to 20 - 4 to 30  | 503C | 3336600144095 |
| STEP DRILL BIT              | 3   | Set  | Step drill bit 4 to 12 - 4 to 20 - 4 to 30  | 513C | 3336600194083 |





# Drilling wood manual

| Ref.   | Designation            | Attachment                 | Origin & Standards  | Benefits  | Page |
|--|------------------------|----------------------------|---|---|------|
| <b>912</b><br><b>913</b><br><b>941</b><br><b>946</b> | Auger bit<br>SUPER PRO | Hexa                       |    | <ul style="list-style-type: none"> <li>• Structural work</li> <li>• Deep drilling</li> <li>• Speed</li> <li>• Robustness</li> </ul>                                   | 150  |
| <b>942</b><br><b>943</b>                             | Auger bit<br>SUPER PRO | SDS-plus                   |    | <ul style="list-style-type: none"> <li>• Structural work</li> <li>• Deep drilling</li> <li>• Speed</li> <li>• Robustness</li> </ul>                                   | 151  |
| <b>904</b>   | Flat bit               | Quick lock                 |   | <ul style="list-style-type: none"> <li>• The work of electricity, install lock</li> <li>• Speed, cleanliness of cut &amp; increased rigidity</li> </ul>               | 152  |
| <b>934</b>   | Forstner woodmax bit   | Hexa                       |    | <ul style="list-style-type: none"> <li>• The work of joineries (windows, doors...)</li> <li>• Net Holes &amp; precise, anti-overheating</li> </ul>                    | 154  |
| <b>723M</b><br><b>722M</b>                           | Formwork drill bit     | Straight shank<br>SDS-plus |  | <ul style="list-style-type: none"> <li>• Drill hole multi-layers</li> <li>• Ideal for the renovation work, achievement of formwork</li> <li>• Great length</li> </ul> | 155  |
| <b>910</b>   | 4 points drill bit     | Straight shank             |   | <ul style="list-style-type: none"> <li>• Calibrated hole and clean, fast and precise</li> </ul>   | 157  |
| <b>915</b>   | 3 points drill bit     | Straight shank             |   | <ul style="list-style-type: none"> <li>• Calibrated hole and clean.</li> </ul>  | 158  |
| <b>902</b>   | Decking kit            | Quick lock                 |   | <ul style="list-style-type: none"> <li>• Decking special</li> <li>• Drilling and routing for housing of the screw head</li> <li>• Adjustable depth</li> </ul>         | 160  |
| <b>981</b>   | Brad point bit         | Quick lock                 |   | <ul style="list-style-type: none"> <li>• Screwdriver special</li> </ul>   | 119  |



| Exotic wood | Hard wood  | Low density wood | Laminate   | Plywood | Wooden plate | Plaster Flat | Composite  |
|-------------|------------|------------------|------------|---------|--------------|--------------|------------|
| Optimal     | Optimal    | Optimal          | Optimal    |         |              |              |            |
| Optimal     | Optimal    | Optimal          | Optimal    |         |              |              |            |
| Optimal     | Optimal    | Optimal          | Optimal    | Optimal |              | Occasional   |            |
| Optimal     | Optimal    | Optimal          | Optimal    | Optimal | Optimal      |              |            |
|             |            | Optimal          |            |         |              | Optimal      |            |
| Optimal     | Optimal    | Optimal          |            |         |              |              | Occasional |
|             | Occasional | Optimal          | Occasional | Optimal |              | Optimal      |            |
| Optimal     | Optimal    | Optimal          |            |         |              |              |            |
|             | Occasional | Occasional       |            |         |              |              |            |

*Optimal*
 *Occasional*

Ref.  
912-913  
914-946

# Wood auger bit PRO

## Hexagonal shank



High quality auger drill bit, the hardened head and cutting edge guarantees high endurance. Its thread and precision sharpening allows clean and fast drilling.



Exotic wood, Low density wood, Hard wood, Laminate

ALL SETS  
PAGES 162-163



x5  
913C



DIY tube

| Ø                        | WL   | TL   | Ref.   | Gencod        | Qty |
|--------------------------|------|------|--------|---------------|-----|
| <b>Hex shank - L1080</b> |      |      |        |               |     |
| 12                       | 1000 | 1080 | 946D12 | 3336600186668 | 1   |
| 14                       | 1000 | 1080 | 946D14 | 3336600186675 | 1   |
| 16                       | 1000 | 1080 | 946D16 | 3336600186682 | 1   |
| 18                       | 990  | 1080 | 946D18 | 3336600186699 | 1   |
| 20                       | 990  | 1080 | 946D20 | 3336600186705 | 1   |
| 22                       | 990  | 1080 | 946D22 | 3336600186712 | 1   |
| 24                       | 990  | 1080 | 946D24 | 3336600186729 | 1   |
| 26                       | 990  | 1080 | 946D26 | 3336600186736 | 1   |
| 28                       | 980  | 1080 | 946D28 | 3336600186743 | 1   |
| 30                       | 980  | 1080 | 946D30 | 3336600186750 | 1   |
| 32                       | 980  | 1080 | 946D32 | 3336600186767 | 1   |



DIY tube

**SPEED AND ROBUSTNESS**

### Features

- Self-centring threaded point.
- Head sharpening precision.
- Fully heat treated.

### Benefits

- Deep and fast drilling.
- Clean cut.

### Shank



### Hexagonal

| Ø                       | WL  | TL  | Ref.   | Gencod        | Qty |
|-------------------------|-----|-----|--------|---------------|-----|
| <b>Hex shank - L235</b> |     |     |        |               |     |
| *4                      | 100 | 180 | 912D04 | 3336600153066 | 1   |
| *6                      | 160 | 235 | 912D06 | 3336600153073 | 1   |
| 8                       | 160 | 235 | 912D08 | 3336600153080 | 1   |
| 10                      | 160 | 235 | 912D10 | 3336600153097 | 1   |
| 12                      | 160 | 235 | 912D12 | 3336600153103 | 1   |
| 14                      | 155 | 235 | 912D14 | 3336600153110 | 1   |
| 16                      | 155 | 235 | 912D16 | 3336600153127 | 1   |
| 18                      | 155 | 235 | 912D18 | 3336600153134 | 1   |
| 20                      | 155 | 235 | 912D20 | 3336600153141 | 1   |
| 22                      | 150 | 235 | 912D22 | 3336600153158 | 1   |
| 24                      | 155 | 235 | 912D24 | 3336600152854 | 1   |
| 26                      | 155 | 235 | 912D26 | 3336600152830 | 1   |
| 28                      | 150 | 235 | 912D28 | 3336600152847 | 1   |
| 32                      | 150 | 235 | 912D32 | 3336600153387 | 1   |

\* Straight shank

| Ø                       | WL  | TL  | Ref.   | Gencod        | Qty |
|-------------------------|-----|-----|--------|---------------|-----|
| <b>Hex shank - L460</b> |     |     |        |               |     |
| 8                       | 375 | 460 | 913D08 | 3336600152861 | 1   |
| 10                      | 380 | 460 | 913D10 | 3336600152878 | 1   |
| 12                      | 380 | 460 | 913D12 | 3336600152885 | 1   |
| 14                      | 380 | 460 | 913D14 | 3336600152892 | 1   |
| 16                      | 380 | 460 | 913D16 | 3336600152908 | 1   |
| 17                      | 380 | 460 | 913D17 | 3336600153042 | 1   |
| 18                      | 380 | 460 | 913D18 | 3336600152915 | 1   |
| 20                      | 380 | 460 | 913D20 | 3336600152922 | 1   |
| 22                      | 380 | 460 | 913D22 | 3336600152939 | 1   |
| 24                      | 380 | 460 | 913D24 | 3336600152946 | 1   |
| 25                      | 380 | 460 | 913D25 | 3336600194984 | 1   |
| 26                      | 380 | 460 | 913D26 | 3336600152953 | 1   |
| 28                      | 380 | 460 | 913D28 | 3336600152960 | 1   |
| 30                      | 370 | 460 | 913D30 | 3336600153059 | 1   |
| 32                      | 370 | 460 | 913D32 | 3336600152977 | 1   |

| Ø                       | WL  | TL  | Ref.   | Gencod        | Qty |
|-------------------------|-----|-----|--------|---------------|-----|
| <b>Hex shank - L600</b> |     |     |        |               |     |
| 12                      | 530 | 600 | 941D12 | 3336600153165 | 1   |
| 14                      | 525 | 600 | 941D14 | 3336600153172 | 1   |
| 16                      | 525 | 600 | 941D16 | 3336600153189 | 1   |
| 18                      | 520 | 600 | 941D18 | 3336600153196 | 1   |
| 20                      | 520 | 600 | 941D20 | 3336600153202 | 1   |
| 22                      | 520 | 600 | 941D22 | 3336600153219 | 1   |
| 24                      | 520 | 600 | 941D24 | 3336600153226 | 1   |



Ref.  
942  
943

# Wood auger bit PRO

Compatible SDS-plus



High quality auger drill bit, the hardened head and cutting edge guarantees high endurance. Its thread and precision sharpening allows clean and fast drilling.



## • SPEED AND ROBUSTNESS

### Features

- Self-centring threaded point.
- Head sharpening precision.
- Fully heat treated.


### Benefits

- Deep and fast drilling.
- Clean cut.



Exotic wood, Low density wood, Hard wood, Laminate

Shank



Compatible  
SDS-plus



| Ø                                 | WL  | TL  | Ref.   | Gencod        | Qty |
|-----------------------------------|-----|-----|--------|---------------|-----|
| <b>Compatible SDS-plus - L235</b> |     |     |        |               |     |
| 6                                 | 90  | 200 | 942D06 | 3336600153233 | 1   |
| 8                                 | 90  | 200 | 942D08 | 3336600153240 | 1   |
| 10                                | 160 | 235 | 942D10 | 3336600153257 | 1   |
| 12                                | 160 | 235 | 942D12 | 3336600153264 | 1   |
| 14                                | 155 | 235 | 942D14 | 3336600153271 | 1   |
| 16                                | 155 | 235 | 942D16 | 3336600153288 | 1   |
| 18                                | 155 | 235 | 942D18 | 3336600153295 | 1   |
| 20                                | 155 | 235 | 942D20 | 3336600153301 | 1   |

ALL  
**SETS**  
PAGES 162-163

x5



943C



DIY tube

| Ø                                 | WL  | TL  | Ref.   | Gencod        | Qty |
|-----------------------------------|-----|-----|--------|---------------|-----|
| <b>Compatible SDS-plus - L400</b> |     |     |        |               |     |
| 10                                | 320 | 400 | 943D10 | 3336600153318 | 1   |
| 12                                | 320 | 400 | 943D12 | 3336600153325 | 1   |
| 14                                | 320 | 400 | 943D14 | 3336600153332 | 1   |
| 16                                | 320 | 400 | 943D16 | 3336600153349 | 1   |
| 18                                | 320 | 400 | 943D18 | 3336600153356 | 1   |
| 20                                | 320 | 400 | 943D20 | 3336600153363 | 1   |
| 22                                | 320 | 400 | 943D22 | 3336600153370 | 1   |
| 24                                | 320 | 400 | 943D24 | 3336600178274 | 1   |
| 26                                | 320 | 400 | 943D26 | 3336600178281 | 1   |
| 28                                | 320 | 400 | 943D28 | 3336600178298 | 1   |

Ref.  
904

# Flat wood bit

## Quick-lock shank 6,35 mm

Flat drill bit for drilling hard and soft woods, fits on drill or screwdriver with its quick-lock attachment. The rigidity of the shaft and the ground centering point enable fast and clean drilling.



### • FAST, PRECISE AND CLEAN DRILLING

#### Features

- Centering point.
- Grinded chip breaker.
- High quality steel.
- Rigidity of the axis.

#### Benefits

- Fast drilling.
- Clean cut.
- Greater rigidity.

#### Applications

- Fast drilling in all wood type.



Exotic wood, Low density wood, Hard wood,  
Plywood, Plaster, Laminate

Shank



Quick Lock  
1/4" - 6.35



Quality plastic pouch

| Ø                | TL  | Ref.   | Gencod        | Qty |
|------------------|-----|--------|---------------|-----|
| <b>Hex shank</b> |     |        |               |     |
| 6                | 152 | 904D06 | 3336600028715 | 1   |
| 8                | 152 | 904D08 | 3336600009844 | 1   |
| 10               | 152 | 904D10 | 3336600009851 | 1   |
| 12               | 152 | 904D12 | 3336600009868 | 1   |
| 13               | 152 | 904D13 | 3336600028722 | 1   |
| 14               | 152 | 904D14 | 3336600009875 | 1   |
| 16               | 152 | 904D16 | 3336600009882 | 1   |
| 18               | 152 | 904D18 | 3336600009899 | 1   |
| 19               | 152 | 904D19 | 3336600028739 | 1   |
| 20               | 152 | 904D20 | 3336600009905 | 1   |
| 22               | 152 | 904D22 | 3336600009912 | 1   |
| 24               | 152 | 904D24 | 3336600009929 | 1   |
| 25               | 152 | 904D25 | 3336600009936 | 1   |
| 26               | 152 | 904D26 | 3336600009943 | 1   |
| 28               | 152 | 904D28 | 3336600009950 | 1   |
| 30               | 152 | 904D30 | 3336600009967 | 1   |
| 32               | 152 | 904D32 | 3336600009974 | 1   |
| 35               | 152 | 904D35 | 3336600009981 | 1   |

ALL  
SETS  
PAGES 162-163



925C

Ref.  
906

## Wood drill bits accessories

Flat wood bit extension quick lock shank 1/4"



Quality plastic pouch



| TL  | Ref. | Gencod        | Qty |
|-----|------|---------------|-----|
| 270 | 906  | 3336600012110 | 1   |



Ref.  
908

## Wood drill bits accessories

Extensible drill head 15-45mm for wood drilling



Quality plastic pouch



| Ø        | TL  | Ref. | Gencod        | Qty |
|----------|-----|------|---------------|-----|
| 15 to 45 | 122 | 908  | 3336600012127 | 1   |





Ref.  
934

# Forstner woodmax

## Forstner wood drill bit

### Features

- Self centerign point.
- 2 central blades.
- 2 lateral cutters.
- Specific teeth geometry.

### Benefits

- Clean and precise cut.
- Fast cutting.
- Limited heating.



Hard wood, Wooden plate, Plywood

Shank



Hexa - 8 or  
10 mm



Twistpack

| Ø                    | WL | TL | Ref.   | Gencod        | Qty |
|----------------------|----|----|--------|---------------|-----|
| <b>Hex shank</b>     |    |    |        |               |     |
| *15                  | 57 | 90 | 934D15 | 3336600145474 | 1   |
| *18                  | 57 | 90 | 934D18 | 3336600145498 | 1   |
| *20                  | 57 | 90 | 934D20 | 3336600145504 | 1   |
| 22                   | 57 | 90 | 934D22 | 3336600145511 | 1   |
| 25                   | 57 | 90 | 934D25 | 3336600145528 | 1   |
| 30                   | 57 | 90 | 934D30 | 3336600145542 | 1   |
| 35                   | 57 | 90 | 934D35 | 3336600145559 | 1   |
| 40                   | 57 | 90 | 934D40 | 3336600145566 | 1   |
| 45                   | 57 | 90 | 934D45 | 3336600145573 | 1   |
| 50                   | 57 | 90 | 934D50 | 3336600145580 | 1   |
| <b>*Shank - 8 mm</b> |    |    |        |               |     |

ALL  
SETS  
PAGES 162-163

x5




940D



Ref.  
723M

# Formwork drill bit

## Cylindrical shank



Formwork HSS drill bit, allows multi-layer drilling. Useful for renovation work, drilling cladding with insulation, wood formwork, ....



### • MULTI-LAYERS DRILLING



#### Features

- Point angle 118°.
- HSS Quality.

#### Benefits

- Long drilling length.
- Multi-purpose use.

#### Applications

- Renovation work.



Low density wood, Alloy steel, Laminate

Shank



Cylindrical

Use



Without percussion



Plastic pouch

| Ø                     | WL  | TL  | Ref.    | Gencod        | Qty |
|-----------------------|-----|-----|---------|---------------|-----|
| <b>Straight Shank</b> |     |     |         |               |     |
| 8                     | 360 | 400 | 723MD08 | 3336600116634 | 1   |
| 10                    | 360 | 400 | 723MD10 | 3336600116641 | 1   |
| 12                    | 360 | 400 | 723MD12 | 3336600116658 | 1   |
| 14                    | 360 | 400 | 723MD14 | 3336600116665 | 1   |
| 16                    | 360 | 400 | 723MD16 | 3336600116672 | 1   |
| 18                    | 360 | 400 | 723MD18 | 3336600116689 | 1   |
| 20                    | 360 | 400 | 723MD20 | 3336600116696 | 1   |
| 24                    | 340 | 400 | 723MD24 | 3336600116702 | 1   |

Ref.  
722M

# Compatible SDS-plus

Formwork HSS drill bit, allows multi-layer drilling. Useful for renovation work, drilling cladding with insulation, wood formwork, ....



Black plastic clip

| Ø                          | WL  | TL  | Ref.    | Gencod        | Qty |
|----------------------------|-----|-----|---------|---------------|-----|
| <b>Compatible SDS-Plus</b> |     |     |         |               |     |
| 10                         | 340 | 400 | 722MD10 | 3336600164550 | 1   |
| 12                         | 340 | 400 | 722MD12 | 3336600164567 | 1   |
| 14                         | 340 | 400 | 722MD14 | 3336600164574 | 1   |
| 16                         | 340 | 400 | 722MD16 | 3336600164581 | 1   |
| 18                         | 340 | 400 | 722MD18 | 3336600164598 | 1   |
| 20                         | 340 | 400 | 722MD20 | 3336600164604 | 1   |
| 24                         | 340 | 400 | 722MD24 | 3336600164611 | 1   |

Ref.  
938C

## Wood drill bits accessories

Set 5 adjuster collar for drill bit 4-5-6-8-10mm.



DIY tube



| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 938C | 3336600145795 | 1   |

Ref.  
939

## Wood drill bits accessories

Countersink for wood countersunk head screw.



DIY tube



| Ø | TL | Ref.   | Gencod        | Qty |
|---|----|--------|---------------|-----|
| 3 | 25 | 939D03 | 3336600145801 | 1   |
| 4 | 25 | 939D04 | 3336600145818 | 1   |
| 5 | 25 | 939D05 | 3336600145825 | 1   |





Ref.  
910

# 4 point wood drill bit

Cylindrical shank



Fast and precise, the 4-point geometry provides better wear resistance and increases life time.



## • DRILLING IN ALL TYPES OF WOOD

### Features

- Self centering point.
- 3 cutting edges.

### Benefits

- Clean and precise cut.
- Fast cutting.



Exotic wood, Hard wood, Low density wood, Composite

Shank



Cylindrical



Quality plastic pouch

| Ø                     | WL  | TL  | Ref.   | Gencod        | Qty |
|-----------------------|-----|-----|--------|---------------|-----|
| <b>Straight Shank</b> |     |     |        |               |     |
| 3                     | 22  | 62  | 910D03 | 3336600155138 | 1   |
| 4                     | 35  | 75  | 910D04 | 3336600154537 | 1   |
| 5                     | 46  | 86  | 910D05 | 3336600147348 | 1   |
| 6                     | 53  | 93  | 910D06 | 3336600147355 | 1   |
| 8                     | 77  | 117 | 910D08 | 3336600147362 | 1   |
| 10                    | 93  | 133 | 910D10 | 3336600147379 | 1   |
| 12                    | 111 | 151 | 910D12 | 3336600147386 | 1   |

ALL SETS  
PAGES 162-163



910D

Ref.  
915

# 3 point wood drill bit

## Cylindrical shank

Realise clean hole thanks to the centering tip and the 2 cutting edges. For all types of wood.



- PRECISION
- SHARPNESS

### Features

- Self centering point.
- 2 cutting edges.
- Width and polished margin.

### Benefits

- Accuracy.
- Clean cut.
- Performance.

### Applications

- Renovation wood furniture.



Hard wood, Low density wood, Laminate,  
Plywood

Shank



Cylindrical



Quality plastic  
pouch

| Ø                   | WL  | TL  | Ref.   | Gencod        | Qty |
|---------------------|-----|-----|--------|---------------|-----|
| <b>Short series</b> |     |     |        |               |     |
| 3                   | 21  | 61  | 915D03 | 3336600011984 | 1   |
| 4                   | 35  | 75  | 915D04 | 3336600011991 | 1   |
| 5                   | 46  | 86  | 915D05 | 3336600012004 | 1   |
| 6                   | 53  | 93  | 915D06 | 3336600012011 | 1   |
| 7                   | 69  | 109 | 915D07 | 3336600012028 | 1   |
| 8                   | 77  | 117 | 915D08 | 3336600012035 | 1   |
| 9                   | 85  | 125 | 915D09 | 3336600012516 | 1   |
| 10                  | 93  | 133 | 915D10 | 3336600012042 | 1   |
| 11                  | 102 | 142 | 915D11 | 3336600013124 | 1   |
| 12                  | 111 | 151 | 915D12 | 3336600012059 | 1   |
| 13                  | 111 | 151 | 915D13 | 3336600012066 | 1   |

ALL  
SETS  
PAGES 162-163



907B



917B



905D







Ref.  
902

# Decking kit

Complete kit: drills bits, countersink with depth stop, double hex wrench.

This set allow you to pre-drill calibered holes for the used screws and hide their heads in the same time thank to auto-adjusting carbide countersink.



## • ADJUSTABLE DEPTH

### Features


- 3x ø4mm bits or ø4,5mm bits, one 45° chamfer, carbide plates, one low friction depth stop, one double hex wrench

### Benefits

- Screw compatible from ø4,5 to 6mm for ø4mm drill bit or ø5,5 to 7mm for ø4,5mm drill bit.
- Chamfer bit with carbide plates for a longer service life.
- The drilling and chamfering depths can be accurately adjusted.
- The user can easily set the drilling depth without even have to remove the depth stop.

### Applications

- Drilling in series for wood terrace.

 Exotic wood, Hard wood

Shank




Quick Lock  
1/4" - 6.35



Twistpack

| Ø                  | Ref.     | Gencod        | Qty |
|--------------------|----------|---------------|-----|
| <b>Decking kit</b> |          |               |     |
| 4                  | 902D04   | 3336600173842 | 1   |
| 4.5                | 902D04.5 | 3336600187344 | 1   |

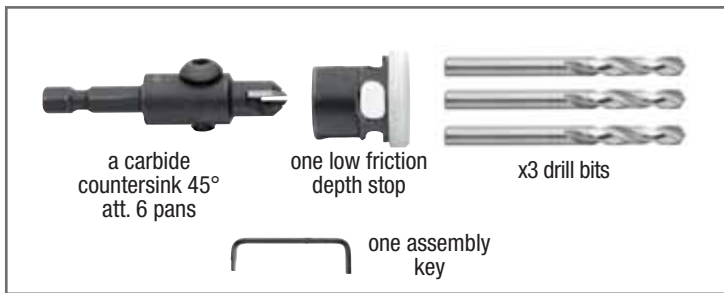

ALL SETS  
PAGES 162-163



9000A

see our video on  
**YouTube**

Ref.  
911

# Accessories for decking kit

Replacement drill bits for Diager decking kit 902D.



| Ø                             | Ref.     | Gencod        | Qty |
|-------------------------------|----------|---------------|-----|
| <b>Decking bit (x3 items)</b> |          |               |     |
| 4                             | 911D04   | 3336600173859 | 1   |
| 4.5                           | 911D04.5 | 3336600187351 | 1   |

**CARBIDE COUNTERSINK 45°**

**DRILL BIT Ø4 mm**  
Compatible screws  
Ø 4.5 until 6 mm

**DEPTH STOP**  
Free rotation  
= anti-friction

**QUICK-LOCK 6,35**  
Optimal holding  
in the chuck

**QUICK LOCK**

Pre-drilling is recommended in hard woods.

**Adjustable depth**

A first drilling is recommended for the hard woods.



# WOOD



925C



905D



907B


917B

910D



9000A


| Features               | Pcs | Type      | Composition  | Ref.  | Gencod        |
|------------------------|-----|-----------|--|-------|---------------|
| FLAT WOOD BIT          | 9   | Set       | 9 FLATS BIT QUICK-LOCK Ø14-16-18-20-22-24-26-28-30mm   | 925C  | 3336600168428 |
| 3 POINT WOOD DRILL BIT | 7   | Set metal | BRAD POINT BIT Ø4-5-6-8-10-12mm  | 905D  | 3336600007680 |
| 3 POINT WOOD DRILL BIT | 5   | Solo      | BRAD POINT BIT Ø3-4-5-6-8mm  | 907B  | 3336600108455 |
| 3 POINT WOOD DRILL BIT | 8   | Duo       | BRAD POINT BIT Ø3-4-5-6-8-10mm   | 917B  | 3336600075702 |
| 4 POINT WOOD DRILL BIT | 5   | Solo      | 4 WOOD Ø3-4-5-6-8mm  | 910D  | 3336600157040 |
| DECKING KIT            | 15  | kit       | Complete kit :3 x Ø4mm bits, One 45° chamfer - carbide plates - Ø4mm quick lock attachment, One «low friction» | 9000A | 3336600199620 |

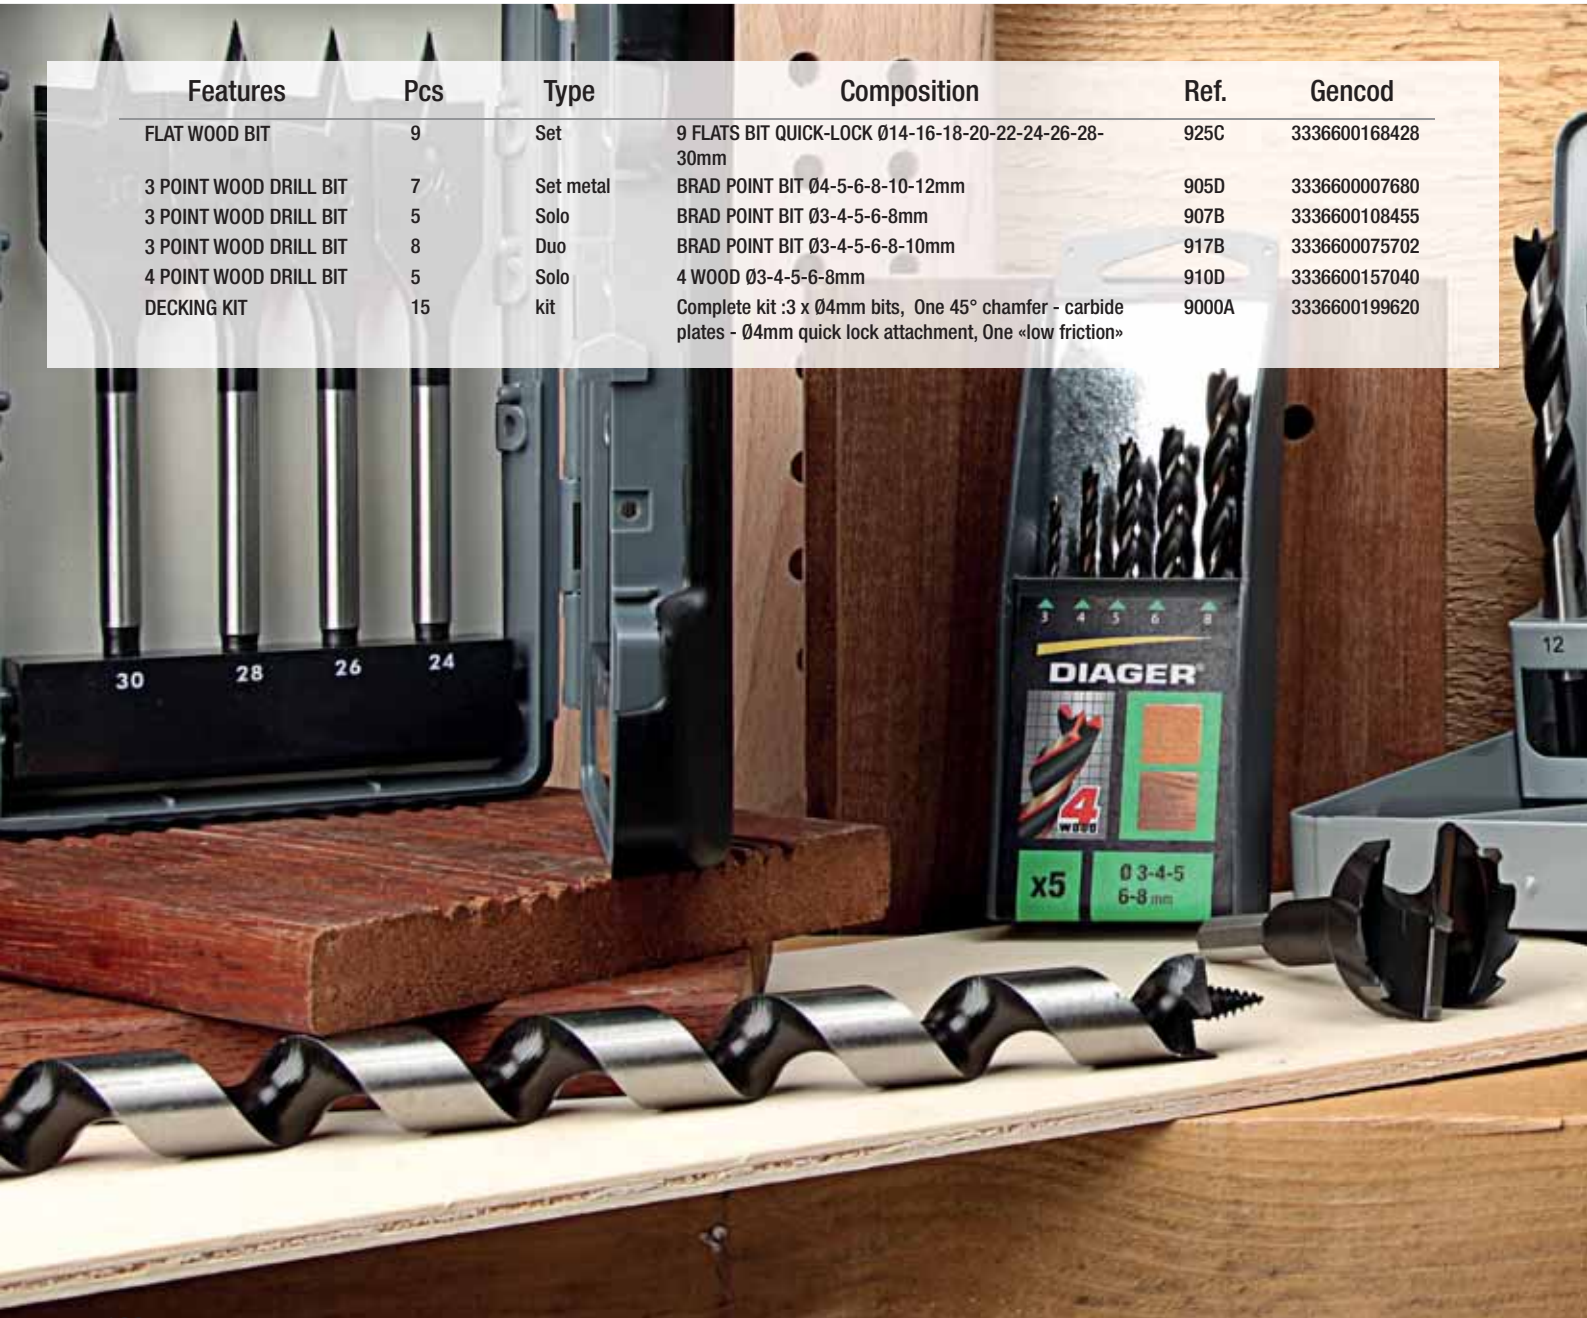





| Features               | Pcs | Type | Composition  | Ref. | Gencod        |
|------------------------|-----|------|--|------|---------------|
| AUGER BIT PRO HEX      | 5   | Case | AUGER BIT PRO HEXA L460mm Ø12-14-16-18-20mm                | 913C | 3336600157583 |
| AUGER BIT PRO SDS PLUS | 5   | Case | AUGER BIT PRO compatible SDS-plus L400mm Ø12-14-16-18-20mm | 943C | 3336600157590 |
| FORSTNER WOODMAX       | 5   | Case | FORSTNER WOODMAX Ø15-20-25-30-35mm                         | 940D | 3336600146839 |

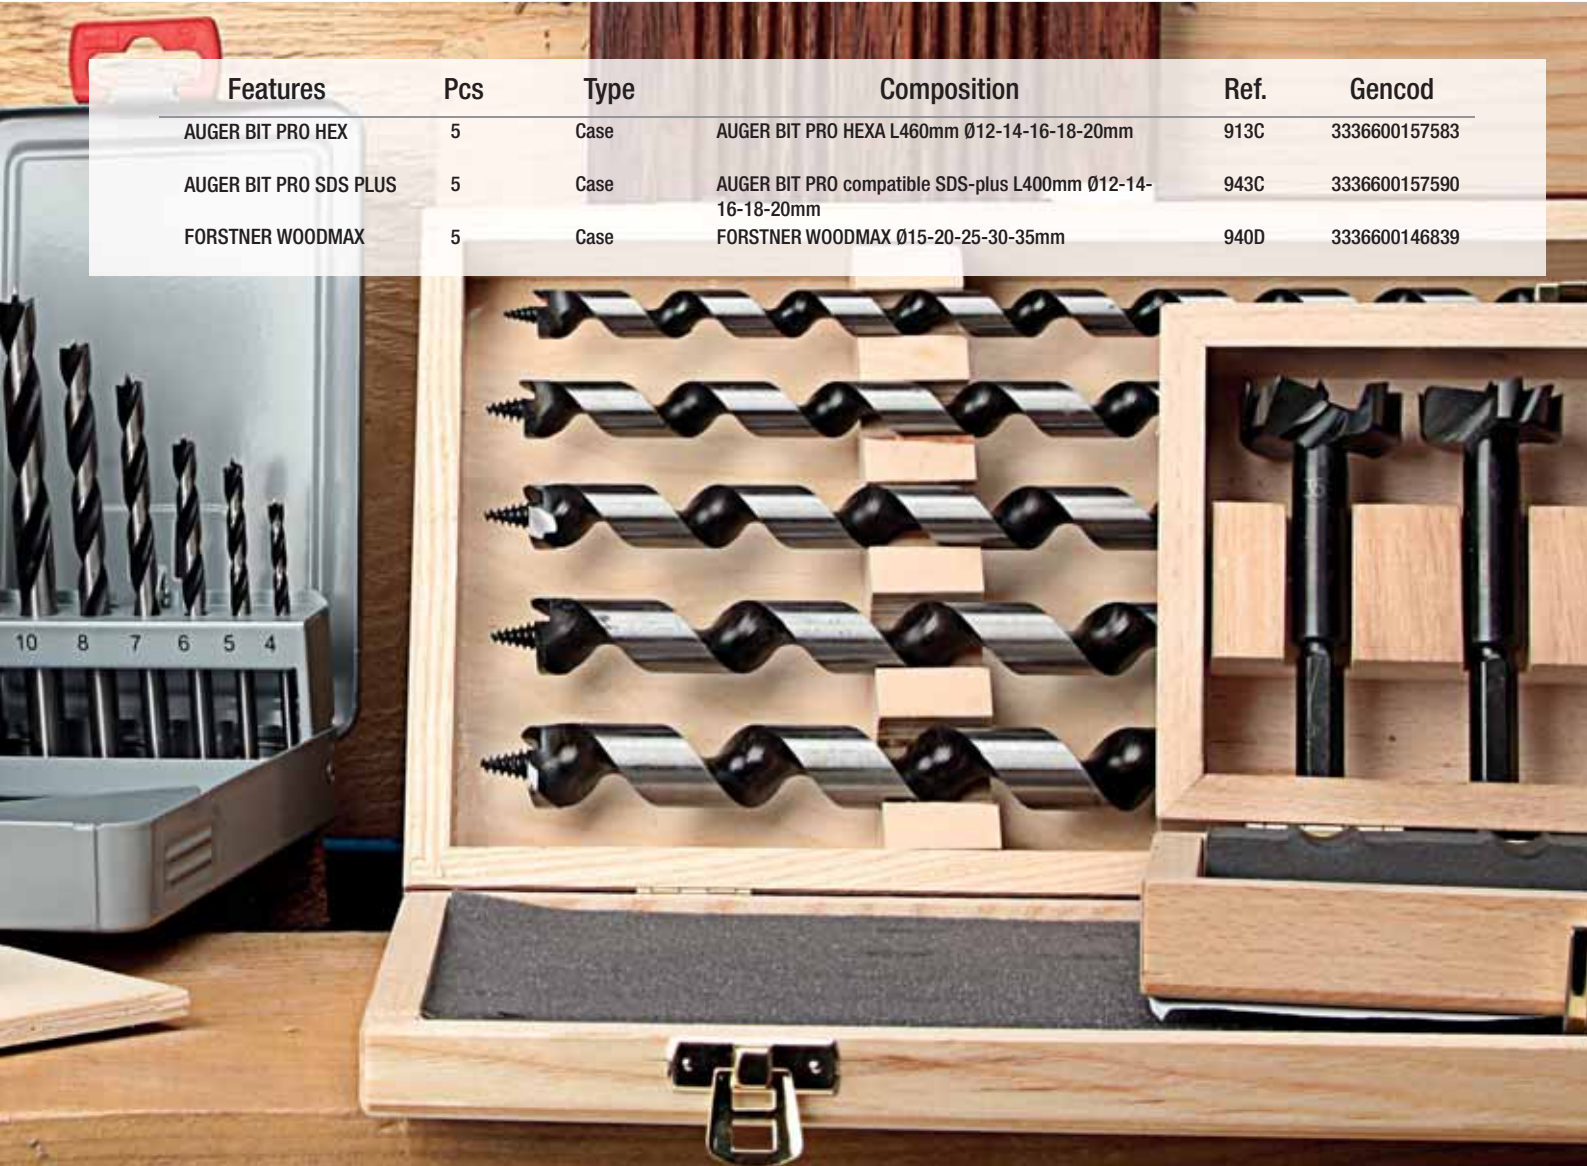

# DRILLING

## Hammer drill bit SDS-plus

| Ø       | Rotation speed rpm |
|---------|--------------------|
| 3       | 850                |
| 4       | 850                |
| 5       | 850                |
| 6       | 850                |
| 7       | 850                |
| 8       | 650                |
| 9       | 650                |
| 10      | 650                |
| 11      | 650                |
| 12      | 650                |
| 13      | 650                |
| 14      | 650                |
| 16      | 650                |
| 18      | 650                |
| 20      | 650                |
| 22      | 650                |
| 24      | 650                |
| 26      | 650                |
| 28      | 650                |
| 30      | 650                |
| 30 et + | 650                |

## Drill bit

| Ø  | Rotation speed rpm |             |
|----|--------------------|-------------|
|    | Short series       | Long series |
| 3  | 3 185              | -           |
| 4  | 2 390              | -           |
| 5  | 1 910              | -           |
| 6  | 1 590              | 800         |
| 7  | 1 365              | 800         |
| 8  | 1 195              | 900         |
| 9  | 1 060              | 900         |
| 10 | 955                | 955         |
| 11 | 870                | 870         |
| 12 | 800                | 800         |
| 13 | 735                | 735         |
| 14 | 680                | 680         |
| 16 | 600                | 600         |
| 18 | 530                | 530         |
| 20 | 475                | 475         |
| 22 | 435                | 430         |
| 24 | 400                | 400         |
| 26 | 365                | 370         |
| 28 | 340                | 340         |
| 30 | 320                | 320         |

To note : the rotation speed of the drill bit FQC are limited for security reason in use of drill bits. Indeed, in case of important runout, the drill bit could bend and hit the user.

## HSS drill bit

| Ø  | Rotation speed rpm         |                             |
|----|----------------------------|-----------------------------|
|    | Steel 750N/mm <sup>2</sup> | Steel 1100N/mm <sup>2</sup> |
| 1  | 6 400                      | 3200                        |
| 2  | 3 200                      | 1590                        |
| 3  | 2 120                      | 1060                        |
| 4  | 1 590                      | 795                         |
| 5  | 1 275                      | 635                         |
| 6  | 1 060                      | 530                         |
| 7  | 910                        | 455                         |
| 8  | 800                        | 400                         |
| 9  | 700                        | 355                         |
| 10 | 640                        | 320                         |
| 11 | 580                        | 290                         |
| 12 | 530                        | 265                         |
| 13 | 500                        | 245                         |
| 14 | 455                        | 225                         |
| 16 | 400                        | 200                         |
| 18 | 355                        | 175                         |
| 20 | 320                        | 160                         |
| 22 | 290                        | 145                         |
| 24 | 265                        | 135                         |
| 26 | 245                        | 120                         |
| 28 | 225                        | 115                         |
| 30 | 210                        | 105                         |

Drilling only in rotation.

## Multimaterials drill bit

| Ø  | Rotation speed rpm |                            |                             |       |           |         |
|----|--------------------|----------------------------|-----------------------------|-------|-----------|---------|
|    | Plastic            | Steel 750N/mm <sup>2</sup> | Steel 1100N/mm <sup>2</sup> | Glass | Hard wood | Plywood |
| 4  | 4 775              | 1 590                      | 795                         | 400   | 3 000     | 3 000   |
| 6  | 3 185              | 1 060                      | 530                         | 285   | 3 000     | 3 000   |
| 8  | 2 385              | 800                        | 400                         | 220   | 3 000     | 3 000   |
| 10 | 1 910              | 640                        | 320                         | 170   | 3 000     | 3 000   |
| 12 | 1 590              | 530                        | 265                         | 140   | 1 500     | 1 500   |
| 14 | 1 365              | 455                        | 225                         | 125   | 1 500     | 1 500   |
| 16 | 1 195              | 400                        | 200                         | 110   | 1 500     | 1 500   |

Drilling only in rotation.

## Glass drill bit

| Ø  | Rotation speed rpm |
|----|--------------------|
| 3  | 500                |
| 4  | 400                |
| 5  | 330                |
| 6  | 285                |
| 8  | 220                |
| 10 | 170                |
| 12 | 140                |
| 14 | 125                |

Drilling only in rotation in non-tempered glass with water, in ceramic (porcelain), in faience.



# ROTATION SPEED

## Tips and maintenance hammer drill

### MAINTENANCE OF THE HAMMER DRILL

For more efficient drilling, maintain the chuck of your drill or hammer drill to keep it clean and lubricated. Replace worn parts. You always have a dust cap in good condition on the chuck that reduces its wear and get better performance with the drill bit.

### THE DRILL BIT

A twisted drill bit will not make a circular hole.

Always keep the attachment of your drills bits clean on the cleaner with a cloth and lubricated with the recommended grease.

### TIPS FOR IMPLEMENTATION

Always use a machine compatible with the drill bit used, for this it is advisable to consult the instructions to use of the machine. See also our compatibility tables.

For demonstrations, never drill beyond the cutting length of the bit. Drilling deeper can result in obstruction of the hole and premature failure of the drill.

When drilling, it is strongly recommended to carry out frequent deburrings.

The pressure exerted on the machine must be constant and uniform. For better performance, it is important to let the punch work, so the pressure on the machine should not be too strong. Excessive pressure can also cause heat of the drill bit and on the carbide tip and increase the risk of breakage.

You must be in a stable and adequate position while drilling.

The drilling must be done in an axis perpendicular to the material to be drilled. Drilling in an oblique axis will damage the drill bit.



## Flat bit

| Ø  | Rotation speed rpm |
|----|--------------------|
| 8  | 2785               |
| 9  | 2500               |
| 10 | 2230               |
| 11 | 2030               |
| 12 | 1860               |
| 13 | 1715               |
| 14 | 1590               |
| 16 | 1395               |
| 18 | 1240               |
| 20 | 1115               |
| 22 | 1015               |
| 24 | 930                |
| 26 | 860                |
| 28 | 800                |
| 30 | 745                |
| 32 | 700                |
| 35 | 640                |

Drilling only in rotation.

## Auger bit

| Ø  | Rotation speed rpm |           |
|----|--------------------|-----------|
|    | Low density wood   | Hard wood |
| 8  | 3 000              | 2 090     |
| 9  | 2 970              | 2 040     |
| 10 | 2 900              | 1 900     |
| 11 | 2 880              | 1 765     |
| 12 | 2 825              | 1 615     |
| 13 | 2 735              | 1 500     |
| 14 | 2 630              | 1 410     |
| 15 | 2 500              | 1 250     |
| 16 | 2 425              | 1 205     |
| 17 | 2 325              | 1 130     |
| 18 | 1 060              | 1 060     |
| 19 | 1 000              | 1 000     |
| 20 | 900                | 900       |
| 21 | 880                | 880       |
| 22 | 855                | 855       |
| 23 | 810                | 810       |
| 24 | 780                | 780       |
| 25 | 700                | 700       |

These rotation speed doesn't apply to drilling: treated wood, exotic woods, green wood, glued laminate wood. Drilling only in rotation.

## Wood drill bit

| Ø  | Rotation speed rpm |           |
|----|--------------------|-----------|
|    | Low density wood   | Hard wood |
| 3  | 5 625              | 4 985     |
| 4  | 4 220              | 3 740     |
| 5  | 3 375              | 2 990     |
| 6  | 2 810              | 2 495     |
| 7  | 2 410              | 2 135     |
| 8  | 2 110              | 1 870     |
| 9  | 1 875              | 1 660     |
| 10 | 1 690              | 1 495     |
| 11 | 1 535              | 1 360     |
| 12 | 1 405              | 1 245     |
| 13 | 1 300              | 1 150     |
| 14 | 1 205              | 1 070     |
| 16 | 1 055              | 935       |
| 18 | 935                | 830       |
| 20 | 845                | 750       |

Drilling only in rotation.





# SCREW BITS RANGE

Made in GERMANY




## IMPACT bits

Length 30 and 50 mm

P. 170-172

For use on an impact driver and high power screwdriver.  
DIN 3126 C6.3 compatible E6.3 -  
DIN 3126 E6.3

BLUE SHOCK

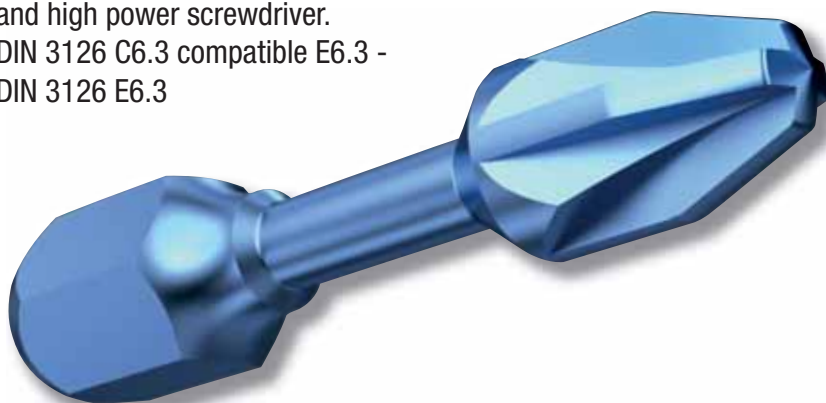


-  SLOTTED
-  PHILIPS
-  POZIDRIV
-  TORX
-  HEXA
-  SQUARE



## STAINLESS STEEL bits

No risk of rust, allows outside work. Recommended to use with stainless steel screws.  
DIN 3126 C6.3

Page 175

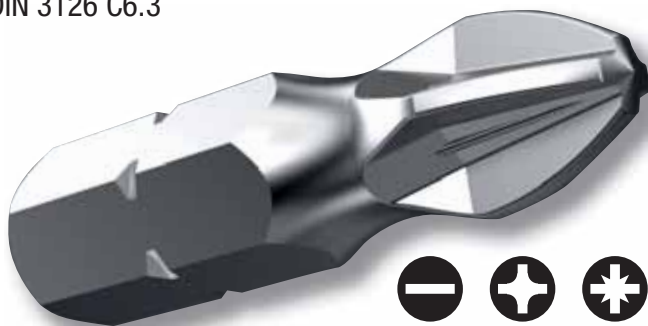

-  SLOTTED
-  PHILIPS
-  POZIDRIV
-  TORX



Made in  
**GERMANY**



**TORSION  
FLEX**


Torsion geometry  
for higher  
strength against  
the tightening  
torque.

# PRO bits

P. 174-179

**Length 25 until 150 mm**

Adapts perfectly to all DIN screws.  
Standard DIN hardness. Optimal concentricity.  
Perfect transmission of the tightening torque.  
DIN 3126 C6.3 - DIN 3126 E6.3

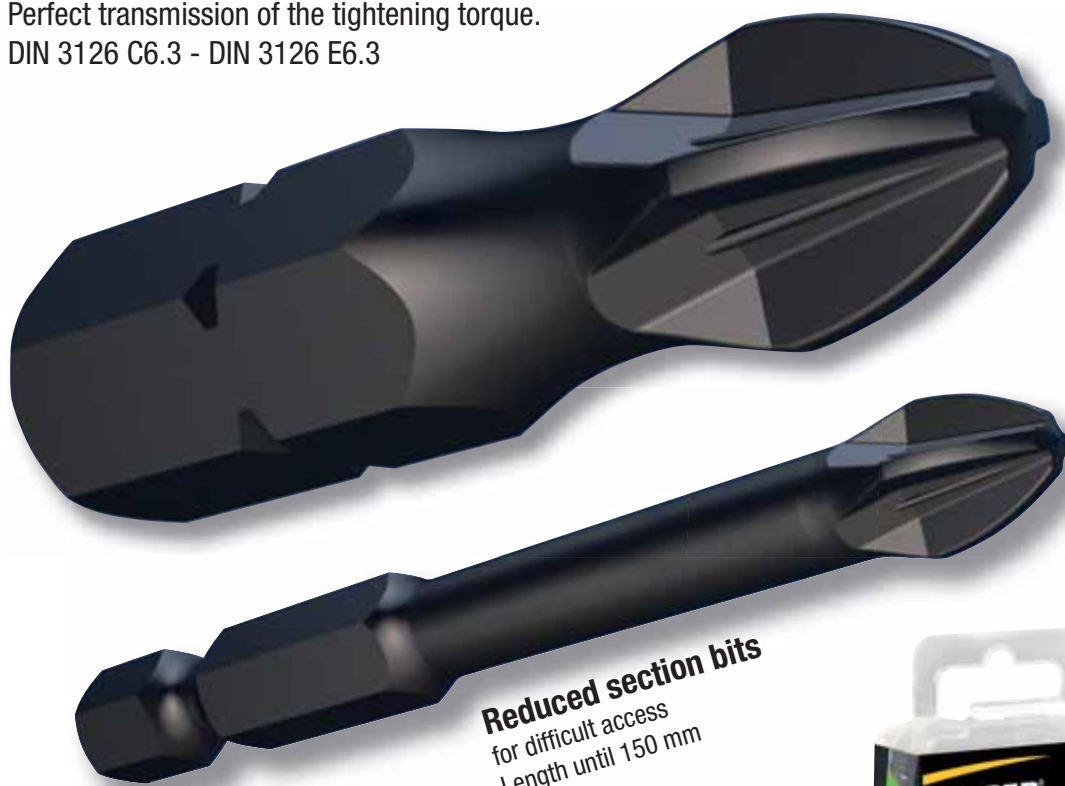

-   
SLOTTED
-   
PHILIPS
-   
POZIDRIV
-   
TORX
-   
TORX  
TAMPER
-   
TORX  
TTAP
-   
HEXA
-   
SQUARE
-   
SPANNER








# Impact bit **BLUE SHOCK**

## Anti-Breakage

The flex zone is reinforced on each side for an even stronger link with the head and the attachment and avoid breakages.

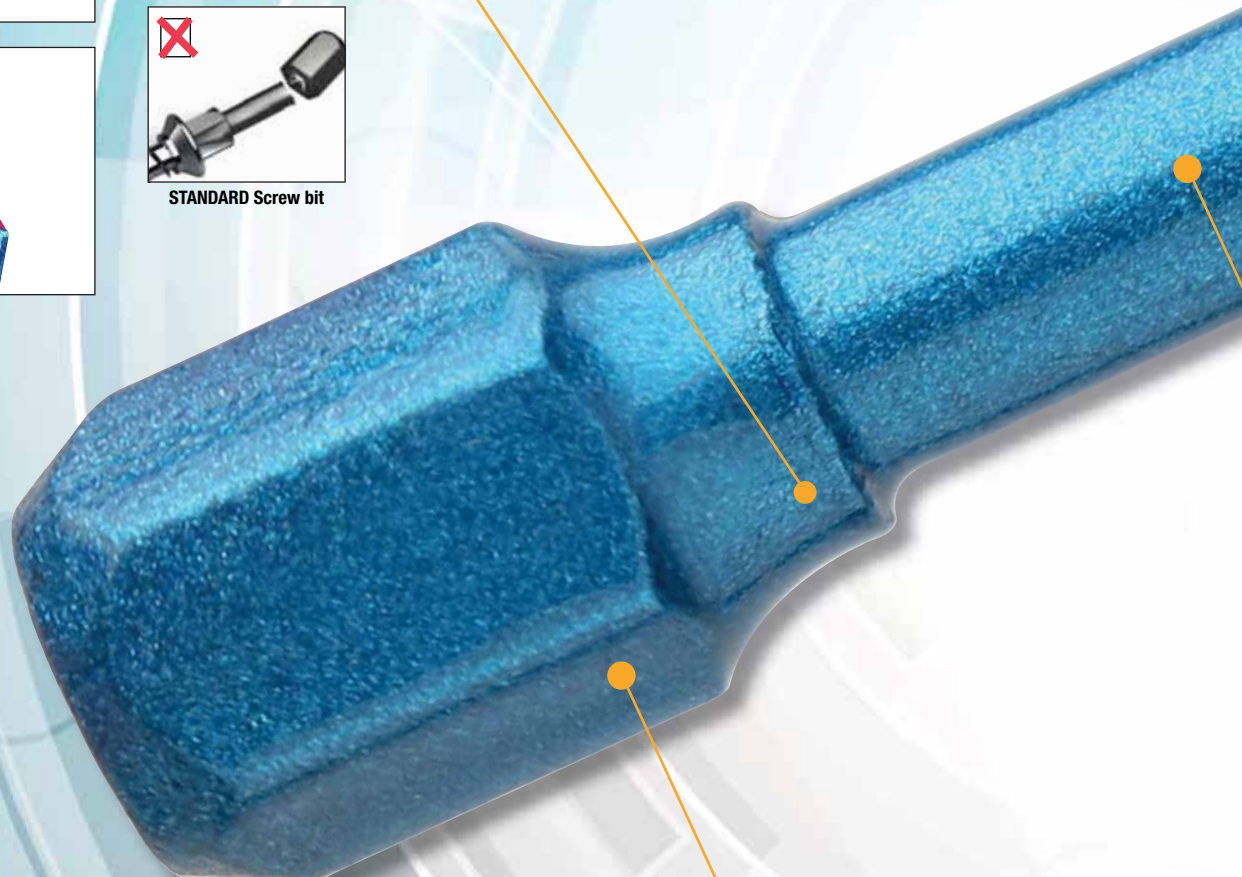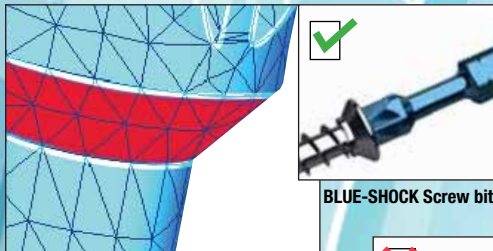

## Special impact screwdriver shank

Adapts perfectly to the quick lock system of impact screwdrivers thanks to a DIN E 6.3 compatible shank.



BLUE-SHOCK screw bit  
Compatible DIN E 6.3



DIN C 6.3 screw bit

### Range available with




PH PZ TX SQ HEX




## Reinforcement

A strong ring reinforces the head for an even longer resistance.



BLUE-SHOCK Screw bit



STANDARD Screw bit

## Upper length

Thanks to its longer length (30 mm), the bit protrudes perfectly from the screwdriver chuck.



BLUE-SHOCK Screw bit  
30 mm



Screw bit 25 mm

## Clean and precise screwing

PH, PZ, TX perfectly fits screwheads and avoid slipping and destroying head geometry.



## Resist to violent impacts

The Blueshock screw bit offers a special design with elongated torsion zone, resisting to high torque and violent impacts. Its hardness suits the most powerful machines



**Made in  
GERMANY**

Ref.  
U610



## Blue-Shock impact bit Phillips - 30 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 30 mm. They are designed to give a greater wear resistance and strength than standard bits.



|                  | TL | Ref.      | Gencod        | Qty |
|------------------|----|-----------|---------------|-----|
| <b>5 pieces</b>  |    |           |               |     |
| PH2              | 30 | U610PH2   | 3336600172043 | 1   |
| PH3              | 30 | U610PH3   | 3336600172067 | 1   |
| <b>10 pieces</b> |    |           |               |     |
| PH2              | 30 | U610PH210 | 3336600172050 | 1   |
| <b>25 pieces</b> |    |           |               |     |
| PH2              | 30 | U610PH225 | 3336600187634 | 1   |

Ref.  
U612



## Blue-Shock impact bit Pozidriv - 30 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 30 mm. They are designed to give a greater wear resistance and strength than standard bits.



|                  | TL | Ref.      | Gencod        | Qty |
|------------------|----|-----------|---------------|-----|
| <b>5 pieces</b>  |    |           |               |     |
| PZ2              | 30 | U612PZ2   | 3336600172074 | 1   |
| PZ3              | 30 | U612PZ3   | 3336600172098 | 1   |
| <b>10 pieces</b> |    |           |               |     |
| PZ2              | 30 | U612PZ210 | 3336600172081 | 1   |
| <b>25 pieces</b> |    |           |               |     |
| PZ2              | 30 | U612PZ225 | 3336600187627 | 1   |

Ref.  
U613



## Blue-Shock impact bit Torx - 30 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 30 mm. They are designed to give a greater wear resistance and strength than standard bits.



|                  | TL | Ref.      | Gencod        | Qty |
|------------------|----|-----------|---------------|-----|
| <b>5 pieces</b>  |    |           |               |     |
| T10              | 30 | U613T10   | 3336600172104 | 1   |
| T15              | 30 | U613T15   | 3336600172111 | 1   |
| T20              | 30 | U613T20   | 3336600172128 | 1   |
| T25              | 30 | U613T25   | 3336600172135 | 1   |
| T30              | 30 | U613T30   | 3336600172142 | 1   |
| T40              | 30 | U613T40   | 3336600172159 | 1   |
| <b>25 pieces</b> |    |           |               |     |
| T20              | 30 | U613T2025 | 3336600189836 | 1   |
| T25              | 30 | U613T2525 | 3336600189843 | 1   |
| T30              | 30 | U613T3025 | 3336600189850 | 1   |

Ref.  
U610



## Blue-Shock impact bit Phillips - 50 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 50 mm. They are designed to give a greater wear resistance and strength than standard bits.



Plastic box

|                 | TL | Ref.        | Gencod        | Qty |
|-----------------|----|-------------|---------------|-----|
| <b>3 pieces</b> |    |             |               |     |
| PH2             | 50 | U610PH2L050 | 3336600196018 | 1   |
| PH3             | 50 | U610PH3L050 | 3336600196025 | 1   |

Ref.  
U612



## Blue-Shock impact bit Phillips - 50 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 50 mm. They are designed to give a greater wear resistance and strength than standard bits.



Plastic box

|                 | TL | Ref.        | Gencod        | Qty |
|-----------------|----|-------------|---------------|-----|
| <b>3 pieces</b> |    |             |               |     |
| PZ2             | 50 | U612PZ2L050 | 3336600196032 | 1   |
| PZ3             | 50 | U612PZ3L050 | 3336600196049 | 1   |

Ref.  
U613



## Blue-Shock impact bit Torx - 50 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 50 mm. They are designed to give a greater wear resistance and strength than standard bits.



Plastic box

|                 | TL | Ref.        | Gencod        | Qty |
|-----------------|----|-------------|---------------|-----|
| <b>3 pieces</b> |    |             |               |     |
| T10             | 50 | U613T10L050 | 3336600196094 | 1   |
| T15             | 50 | U613T15L050 | 3336600196100 | 1   |
| T20             | 50 | U613T20L050 | 3336600196117 | 1   |
| T25             | 50 | U613T25L050 | 3336600196124 | 1   |
| T30             | 50 | U613T30L050 | 3336600196131 | 1   |
| T40             | 50 | U613T40L050 | 3336600196148 | 1   |



Ref.  
U615



## Blue-Shock impact bit Hexa - 50 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 50 mm. They are designed to give a greater wear resistance and strength than standard bits.



Plastic box

|                 | TL | Ref.          | Gencod        | Qty |
|-----------------|----|---------------|---------------|-----|
| <b>3 pieces</b> |    |               |               |     |
| HEX3            | 50 | U615HEX03L050 | 3336600196056 | 1   |
| HEX4            | 50 | U615HEX04L050 | 3336600196063 | 1   |
| HEX5            | 50 | U615HEX05L050 | 3336600196070 | 1   |
| HEX6            | 50 | U615HEX06L050 | 3336600196087 | 1   |

Ref.  
U617



## Blue-Shock impact bit Square - 50 mm length

Specifically made to handle the force from impact drivers and powerfull screwdriver Blue Shock bits have a length of 50 mm. They are designed to give a greater wear resistance and strength than standard bits.



Plastic box

|                 | TL | Ref.        | Gencod        | Qty |
|-----------------|----|-------------|---------------|-----|
| <b>3 pieces</b> |    |             |               |     |
| SQ1             | 50 | U617SQ1L050 | 3336600195981 | 1   |
| SQ2             | 50 | U617SQ2L050 | 3336600196995 | 1   |
| SQ3             | 50 | U617SQ3L050 | 3336600196001 | 1   |

Ref.  
U621B

## Blue-Shock bit holder 60 mm

Bit holder specifically made to handle the force from impact drivers and powerfull screwdriver.



Plastic box

| TL | Ref.  | Gencod        | Qty |
|----|-------|---------------|-----|
| 60 | U621B | 3336600192379 | 1   |

ALL  
SETS  
PAGES 188-189



U618C







Ref.  
U650

## Stainless steel bits - length 25 mm

Fasten stainless screws with stainless bits to avoid rust problem.



|                            | TL | Ref.      | Gencod        | Qty |
|----------------------------|----|-----------|---------------|-----|
| <b>Phillips - 5 pieces</b> |    |           |               |     |
| PH1                        | 25 | U650PH1   | 3336600189881 | 1   |
| PH2                        | 25 | U650PH2   | 3336600189898 | 1   |
| PH3                        | 25 | U650PH3   | 3336600189904 | 1   |
| <b>Pozidriv - 5 pieces</b> |    |           |               |     |
| PZ2                        | 25 | U650PZ2   | 3336600189928 | 1   |
| PZ3                        | 25 | U650PZ3   | 3336600189935 | 1   |
| <b>Torx - 5 pieces</b>     |    |           |               |     |
| T10                        | 25 | U650T10   | 3336600189942 | 1   |
| T15                        | 25 | U650T15   | 3336600189959 | 1   |
| T20                        | 25 | U650T20   | 3336600189966 | 1   |
| T25                        | 25 | U650T25   | 3336600189973 | 1   |
| T30                        | 25 | U650T30   | 3336600189980 | 1   |
| T40                        | 25 | U650T40   | 3336600190993 | 1   |
| <b>Plat - 5 pieces</b>     |    |           |               |     |
| PL                         | 25 | U650PL5   | 3336600190016 | 1   |
| PL                         | 25 | U650PL5.5 | 3336600190023 | 1   |
| PL                         | 25 | U650PL6.5 | 3336600190030 | 1   |

Ref.  
U640

## Torsion bits 25 & 50 mm for Phillips screws

Torsion bits geometry allows better resistance to high torque and peak loads.



TORSION  
FLEX



|                            | TL | Ref.          | Gencod        | Qty |
|----------------------------|----|---------------|---------------|-----|
| <b>L 25 mm - 5 pieces</b>  |    |               |               |     |
| PH0                        | 25 | U640PH0       | 3336600186187 | 1   |
| PH1                        | 25 | U640PH1       | 3336600171909 | 1   |
| PH2                        | 25 | U640PH2       | 3336600171916 | 1   |
| PH3                        | 25 | U640PH3       | 3336600171930 | 1   |
| <b>L 25 mm - 10 pieces</b> |    |               |               |     |
| PH2                        | 25 | U640PH210     | 3336600171923 | 1   |
| <b>L 25 mm - 25 pieces</b> |    |               |               |     |
| PH1                        | 25 | U640PH125     | 3336600176072 | 1   |
| PH2                        | 25 | U640PH225     | 3336600189867 | 1   |
| PH3                        | 25 | U640PH325     | 3336600189874 | 1   |
| <b>L 50 mm - 5 pieces</b>  |    |               |               |     |
| PH1                        | 50 | U640PH1L050   | 3336600172166 | 1   |
| PH2                        | 50 | U640PH2L050   | 3336600172173 | 1   |
| PH3                        | 50 | U640PH3L050   | 3336600172197 | 1   |
| <b>L 50 mm - 10 pieces</b> |    |               |               |     |
| PH2                        | 50 | U640PH2L05010 | 3336600172180 | 1   |
| <b>L 50 mm - 25 pieces</b> |    |               |               |     |
| PH2                        | 50 | U640PH2L05025 | 3336600176157 | 1   |
| PH3                        | 50 | U640PH3L05025 | 3336600191594 | 1   |

Ref.  
U642

## Torsion bits 25 & 50 mm for Pozidriv screws

Torsion bits geometry allows better resistance to high torque and peak loads.



TORSION  
FLEX



|                            | TL | Ref.          | Gencod        | Qty |
|----------------------------|----|---------------|---------------|-----|
| <b>L 25 mm - 5 pieces</b>  |    |               |               |     |
| PZ1                        | 25 | U642PZ1       | 3336600171947 | 1   |
| PZ2                        | 25 | U642PZ2       | 3336600171954 | 1   |
| PZ3                        | 25 | U642PZ3       | 3336600171978 | 1   |
| <b>L 25 mm - 10 pieces</b> |    |               |               |     |
| PZ2                        | 25 | U642PZ210     | 3336600171961 | 1   |
| <b>L 25 mm - 25 pieces</b> |    |               |               |     |
| PZ1                        | 25 | U642PZ125     | 3336600176096 | 1   |
| PZ2                        | 25 | U642PZ225     | 3336600187191 | 1   |
| PZ3                        | 25 | U642PZ325     | 3336600176119 | 1   |
| <b>L 50 mm - 5 pieces</b>  |    |               |               |     |
| PZ1                        | 50 | U642PZ1L050   | 3336600172203 | 1   |
| PZ2                        | 50 | U642PZ2L050   | 3336600172210 | 1   |
| PZ3                        | 50 | U642PZ3L050   | 3336600172234 | 1   |
| <b>L 50 mm - 10 pieces</b> |    |               |               |     |
| PZ2                        | 50 | U642PZ2L05010 | 3336600172227 | 1   |
| <b>L 50 mm - 25 pieces</b> |    |               |               |     |
| PZ2                        | 50 | U642PZ2L05025 | 3336600176164 | 1   |



Ref.  
**U643**

# Torsion bits 25 & 50 mm for Torx® screws

Torsion bits geometry allows better resistance to high torque and peak loads.



**TORSION  
FLEX**

|                            | TL | Ref.      | Gencod        | Qty |
|----------------------------|----|-----------|---------------|-----|
| <b>L 25 mm - 5 pieces</b>  |    |           |               |     |
| T10                        | 25 | U643T10   | 3336600171985 | 1   |
| T15                        | 25 | U643T15   | 3336600171992 | 1   |
| T20                        | 25 | U643T20   | 3336600172005 | 1   |
| T25                        | 25 | U643T25   | 3336600172012 | 1   |
| T27                        | 25 | U643T27   | 3336600187504 | 1   |
| T30                        | 25 | U643T30   | 3336600172029 | 1   |
| T40                        | 25 | U643T40   | 3336600172036 | 1   |
| <b>L 25 mm - 25 pieces</b> |    |           |               |     |
| T10                        | 25 | U643T1025 | 3336600191624 | 1   |
| T15                        | 25 | U643T1525 | 3336600191631 | 1   |
| T20                        | 25 | U643T2025 | 3336600176126 | 1   |
| T25                        | 25 | U643T2525 | 3336600176133 | 1   |
| T30                        | 25 | U643T3025 | 3336600176140 | 1   |
| T40                        | 25 | U643T4025 | 3336600191648 | 1   |



Plastic box

|                           | TL | Ref.        | Gencod        | Qty |
|---------------------------|----|-------------|---------------|-----|
| <b>L 50 mm - 5 pieces</b> |    |             |               |     |
| T10                       | 50 | U643T10L050 | 3336600172241 | 1   |
| T15                       | 50 | U643T15L050 | 3336600172258 | 1   |
| T20                       | 50 | U643T20L050 | 3336600172265 | 1   |
| T25                       | 50 | U643T25L050 | 3336600172272 | 1   |
| T30                       | 50 | U643T30L050 | 3336600172289 | 1   |
| T40                       | 50 | U643T40L050 | 3336600172296 | 1   |

Ref.  
**U641**

# Torsion bits 25 & 50 mm for Slotted screws

Torsion bits geometry allows better resistance to high torque and peak loads.



**TORSION  
FLEX**

|                           | TL | Ref.        | Gencod        | Qty |
|---------------------------|----|-------------|---------------|-----|
| <b>L 25 mm - 5 pieces</b> |    |             |               |     |
| PL                        | 25 | U641PL2     | 3336600171879 | 1   |
| PL                        | 25 | U641PL3     | 3336600171886 | 1   |
| PL                        | 25 | U641PL4     | 3336600171893 | 1   |
| <b>L 50 mm - 5 pieces</b> |    |             |               |     |
| PL                        | 50 | U641PL2L050 | 3336600181601 | 1   |
| PL                        | 50 | U641PL3L050 | 3336600181618 | 1   |
| PL                        | 50 | U641PL4L050 | 3336600181625 | 1   |



Plastic box

**ALL  
SETS**  
PAGES 190-191



U642C



U643D

Ref.  
U620



Phillipps industry bits length 50 to 150 mm with reduced shank



| TL                        | Ref.           | Gencod        | Qty |
|---------------------------|----------------|---------------|-----|
| <b>L 50 mm - 5 pieces</b> |                |               |     |
| PH0                       | 90 U620PH0L050 | 3336600186132 | 1   |

| TL                        | Ref.           | Gencod        | Qty |
|---------------------------|----------------|---------------|-----|
| <b>L 70 mm - 3 pieces</b> |                |               |     |
| PH1                       | 70 U620PH1L070 | 3336600181694 | 1   |
| PH2                       | 70 U620PH2L070 | 3336600181700 | 1   |
| PH3                       | 70 U620PH3L070 | 3336600181717 | 1   |

| TL                         | Ref.            | Gencod        | Qty |
|----------------------------|-----------------|---------------|-----|
| <b>L 110 mm - 3 pieces</b> |                 |               |     |
| PH1                        | 110 U620PH1L110 | 3336600172371 | 1   |
| PH2                        | 110 U620PH2L110 | 3336600172388 | 1   |
| PH3                        | 110 U620PH3L110 | 3336600172395 | 1   |

| TL                          | Ref.              | Gencod        | Qty |
|-----------------------------|-------------------|---------------|-----|
| <b>L 110 mm - 20 pieces</b> |                   |               |     |
| PH2                         | 110 U620PH2L11020 | 3336600178465 | 1   |



Plastic box

| TL                         | Ref.            | Gencod        | Qty |
|----------------------------|-----------------|---------------|-----|
| <b>L 150 mm - 3 pieces</b> |                 |               |     |
| PH1                        | 150 U620PH1L150 | 3336600181724 | 1   |
| PH2                        | 150 U620PH2L150 | 3336600181731 | 1   |
| PH3                        | 150 U620PH3L150 | 3336600181748 | 1   |

Ref.  
U622



Pozidriv industry bits length 70 to 150 mm with reduced shank



| TL                        | Ref.           | Gencod        | Qty |
|---------------------------|----------------|---------------|-----|
| <b>L 70 mm - 3 pieces</b> |                |               |     |
| PZ1                       | 70 U622PZ1L070 | 3336600181755 | 1   |
| PZ2                       | 70 U622PZ2L070 | 3336600181762 | 1   |
| PZ3                       | 70 U622PZ3L070 | 3336600181779 | 1   |

| TL                        | Ref.           | Gencod        | Qty |
|---------------------------|----------------|---------------|-----|
| <b>L 90 mm - 3 pieces</b> |                |               |     |
| PZ1                       | 90 U622PZ1L090 | 3336600187429 | 1   |
| PZ2                       | 90 U622PZ2L090 | 3336600187436 | 1   |
| PZ3                       | 90 U622PZ3L090 | 3336600187443 | 1   |

| TL                         | Ref.            | Gencod        | Qty |
|----------------------------|-----------------|---------------|-----|
| <b>L 110 mm - 3 pieces</b> |                 |               |     |
| PZ1                        | 110 U622PZ1L110 | 3336600172401 | 1   |
| PZ2                        | 110 U622PZ2L110 | 3336600172418 | 1   |
| PZ3                        | 110 U622PZ3L110 | 3336600172425 | 1   |



Plastic box

| TL                         | Ref.            | Gencod        | Qty |
|----------------------------|-----------------|---------------|-----|
| <b>L 150 mm - 3 pieces</b> |                 |               |     |
| PZ1                        | 150 U622PZ1L150 | 3336600181786 | 1   |
| PZ2                        | 150 U622PZ2L150 | 3336600181793 | 1   |
| PZ3                        | 150 U622PZ3L150 | 3336600181809 | 1   |

Ref.  
U623



## Torx® industry bits length 70 to 150 mm with reduced shank



| TL                        | Ref.           | Gencod        | Qty |
|---------------------------|----------------|---------------|-----|
| <b>L 70 mm - 3 pieces</b> |                |               |     |
| T10                       | 70 U623T10L070 | 3336600181816 | 1   |
| T15                       | 70 U623T15L070 | 3336600181823 | 1   |
| T20                       | 70 U623T20L070 | 3336600181830 | 1   |
| T25                       | 70 U623T25L070 | 3336600181847 | 1   |
| T30                       | 70 U623T30L070 | 3336600181854 | 1   |
| T40                       | 70 U623T40L070 | 3336600181861 | 1   |

| TL                        | Ref.           | Gencod        | Qty |
|---------------------------|----------------|---------------|-----|
| <b>L 90 mm - 3 pieces</b> |                |               |     |
| T10                       | 90 U623T10L090 | 3336600181878 | 1   |
| T15                       | 90 U623T15L090 | 3336600181885 | 1   |
| T20                       | 90 U623T20L090 | 3336600181892 | 1   |
| T25                       | 90 U623T25L090 | 3336600181908 | 1   |
| T30                       | 90 U623T30L090 | 3336600181915 | 1   |
| T40                       | 90 U623T40L090 | 3336600181922 | 1   |

| TL                         | Ref.            | Gencod        | Qty |
|----------------------------|-----------------|---------------|-----|
| <b>L 110 mm - 3 pieces</b> |                 |               |     |
| T25                        | 110 U623T25L110 | 3336600187450 | 1   |
| T30                        | 110 U623T30L110 | 3336600187467 | 1   |



Plastic box

| TL                         | Ref.            | Gencod        | Qty |
|----------------------------|-----------------|---------------|-----|
| <b>L 150 mm - 3 pieces</b> |                 |               |     |
| T25                        | 150 U623T25L150 | 3336600187474 | 1   |
| T30                        | 150 U623T30L150 | 3336600187481 | 1   |

Ref.  
U624



## Torx® Tamper industry bits length 50 mm with reduced shank



Plastic box

| TL              | Ref.            | Gencod        | Qty |
|-----------------|-----------------|---------------|-----|
| <b>5 pieces</b> |                 |               |     |
| TT10            | 50 U624TT10L050 | 3336600181939 | 1   |
| TT15            | 50 U624TT15L050 | 3336600181946 | 1   |
| TT20            | 50 U624TT20L050 | 3336600181953 | 1   |
| TT25            | 50 U624TT25L050 | 3336600181960 | 1   |
| TT30            | 50 U624TT30L050 | 3336600181977 | 1   |
| TT40            | 50 U624TT40L050 | 3336600181984 | 1   |

Ref.  
U625



## Hexagonal industry bits length 50 mm with reduced shank



Plastic box

| TL              | Ref.               | Gencod        | Qty |
|-----------------|--------------------|---------------|-----|
| <b>5 pieces</b> |                    |               |     |
| HEX2            | 50 U625HEX02L050   | 3336600181991 | 1   |
| HEX2.5          | 50 U625HEX02.5L050 | 3336600182004 | 1   |
| HEX3            | 50 U625HEX03L050   | 3336600182011 | 1   |
| HEX4            | 50 U625HEX04L050   | 3336600182028 | 1   |
| HEX5            | 50 U625HEX05L050   | 3336600182035 | 1   |
| HEX6            | 50 U625HEX06L050   | 3336600182042 | 1   |
| HEX8            | 50 U625HEX08L050   | 3336600182059 | 1   |



Ref.  
U624



## Torx® Tamper industry bits length 25 mm



Plastic box

|                 | TL | Ref.     | Gencod        | Qty |
|-----------------|----|----------|---------------|-----|
| <b>5 pieces</b> |    |          |               |     |
| TT10            | 25 | U624TT10 | 3336600178472 | 1   |
| TT15            | 25 | U624TT15 | 3336600178489 | 1   |
| TT20            | 25 | U624TT20 | 3336600178496 | 1   |
| TT25            | 25 | U624TT25 | 3336600178502 | 1   |
| TT30            | 25 | U624TT30 | 3336600178519 | 1   |
| TT40            | 25 | U624TT40 | 3336600178526 | 1   |

Ref.  
U625



## Hexagonal industry bits length 25 mm



Plastic box

|                 | TL | Ref.        | Gencod        | Qty |
|-----------------|----|-------------|---------------|-----|
| <b>5 pieces</b> |    |             |               |     |
| HEX2            | 25 | U625HEX02   | 3336600176218 | 1   |
| HEX2.5          | 25 | U625HEX02.5 | 3336600176225 | 1   |
| HEX3            | 25 | U625HEX03   | 3336600176232 | 1   |
| HEX4            | 25 | U625HEX04   | 3336600176249 | 1   |
| HEX5            | 25 | U625HEX05   | 3336600176256 | 1   |
| HEX6            | 25 | U625HEX06   | 3336600176263 | 1   |
| HEX7            | 25 | U625HEX07   | 3336600187320 | 1   |
| HEX8            | 25 | U625HEX08   | 3336600176270 | 1   |

Ref.  
U627



## Square industry bits length 25 & 50 mm



Plastic box

|                           | TL | Ref.        | Gencod        | Qty |
|---------------------------|----|-------------|---------------|-----|
| <b>L 25 mm - 5 pieces</b> |    |             |               |     |
| SQ0                       | 25 | U627SQ0     | 3336600176171 | 1   |
| SQ1                       | 25 | U627SQ1     | 3336600176188 | 1   |
| SQ2                       | 25 | U627SQ2     | 3336600176195 | 1   |
| SQ3                       | 25 | U627SQ3     | 3336600176201 | 1   |
| <b>L 50 mm - 5 pieces</b> |    |             |               |     |
| SQ1                       | 50 | U627SQ1L050 | 3336600193970 | 1   |
| SQ2                       | 50 | U627SQ2L050 | 3336600187498 | 1   |

Ref.  
U628



## Spanner industry bits length 25 mm



Plastic box

|                 | TL | Ref.     | Gencod        | Qty |
|-----------------|----|----------|---------------|-----|
| <b>5 pieces</b> |    |          |               |     |
| SP4             | 25 | U628SP4  | 3336600178533 | 1   |
| SP6             | 25 | U628SP6  | 3336600178540 | 1   |
| SP8             | 25 | U628SP8  | 3336600178557 | 1   |
| SP10            | 25 | U628SP10 | 3336600178564 | 1   |


Ref.  
U626

# Torx® TTAP industry bits length 25 mm



Plastic box

|                 | Lt | Ref.       | Gencod        | Qt. |
|-----------------|----|------------|---------------|-----|
| <b>5 pièces</b> |    |            |               |     |
| TTAP10          | 25 | U626TTAP10 | 3336600194267 | 1   |
| TTAP15          | 25 | U626TTAP15 | 3336600194274 | 1   |
| TTAP20          | 25 | U626TTAP20 | 3336600194281 | 1   |
| TTAP25          | 25 | U626TTAP25 | 3336600195004 | 1   |
| TTAP30          | 25 | U626TTAP30 | 3336600194298 | 1   |

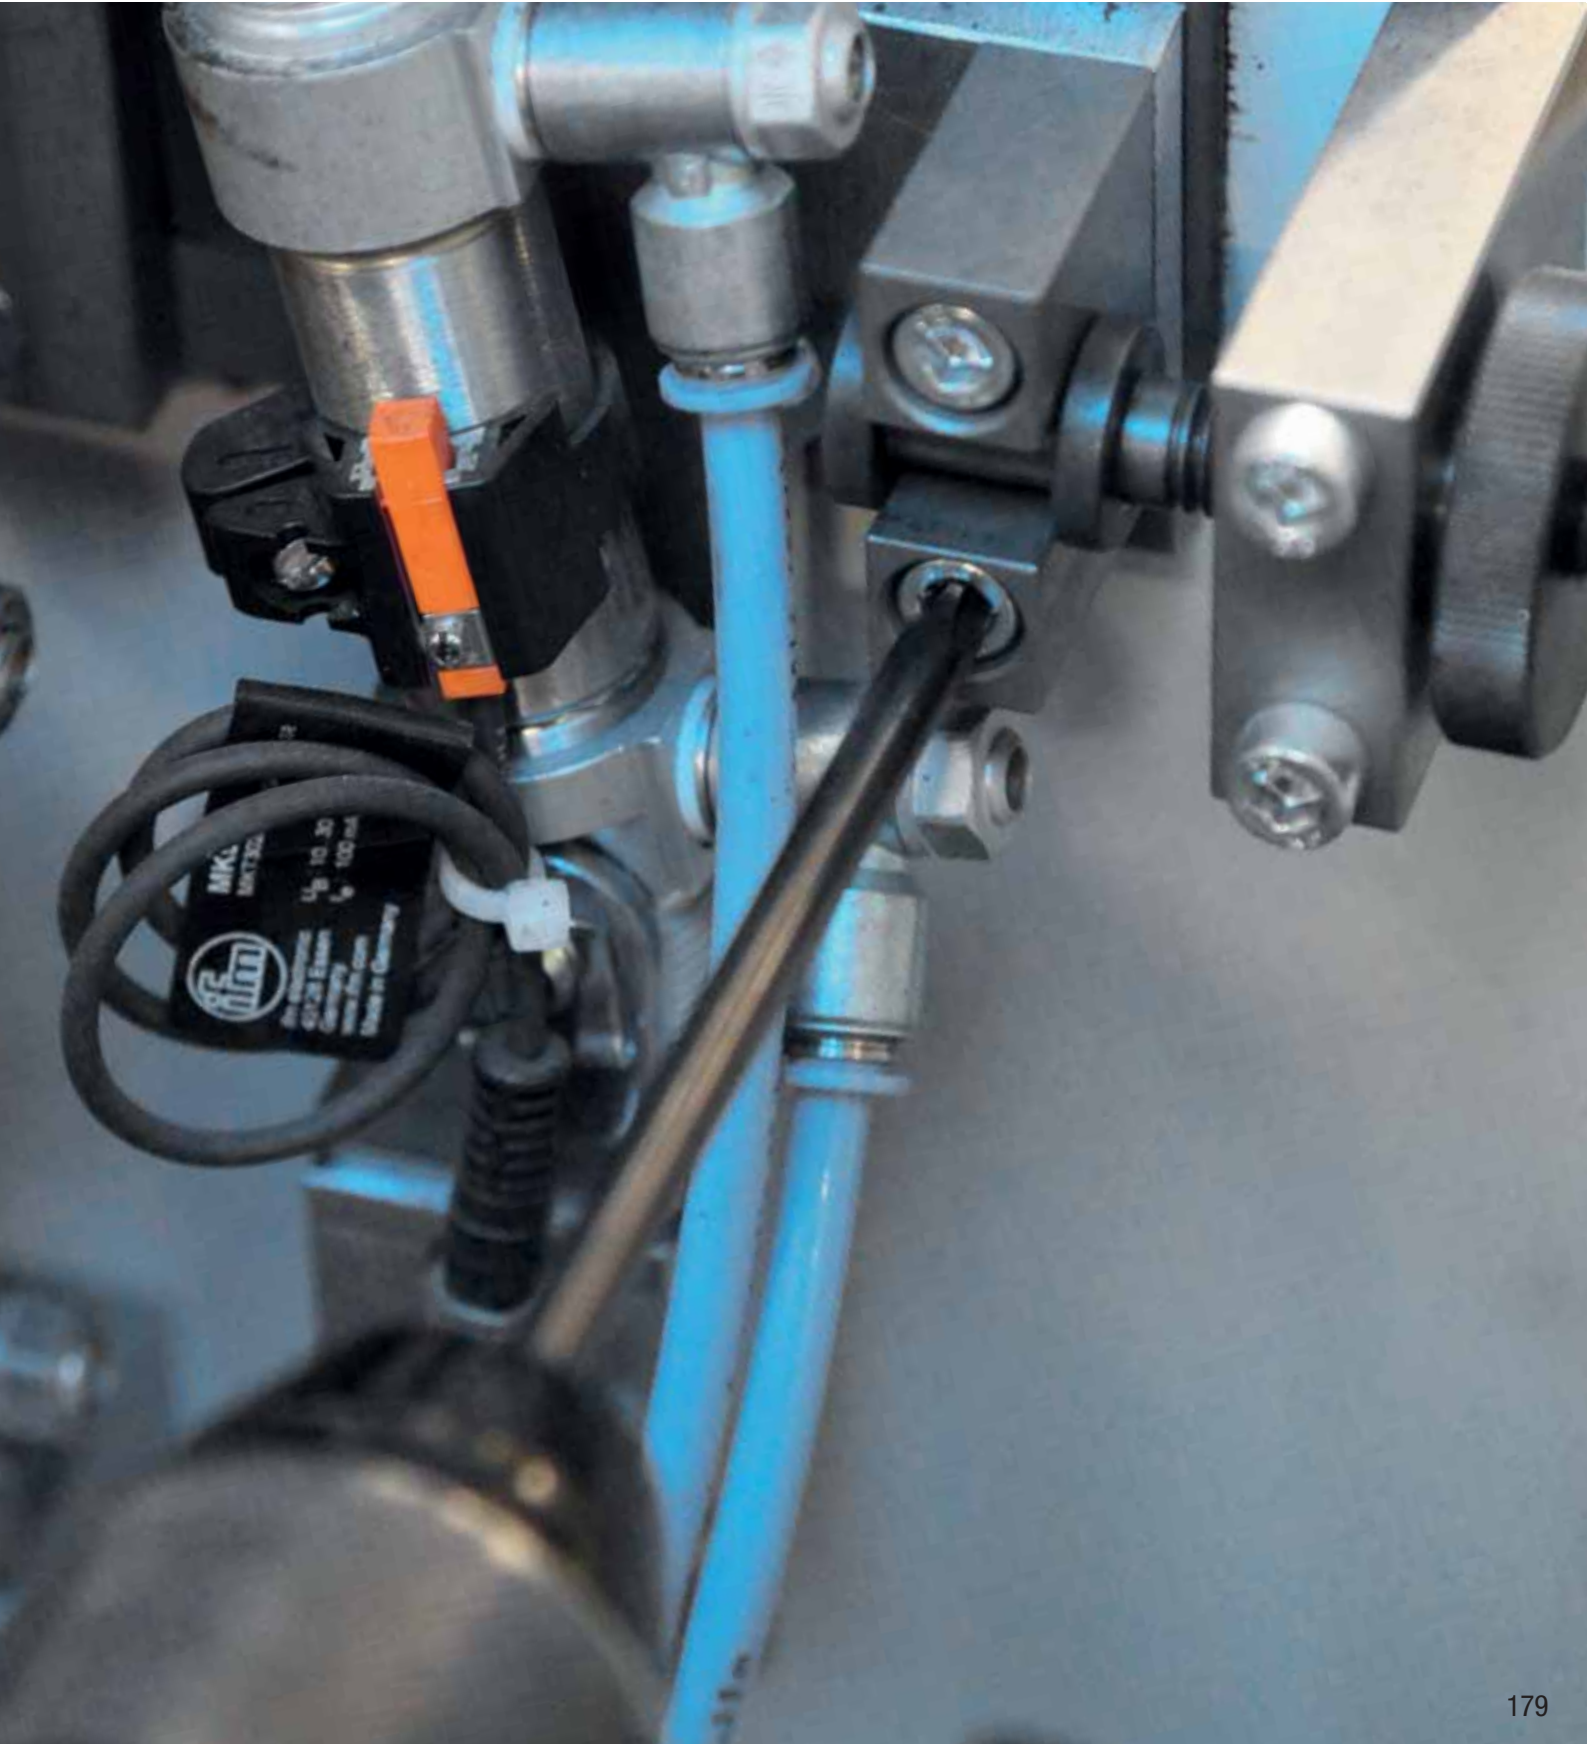

# BITS HOLDER RANGE

## Big & Big Mini Page 182

### Features

- Attachment DIN 3126 E 6,3.
- For hexa bits 1/4" according to DIN 3126 C 6,3 et E 6,3.
- Double permanent magnets at the bottom and exit of the bit holder.
- Adjustable system.
- Cold forging process.

### Benefits

- Depth adjustable - stop screw function.
- Big compatible with PH2, PH3, PZ2, PZ3, Torx 15 - 30.
- Big Mini compatible with PH1, PZ1 and Torx 10.
- Effective holding of screws with magnets.
- Ideal for long screws.
- Ideal for horizontal and vertical work alike.



DIN 3126 E6,3



DIN 3126 E6,3

## Fox II Page 182

### Features

- Attachment DIN 3126 E 6,3. and compatible SDS+.
- For bits hexa 1/4" according to DIN 3126 C 6,3 and E 6,3.
- Permanent magnet.
- Cold forging process.

### Benefits

- Quick ejection.
- Very high torsion resistance.
- Quick and easy manipulation with just one hand.
- Magnetic for handling the screws.



DIN 3126 E6,3







## Standard

P. 182-183

### Features

- Attachment DIN 3126 E 6,3. and compatible SDS+.
- For hexa bits 1/4" according to DIN 3126 C 6,3 and E 6,3.
- Permanent magnet.
- Bit holding ring (except U628).
- Cold forging process.

### Benefits

- Magnetic for handling the screws.
- Ideal for hard-to-reach areas, particularly with longer lengths (up to 250mm).



DIN 3126 E6,3



DIN 3126 E6,3



DIN 3126 E6,3



Ref.  
U634

Bits holder BIG for bits PH2-3 PZ2-3 Torx® n° 15 to 30

Adjustable bits holder with magnetic ring.



Plastic box

| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 60 | U634 | 3336600178212 | 1   |

Ref.  
U639

Bits holder BIG MINI for bits PH1 - PZ1 Torx® 10

Adjustable bits holder with magnetic ring.



Plastic box

| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 60 | U639 | 3336600181229 | 1   |

Ref.  
U648

Bits holder quick-lock Fox II

Quick lock system.



Plastic box

| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 60 | U648 | 3336600173156 | 1   |

Ref.  
U638

Bits holder quick-lock compatible SDS+

Quick lock system.



Plastic box

| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 80 | U638 | 3336600181212 | 1   |

Ref.  
U626

Standard quick-lock bits holder

Bit holder easy to use with one hand, high torsion resistance and quick-ejection mechanism.



Plastic box

| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 51 | U626 | 3336600189119 | 1   |

Ref.  
**627**

## Stopvis

Stopvis will prevent the screw from passing through the material.



| TL              | Ref.   | Gencod        | Qty |
|-----------------|--------|---------------|-----|
| <b>2 pieces</b> |        |               |     |
| 25              | 627PH2 | 3336600146778 | 1   |
| 25              | 627PZ2 | 3336600146785 | 1   |

Plastic box

Ref.  
**U628**

## Standard bits holder

Magnetic bit holder allowing to easily manipulate the screws.



| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 58 | U628 | 3336600146792 | 1   |

Plastic box

Ref.  
**U629**

## Standard bits holder big length

Ideal for difficult acces point up to 250 mm.



OR



| TL  | Ref.     | Gencod        | Qty |
|-----|----------|---------------|-----|
| 74  | U629L074 | 3336600181243 | 1   |
| 100 | U629L100 | 3336600181250 | 1   |
| 150 | U629L150 | 3336600181267 | 1   |
| 200 | U629L200 | 3336600181274 | 1   |
| 250 | U629L250 | 3336600181281 | 1   |

Plastic box

Plastic box

Ref.  
**U635**

## Standard bits holder compatible SDS+

Magnetic bit holder compatible SDS+ allowing to easily manipulate the screws.



| TL | Ref. | Gencod        | Qty |
|----|------|---------------|-----|
| 78 | U635 | 3336600178229 | 1   |

Plastic box





Ref.  
637

# 90° angle driver

**Features**

- Suitable for bits or drills 1/4" according to DIN 3126 C6.3 and E6.3.
- Size : 138x50x28.

**Benefits**

- Very useful to drill in small space.
- High quality and intensive use.

- Can be use with cordless machine.

**Advices**

- RPM max 2000.



DIN 3126  
E6.3



Twistpack

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 637  | 3336600187580 | 1   |

Ref.  
644

# Flexible shaft bit holder angle

**Features**

- Attachment E6.3 DIN 3126.
- For bits 1/4" according to DIN 3126 C6.3 and E6.3.
- Total length 270mm.
- Magnetic bit holder.

**Benefits**

- Flexible shaft allows bending in any direction.



Black plastic clip

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 644  | 3336600187511 | 1   |



Ref.  
645

# Magnetic and telescopic bitholder handle

## Features

- Attachment E6.3 DIN 3126.
- For bits 1/4" according to DIN 3126 C6.3 and E6.3.

## Benefits

- Ergonomic handle.



Black plastic clip

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 645  | 3336600190047 | 1   |

Ref.  
646

# Quick lock bit holder angle

## Features

- Attachment E6.3 DIN 3126.
- For bits 1/4" according to DIN 3126 C6.3 and E6.3.

## Benefits

- Adjustable length from 192 to 267 mm with clockwise and anti clockwise rotation.



Blister

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 646  | 3336600189096 | 1   |



Ref.  
U601S

# Power socket

## Surface protection socket

### Features

- Attachment E6.3 DIN 3126.
- For hex head screw.

### Benefits

- Specially adapted for screws used for fastening

front or sandwich panels and self-drilling screws.



Plastic box

| Ø             | TL | Ref.      | Gencod        | Qty |
|---------------|----|-----------|---------------|-----|
| <b>L50</b>    |    |           |               |     |
| S07           | 50 | U601S07   | 3336600181632 | 1   |
| S08           | 50 | U601S08   | 3336600181649 | 1   |
| S10           | 50 | U601S10   | 3336600181656 | 1   |
| S1/4 (6,35mm) | 50 | U601S1/4  | 3336600181663 | 1   |
| S5/16 (8mm)   | 50 | U601S5/16 | 3336600181670 | 1   |
| S3/8 (9,5mm)  | 50 | U601S3/8  | 3336600181687 | 1   |

Ref.  
U600

# Pro magnetic socket

## Magnetic socket length 50 mm for hexagonal metric screws.

### Features

- Attachment E6.3 DIN 3126.
- For hex head screw.

### Benefits

- Powerful magnet for holding screws.



Plastic box

| Ø             | TL | Ref.      | Gencod        | Qty |
|---------------|----|-----------|---------------|-----|
| <b>L50</b>    |    |           |               |     |
| S05.5         | 50 | U600S05.5 | 3336600187276 | 1   |
| S06           | 50 | U600S06   | 3336600173118 | 1   |
| S07           | 50 | U600S07   | 3336600172319 | 1   |
| S08           | 50 | U600S08   | 3336600172326 | 1   |
| S09           | 50 | U600S09   | 3336600190276 | 1   |
| S10           | 50 | U600S10   | 3336600172340 | 1   |
| S12           | 50 | U600S12   | 3336600172357 | 1   |
| S13           | 50 | U600S13   | 3336600172364 | 1   |
| S1/4 (6,35mm) | 50 | U600S1/4  | 3336600172302 | 1   |
| S5/16 (8mm)   | 50 | U600S5/16 | 3336600192393 | 1   |
| S3/8 (9,5mm)  | 50 | U600S3/8  | 3336600192386 | 1   |

Ref.  
U603

# Pro magnetic socket

## Magnetic socket length 65 mm for hexagonal metric screws.



Plastic box

| Ø          | TL | Ref.      | Gencod        | Qty |
|------------|----|-----------|---------------|-----|
| <b>L65</b> |    |           |               |     |
| S05        | 65 | U603S05   | 3336600187368 | 1   |
| S05.5      | 65 | U603S05.5 | 3336600187375 | 1   |
| S06        | 65 | U603S06   | 3336600187382 | 1   |
| S07        | 65 | U603S07   | 3336600187399 | 1   |
| S08        | 65 | U603S08   | 3336600187283 | 1   |
| S10        | 65 | U603S10   | 3336600187290 | 1   |
| S12        | 65 | U603S12   | 3336600190283 | 1   |
| S13        | 65 | U603S13   | 3336600187313 | 1   |

### Features

- Attachment E6.3 DIN 3126.
- For hex head screw.

# SCREWDRIVING



631C



641C



U618C



6000A



6000B

| Features       | Pcs | Composition  | Ref.  | Gencod        |
|----------------|-----|--|-------|---------------|
| BLUE SHOCK BIT | 10  | PZ2(x2)-PZ3 / TX15-20(x2)-25(x2)-30 + 1 special impact screwdriver bit holder  | 631C  | 3336600194113 |
| BLUE SHOCK BIT | 10  | PZ2(x2)-PZ3 / PH2(x2) PH3 / TX20-26  | 641C  | 3336600196544 |
| BLUE SHOCK BIT | 10  | PZ2-3 / T20-25-30-40 + 1 standard bit holder 58mm  | U618C | 3336600190290 |
| TORSION BIT    | 10  | PH 1-2(x2)-3(x2)/PZ 1-2(x2)-3(x2)/TX 10-15-20(x2)-25(x2)-30-40/PL 0.6X4.5-0.8X5.5-1.2X6.5/HEX4-5 - 10 sockets : 5-6-7-8-9-10-11-12-13-14 + Extension 50 and 100 mm + 1 universal adapter + 1 adapter 1/4" + 1 screwdriver ratchet + 1 hand screwdriver       | 6000A | 3336600199866 |
| TORSION BIT    | 10  | PZ 1(x2)-2(x3)-3(x2)/PL 0.6X4.5-0.8X5.5-1.2X6.5/PH 1(x2)-2(x3)-3(x2)/HEX3-4-5/TX 10-15(x2)-20(x2)-25(x2)-27-30-40/HEX3-4-5-6-8 - 10 sockets : 5-6-7-8-9-10-11-12-13-14 + 1 STD bit holder 51mm + 1 adapter 1/4" + 1 screwdriver ratchet + 1 hand screwdriver | 6000B | 3336600199873 |







635C



632C



633C



636C



634C

| Features    | Pcs | Composition   | Ref. | Gencod        |
|-------------|-----|---|------|---------------|
| TORSION BIT | 10  | L25mm : PZ 1-2(x3)-3-(x2) / PH 1-2(x3)-3(x2) / PL 4,5-5,5/<br>HEX 2-3-4-5 TX 10-15-20(x2)-25(x2)-30(x2)-40 / SQ 1-2-3<br>- 50mm : PZ1-2/PH2-3/TX20-25-30 + 1 Bit holder | 632C | 3336600194120 |
| TORSION BIT | 10  | L25mm : PZ1(x2)-2(x3)-3(x2)/PH1(x2)-2(x3)-3(x2)/PL4,5-<br>5,5/TX10-15-20(x3)-25(x2)-30(x2)-40/HEX2-3-4-5-6 + 1<br>bit holder standard                                   | 634C | 3336600197367 |
| TORSION BIT | 10  | L25mm : PZ1(x2)-2(x3)-3(x2)/PH1(x2)-2(x3)-3(x2)/PL4,5-<br>5,5/TX10-15-20(x3)-25(x2)-30(x2)-40/HEX2-3-4-5-6 + 1<br>bit holder FOX II                                     | 635C | 3336600194106 |
| TORSION BIT | 10  | L25mm : PZ 1-2(x2)-3(x2)/PH1-2(x2)-3(x2)/TX15-20(x2)-<br>25(x2)-30-40/HEX 3-4 - Ratchet : 1/4" - sockets : 5,5/7 /<br>8 / 10 / 11 / 12 /13 + 1 socket holder(6,35mm)    | 633C | 3336600194137 |
| TORSION BIT | 10  | L50mm : PZ 1 / PZ 2 (x2) PH 2 (x2) / PH 3 / Tx 20 / Tx 26   | 636C | 3336600194847 |





# SCREWDRIVING



U601



U602



U649C




U642C



U642D



U641D



U640D

| Features                  | Pcs | Composition  | Ref.  | Gencod        |
|---------------------------|-----|--|-------|---------------|
| SURFACE PROTECTION SOCKET | 10  | SW 7-8(x2)-3/8-10(x2)-5/17   | U601  | 3336600189102 |
| PRO MAGNETIC SOCKET       | 10  | HEX 1/4-7-8-3/8-10-12-13 - L 50 mm   | U602  | 3336600187115 |
| TORSION BIT               | 10  | TX10-15-20-25-30-40 + Bit holder   | U642C | 3336600179547 |
| TORSION BIT               | 10  | PZ1-2 (2)-3/PH1-2 (2)-3/ TX15-20-25 + Bit holder                                       | U642D | 3336600180642 |
| TORSION BIT               | 10  | PZ 1-2(2)-3 PH 1-2(2)-3 TX 15-20-25-30 PL5,5-6,5 + 1 r<br>Quick Lock bit holder FOX II | U649C | 3336600183001 |
| TORSION BIT               | 10  | PZ1-2-3/PH1-2-3 + bit holder   | U641D | 3336600179530 |
| TORSION BIT               | 10  | PZ1-2 (2)-3/PH1-2 (2)-3/ PL4,5-5,5-6,5 + bit holder                                    | U640D | 3336600179523 |







U204E



U205E



U206E



U644C



U643D



| Features    | Pcs | Composition  | Ref.  | Gencod        |
|-------------|-----|--|-------|---------------|
| BIT HOLDER  | 10  | U628 X4 - U648 X12 - U634 X8   | U204E | 3336600179608 |
| BIT HOLDER  | 10  | U628 X8 - U634 X8 - U648 X8  | U205E | 3336600182257 |
| BIT HOLDER  | 10  | U628 X4 - U629L074 X4 - U629L100 X4 - U648 X4 - U634 X4 - U637 X5  | U206E | 3336600185876 |
| TORSION BIT | 10  | PH 1-1-2-2-3-3/PZ 1-1-2-2-3-3/PL 0.5X3 - 0.6X4.5 - 0.8X5.5 - 1X5.5 - 1.2X6.5 - 1.6X8/HX 2.5-3-4-5-6-7- TX 10-15-20-25-30-40 - 10 Sockets : 5-6-7-8-9-10-11-12-13-14 + 1 screwdriver ratchet + bit holder Fox II + 1 hand screwdriver + 1/4» female square adaptor on 1/4» hexagon - 1/4» square adaptor on hexagon   | U644C | 3336600182073 |
| TORSION BIT | 10  | 1 magnetic holder FoX II + 1 hand screwdriver with 8 embouts (Ph1, Ph2, Pz1, Pz2, TorxT15, T20, T25, T30) 70 «Industry» bit each Torsion : SL 0.5x3.0-0.6x4.5-0.8x5.5(x2)-1.2x6.5-1.6x8.0/PH 0-1-2(x4)-3(x2)/ HEX 2.0-2.5-3.0-4.0-5.0-6.0-7.0-8.0/PZ 1-2(x4)-3(x2)/TW 1-2-3-4-5/TQS 5-6-8-10/SQ 0-1-2-3/Tx Ta 10-15-20-25-30-40/HEXTa 3.0-4.0-5.0-6.0/Spanner 4-6-8-10/Tx 05-06-07-08-09/Tx 10-15-20(x2)-25(x2)-27-30-40 | U643D | 3336600182066 |



# SCREW BITS MERCHANDISING

## MODULAR CONCEPT

A minimum of space for a maximum  
of references



## BULK DISPLAY

Bulk bits storage system.  
Ref. M00120

## DISTRIBUTION BOXES

Boxes delivered by PCB of 5pcs



| Features  | Ref.        | Gencod        |
|---|-------------|---------------|
| 1M SALES SHELF (to attribute with the pediment of your choice)                      | GOND1000    | 333660900019  |
| 0,5M SALES SHELF (to attribute with the pediment of your choice)                    | GOND500     | 333660900071  |
| DIAGER LUMINAR PEDIMENT FOR 1M SALES SHELF  | M00202      | 3336609009500 |
| DIAGER LUMINAR PEDIMENT FOR GOND500   | M00203      | 3336609009975 |
| ELECTRIC CABLE FOR LUMINAR PEDIMENT<br>(to attribute with each command of pediment) | CORDON      | 3336600187528 |
| DIAGER PEDIMENT FOR GOND1000/1  | FR1000      | 3336609005472 |
| DIAGER PEDIMENT FOR GOND500   | FR500       | 3336609005373 |
| ADJUSTABLE RACK WITHOUT HOOKS 1M  | M00150      | 3336609004468 |
| ADJUSTABLE RACK WITHOUT HOOKS 0,5M  | M00158      | 3336609005793 |
| DOUBLE HOOK   | M00151      | 3336609004475 |
| SIMPLE HOOK   | M00152      | 3336609004482 |
| ANTI-THEFT 1M   | ANTIVOL1000 | 3336609002037 |
| ANTI-THEFT 0,5M   | ANTIVOL500  | 3336609004291 |
| ANTI-THEFT FOR HOOKS  | M00169      | 3336609006745 |
| SHELF 900MM ADJUSTABLE WIDTH DEPTH 360MM  | M00167      | 3336609006141 |
| SHELF 500MM ADJUSTABLE WIDTH, DEPTH 400MM   | TAB500400   | 3336609000170 |
| DISPLAY CASE (to attribute with 1 BAR1000)  | M00157      | 3336609005274 |
| 1M STAY FOR 1M SALES SHELF  | BAR1000     | 3336609000057 |
| 0,5M STAY FOR 0,5M SALES SHELF  | BAR500      | 3336609000095 |
| MONOBLOC DISPLAY  | M00171      | 3336609006844 |
| PR24 DISPLAY - STRUCTURE ONLY (delivered flat)                                      | M00135      | 3336609007643 |
| 6 HOOKS RACK (with label holder)  | M00101      | 3336609008640 |
| BULK DISPLAY FOR SCREW BITS   | M00120      | 3336609001306 |
| POS COUNTER (DELIVERED WITH 2 SHELVES)  | C00085      | 3336609005397 |
| HOOK FOR REF.C00085   | C00087      | 3336609005670 |
| IOP SHELF TALKER BLUESHOCK  | B00448      | 3336609006155 |
| TWIN STICK  | M00075      | 3336600196964 |





## DI SPLAY BIT HOLDERS

POS counter for bit holders  
Range recommended or adapted according  
to your needs



## 1 METER DI SPLAY


### Screw bits display

Rack Presentation  
Color-segmented screwing range for each  
family (Torsion, Impact, Diatin, Quality, Bit  
Holders and Sockets).  
Declinations on 1M Sales shelf



## PROMOTION

Modular counter concept

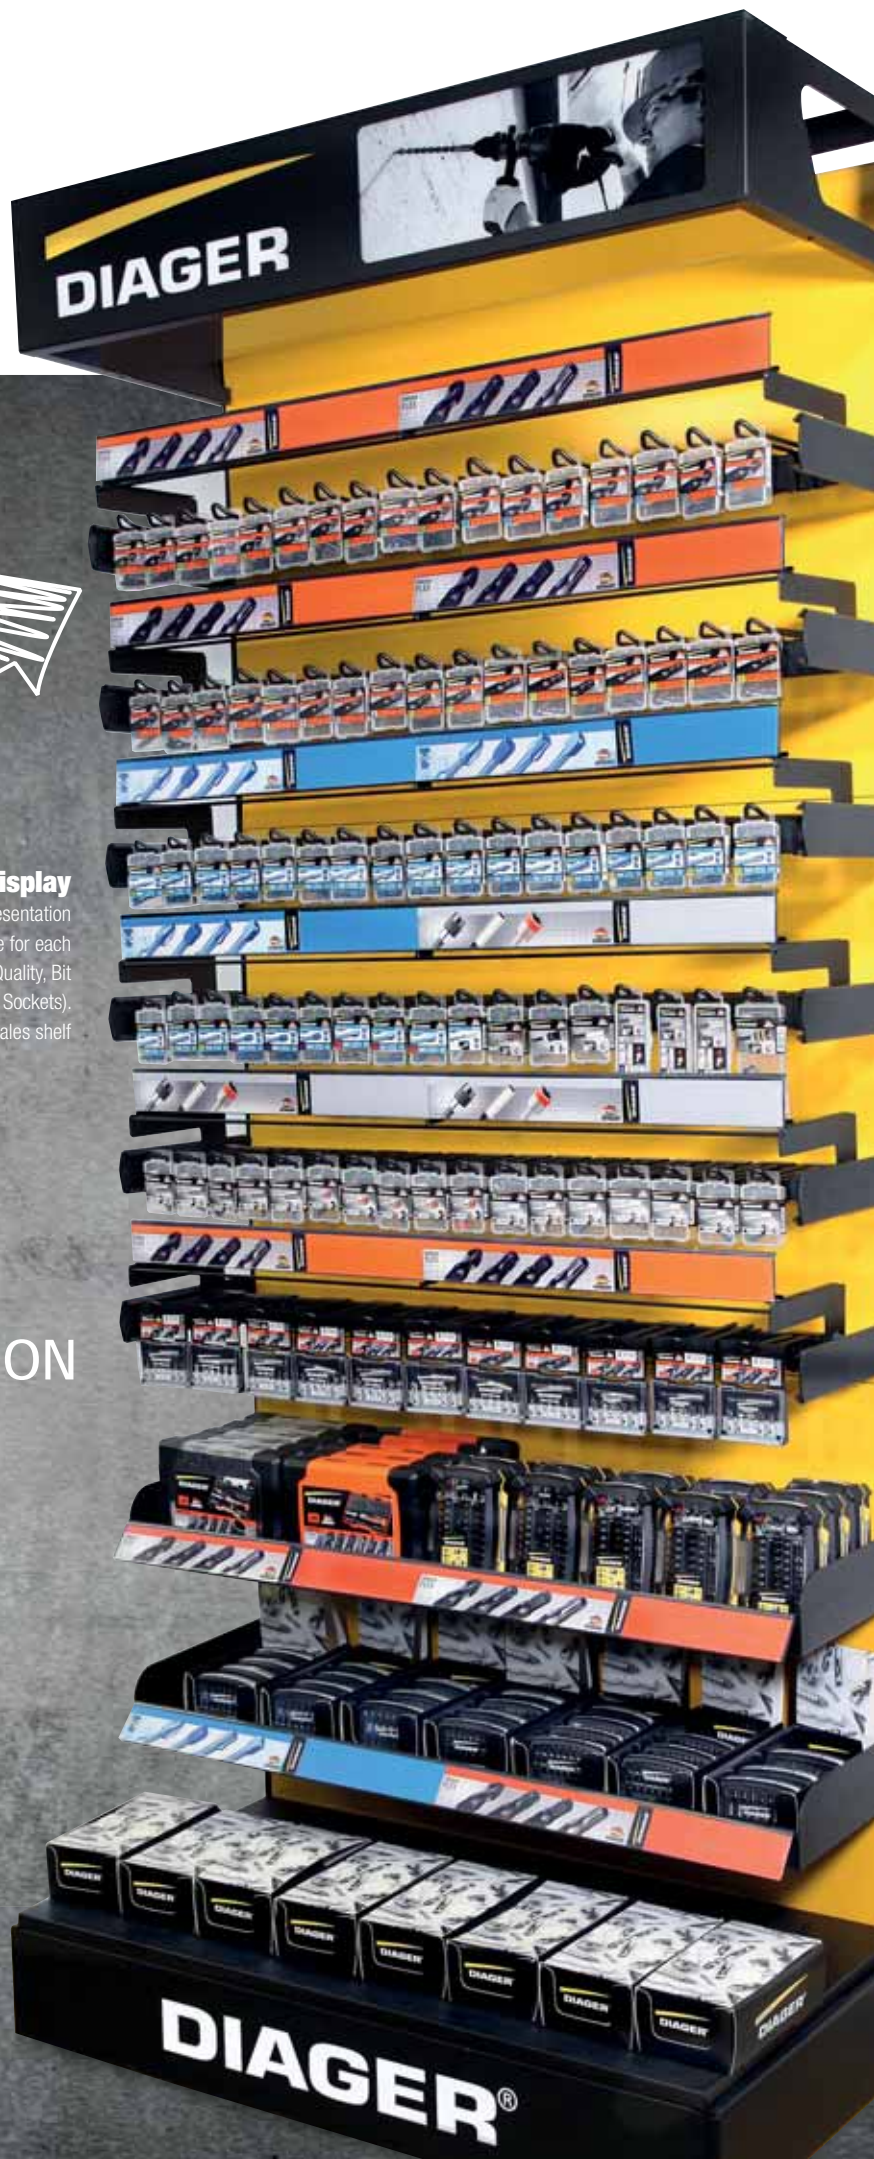



# HOLE SAWS RANGE



## Standard system

HEX-shank or compatible SDS-plus

651HEX01 or 651SDS01

ADAPTER

Ø14-30

651L



**DRILLING**  
**Ø 14-30**



651HEX03 or 651SDS02

ADAPTER

Ø 32-210

651L



**DRILLING**  
**Ø 32-210**



## Features

- HSS 8% cobalt.
- Teeth milled and side set.
- Progressive teeth.
- 4-6 tpi/mm.

## Applications

Accurate holes for electrical sockets, cables, tubes...  
Drilling in wood, soft concrete, plastic, metals  
at least 1 mm thick.



**Made in  
GERMANY**



### TEETH MILLED

Milled teeth (compared to cut teeth) show more strength in metal and have a longer life.



### TEETH SIDE SET

Setting directs one tooth to the left and another to the right. That is crucial to give the saw high cutting power, and it also makes the removal of cut particles easier, keeping the saw from blocking while sawing.



### PROGRESSIVE TEETH

Set of seven teeth with well-defined shapes, reproduced over the whole perimeter of the saw. Variable-pitch teeth for cutting versatility with definite materials (metal, wood, plastics etc.), reducing vibrations and allowing a better finish.




### TEETH 8% COBALT

The addition of cobalt improves resistance to heat. That alloy element makes it possible to withstand greater cutting forces and drill hard materials such as stainless steel. The life is longer than that of a standard HSS saw.



## Quick Lock system

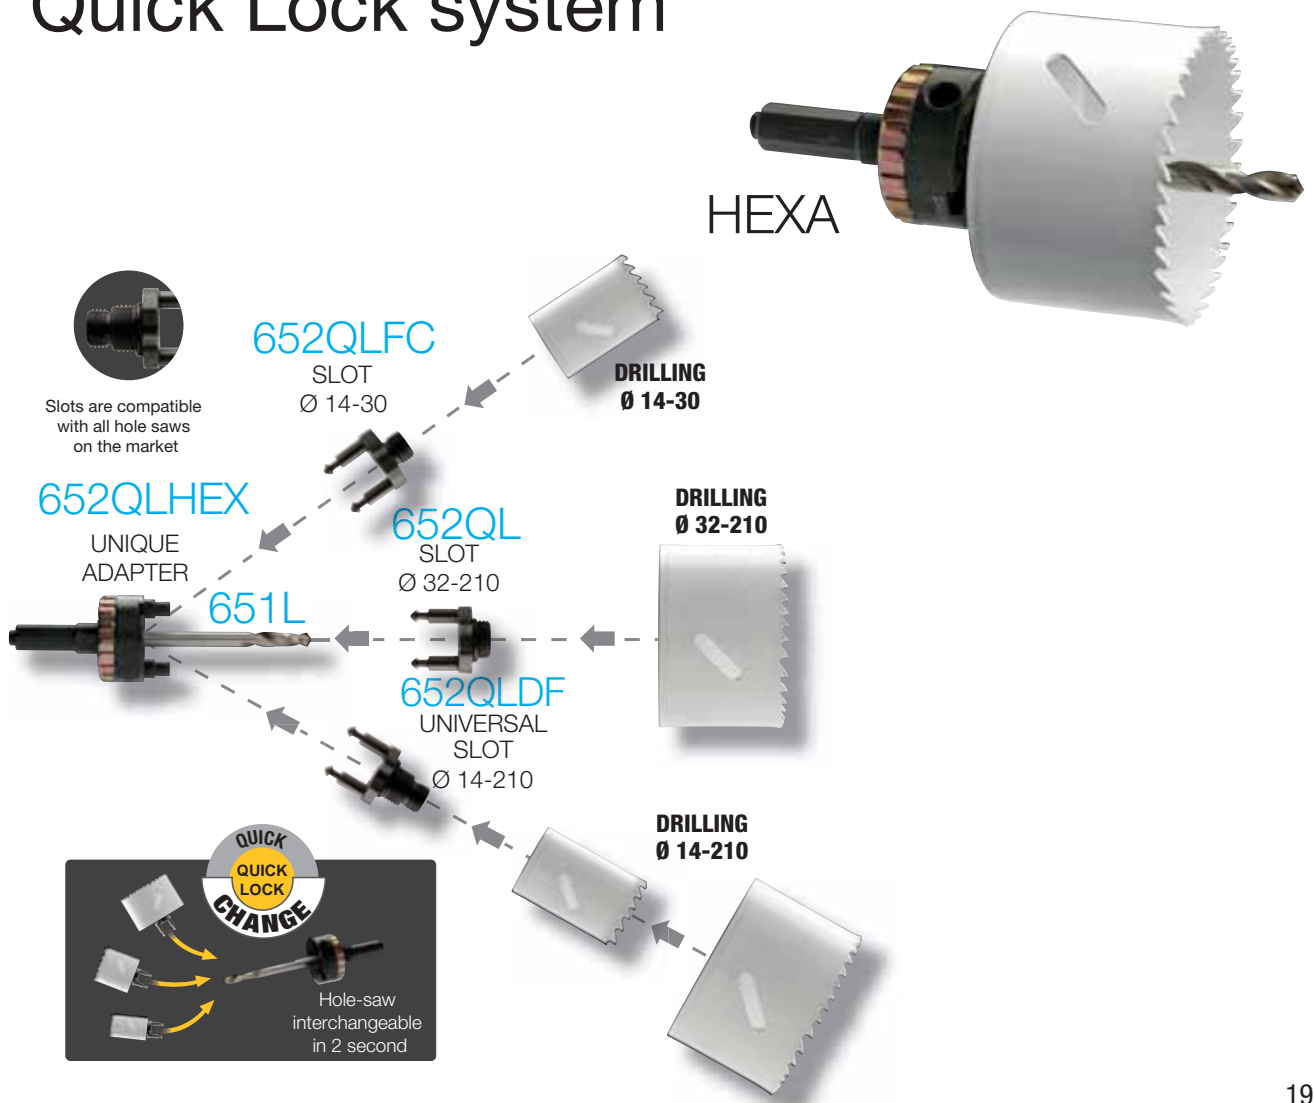



Ref.  
650

# Hole saw

## Bi-metal HSS 8% coblat

Bimetal Hole Saw 8% cobalt provides better resistance in drilling hard steels such as stainless steel. Variable toothing enable clean and fast cut.



- HSS 8% COBALT
- VERSALITY

### Description

- Teeth HSS 8% cobalt.
- Teeth milled and site set.
- Variable toothing 4-6 tpi.

### Avantages

- High resistance.
- Longlife.
- Clean and fast cut.

### Applications

- Precise holes for electrical sockets, cables, tubes.



Stainless steel, Composite, Alloy steel, Low density wood

HSS-E  
8 % Co



| Ø  | WL | TL   | Ref.   | Gencod        | Qty | Ø   | WL | TL   | Ref.    | Gencod        | Qty |
|----|----|------|--------|---------------|-----|-----|----|------|---------|---------------|-----|
| 14 | 36 | 54   | 650D14 | 3336600159266 | 1   | 64  | 38 | 43.5 | 650D64  | 3336600159570 | 1   |
| 16 | 36 | 54   | 650D16 | 3336600159273 | 1   | 65  | 38 | 43.5 | 650D65  | 3336600159587 | 1   |
| 17 | 36 | 54   | 650D17 | 3336600159280 | 1   | 67  | 38 | 43.5 | 650D67  | 3336600159594 | 1   |
| 19 | 36 | 51   | 650D19 | 3336600159297 | 1   | 68  | 38 | 43.5 | 650D68  | 3336600159600 | 1   |
| 20 | 36 | 51   | 650D20 | 3336600159303 | 1   | 70  | 38 | 43.5 | 650D70  | 3336600159617 | 1   |
| 21 | 36 | 51   | 650D21 | 3336600159310 | 1   | 73  | 38 | 43.5 | 650D73  | 3336600159624 | 1   |
| 22 | 36 | 51   | 650D22 | 3336600159327 | 1   | 76  | 38 | 43.5 | 650D76  | 3336600159631 | 1   |
| 23 | 36 | 51   | 650D23 | 3336600159334 | 1   | 79  | 38 | 43.5 | 650D79  | 3336600159648 | 1   |
| 24 | 36 | 51   | 650D24 | 3336600159341 | 1   | 83  | 38 | 43.5 | 650D83  | 3336600159655 | 1   |
| 25 | 36 | 51   | 650D25 | 3336600159358 | 1   | 86  | 38 | 43.5 | 650D86  | 3336600159662 | 1   |
| 27 | 36 | 51   | 650D27 | 3336600159365 | 1   | 89  | 38 | 43.5 | 650D89  | 3336600159679 | 1   |
| 29 | 36 | 51   | 650D29 | 3336600159372 | 1   | 92  | 38 | 43.5 | 650D92  | 3336600159686 | 1   |
| 30 | 36 | 51   | 650D30 | 3336600159389 | 1   | 95  | 38 | 43.5 | 650D95  | 3336600159693 | 1   |
| 32 | 36 | 49   | 650D32 | 3336600159396 | 1   | 98  | 38 | 43.5 | 650D98  | 3336600159709 | 1   |
| 33 | 36 | 49   | 650D33 | 3336600159402 | 1   | 102 | 38 | 43.5 | 650D102 | 3336600159716 | 1   |
| 35 | 36 | 49   | 650D35 | 3336600159419 | 1   | 105 | 38 | 43.5 | 650D105 | 3336600159723 | 1   |
| 37 | 38 | 43.5 | 650D37 | 3336600159426 | 1   | 108 | 38 | 43.5 | 650D108 | 3336600159730 | 1   |
| 38 | 38 | 43.5 | 650D38 | 3336600159433 | 1   | 111 | 38 | 43.5 | 650D111 | 3336600159747 | 1   |
| 40 | 38 | 43.5 | 650D40 | 3336600159440 | 1   | 114 | 38 | 43.5 | 650D114 | 3336600159754 | 1   |
| 41 | 38 | 43.5 | 650D41 | 3336600159457 | 1   | 121 | 38 | 43.5 | 650D121 | 3336600159761 | 1   |
| 43 | 38 | 43.5 | 650D43 | 3336600159464 | 1   | 127 | 38 | 43.5 | 650D127 | 3336600159778 | 1   |
| 44 | 38 | 43.5 | 650D44 | 3336600159471 | 1   | 133 | 38 | 43.5 | 650D133 | 3336600159785 | 1   |
| 46 | 38 | 43.5 | 650D46 | 3336600159488 | 1   | 140 | 38 | 43.5 | 650D140 | 3336600159792 | 1   |
| 48 | 38 | 43.5 | 650D48 | 3336600159495 | 1   | 146 | 38 | 43.5 | 650D146 | 3336600159808 | 1   |
| 51 | 38 | 43.5 | 650D51 | 3336600159501 | 1   | 152 | 38 | 43.5 | 650D152 | 3336600159815 | 1   |
| 52 | 38 | 43.5 | 650D52 | 3336600159518 | 1   | 160 | 38 | 43.5 | 650D160 | 3336600159822 | 1   |
| 54 | 38 | 43.5 | 650D54 | 3336600159525 | 1   | 168 | 38 | 43.5 | 650D168 | 3336600159839 | 1   |
| 57 | 38 | 43.5 | 650D57 | 3336600159532 | 1   | 177 | 38 | 43.5 | 650D177 | 3336600159846 | 1   |
| 58 | 38 | 43.5 | 650D58 | 3336600159549 | 1   | 200 | 38 | 43.5 | 650D200 | 3336600159853 | 1   |
| 59 | 38 | 43.5 | 650D59 | 3336600159556 | 1   | 210 | 38 | 43.5 | 650D210 | 3336600159860 | 1   |
| 60 | 38 | 43.5 | 650D60 | 3336600159563 | 1   |     |    |      |         |               |     |



see our  
video on  
YouTube

Ref.  
651HEX01

Arbor for hole saw 14-30mm hexagonal shank  
9,5mm with HSS pilot drill bit



| TL  | Ref.     | Gencod        | Qty |
|-----|----------|---------------|-----|
| 100 | 651HEX01 | 3336600159877 | 1   |

Ref.  
651HEX03

Arbor for hole saw 32-210mm hexagonal shank  
9,5mm with HSS pilot drill bit



| TL  | Ref.     | Gencod        | Qty |
|-----|----------|---------------|-----|
| 127 | 651HEX03 | 3336600159891 | 1   |

Ref.  
651SDS01

Compatible SDS+ arbor for hole saw 14-30mm



| TL  | Ref.     | Gencod        | Qty |
|-----|----------|---------------|-----|
| 120 | 651SDS01 | 3336600159914 | 1   |

Ref.  
651SDS02

Compatible SDS+ arbor for hole saw 32-210mm



| TL  | Ref.     | Gencod        | Qty |
|-----|----------|---------------|-----|
| 131 | 651SDS02 | 3336600159921 | 1   |

Ref.  
651L

2 HSS pilot drill bit 83mm for hexagonal hole saw arbor



DIY tube



| Pilot compatibility                       | TL  | Ref.    | Gencod        | Qty |
|---|-----|---------|---------------|-----|
| 651HEX01 - 651HEX03 - 651SDS01 - 651SDS02 | 83  | 651L083 | 3336600159938 | 1   |
| Quick lock 652QLHEX                       | 100 | 651L100 | 3336600160019 | 1   |
| 651HEX01 - 651HEX03 - 651SDS01 - 651SDS02 | 102 | 651L102 | 3336600159945 | 1   |

Ref.  
651RA

Hole saw extension 300mm hexagonal shank 9,5mm



DIY tube



| TL  | Ref.         | Gencod        | Qty |
|-----|--------------|---------------|-----|
| 300 | 651RAHEXL300 | 3336600192584 | 1   |

Ref.  
652QLHEX

Quick lock arbor hex shank



Twistpack



| TL  | Ref.     | Gencod        | Qty |
|-----|----------|---------------|-----|
| 127 | 652QLHEX | 3336600159952 | 1   |

Ref.  
652QLFC

5 Adapter quick lock 14-30 for quick lock hole saw arbor



Twistpack



| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 652QLFC | 3336600159976 | 1   |



Ref.  
**652QL**

5 Adapter quick lock 32-210 for quick lock  
hole saw arbor



Twistpack

| Ref.  | Gencod        | Qty |
|-------|---------------|-----|
| 652QL | 3336600159990 | 1   |



Ref.  
**652QLDF**

5 Adapter double thread for quick lock hole  
saw arbor



Twistpack

| Ref.    | Gencod        | Qty |
|---------|---------------|-----|
| 652QLDF | 3336600160002 | 1   |



# SAWING



Kit  
650BD68



Plumber  
653C



Electrician I  
654C



Electrician II  
657C



# HOLE SAW SETS



General  
655C



General  
Quick-Lock  
656C



General Quick-Lock  
651E



Hole saw  
651C

| Features                       | Pcs | Composition  | Ref.    | Gencod        |
|--------------------------------|-----|--|---------|---------------|
| KIT                            | 1   | Holesaw Ø 68mm   | 650BD68 | 3336600195400 |
| PLUMBER HOLESAW SET            | 9   | Ø19-25-32-38-44-57-68 mm + 2 pilots hexa 9.5 mm with centering drill bit (Ø14-30 / Ø32-210 mm)           | 653C    | 3336600160316 |
| ELECTRICIAN HOLESAW SET I      | 8   | Ø22-35-51-57-68-76 mm + 2 pilots hexa 9.5 mm with centering drill bit (Ø14-30 / Ø32-210 mm)              | 654C    | 3336600160323 |
| ELECTRICIAN HOLESAW SET II     | 8   | Ø22-40-54-65-68-73 mm + 2 adapters hexa with centering drill bit   | 657C    | 3336600173866 |
| GENERAL HOLESAW SET            | 12  | Ø19-22-25-32-35-38-44-57-68-76 mm + 2 pilots hexa 9.5 mm with centering drill bit (Ø14-30 / Ø32-210 mm)  | 655C    | 3336600160330 |
| GENERAL QUICK-LOCK HOLESAW SET | 20  | Ø19-22-25-32-38-44-57-68-76 mm + 1 pilot quick-lock hexa 9.5 mm with centering drill bit + 10 connectors | 656C    | 3336600167001 |
| GENERAL QUICK-LOCK HOLESAW SET | 5   | Ø 83-102 mm<br>1 adapter quick-lock with centering drill bit + 2 connectors                              | 651E    | 3336600185968 |
| HOLESAW SET                    | 9   | Ø 22-29-35-44-51-68 mm + 1 pilot hexa 8,7 mm with centering drill bit                                    | 651C    | 3336600195189 |



# SAWING MADE IN GERMANY




# JIGSAW, RECIPROCATING SAW

## Product characteristics

### STAR teeth

Conically ground blade, teeth triply sharpened.

Benefits : Extreme fast, precise and clean cuts in all woods and plastics.

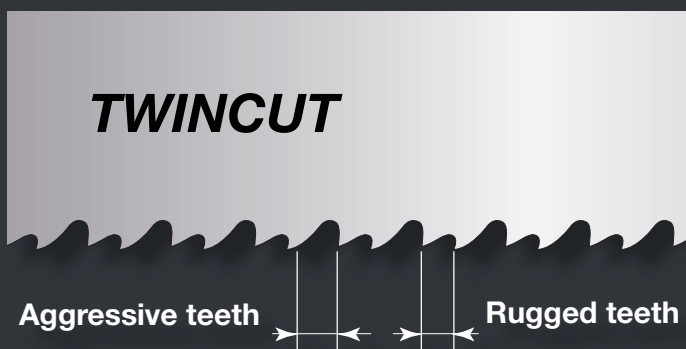

### TWINCUT teeth

Ideally applicable for metal sheets treatment, pipes and profiles with a thickness over 2mm and dismantling of wood with nails/screws. The perfect twins : robust and aggressive and twin-cut toothing. There is a continuous change between a **very aggressive tooth** with a deep chip space and a **very robust tooth** with a flat chip space thus allowing a maximum speed and stability.


XLS technology : TWIN-CUT reciprocating saw blades are manufactured from a new powder metallurgical high-performance steel. The physical features of this XLS material make essentially smoother structures at the cutting edges of the teeth in the micro range.

**With the XLS technology feature : tougher hardness treatment, better heat resistance, sharper longer.**






# CHOICE OF TEETH / APPLICATION

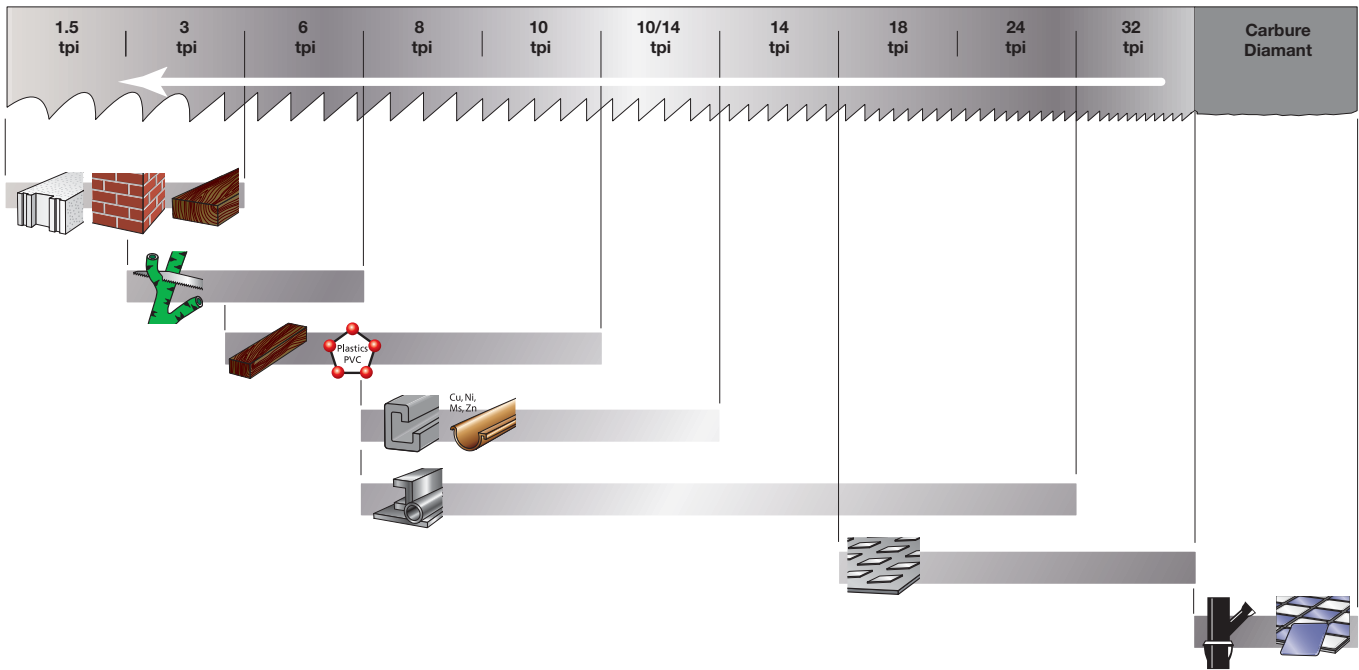


# CHOICE OF BLADE MATERIAL / APPLICATION




# CHOICE OF SAW LENGTH

Blade length: material thickness + 50 mm  
 Always keep 2 or 3 teeth in the material.

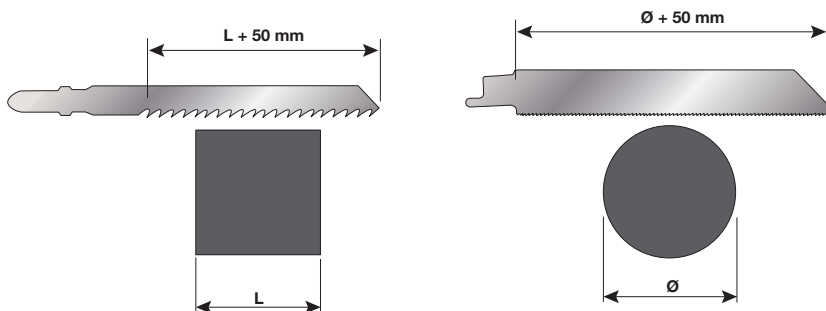


# GLOSSARY PICTOGRAM

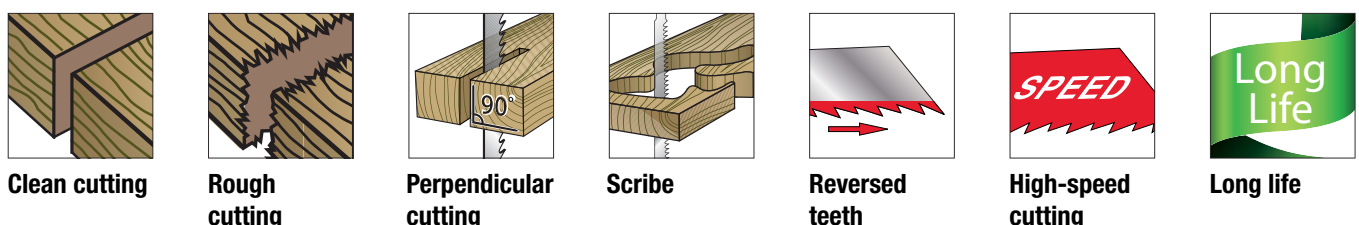




# KIND OF TOOTHING

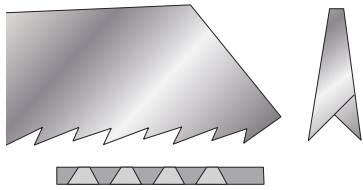

Grinded (or sharpened) teeth,  
conically ground blade.

## FAST CUT AND CLEAN


- The perfect aligned teeth allows a fast, precise and straight cut.
- The conical body of the blade leaves a gap between material and blade. Because of the gap, the chips get off and the blade cuts fast.

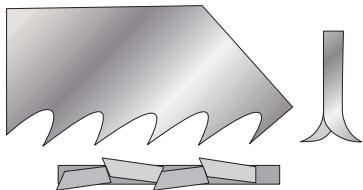

Grinded (or sharpened) and  
side set teeth.

## FAST AND ROUGH CUT


- The sharpened teeth cut the wood fibres that warranties a high speed cut especially adapted to wood cutting.



Milled and side set teeth.

## FAST AND ROUGH CUT

- The milled and side set teeth cut roughly with high speed in wood, aluminium, non-ferrous metals and plastics.

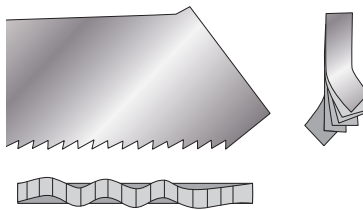


Milled and wavy set teeth.


## CLEAN AND THIN CUT

- The milled and wavy set teeth keep contact with the material to cut, avoiding jerks and allowing thin and straight cut in thin material boards.

# TEETH DIRECTION




Regular tooting  
On Pull



Reverse tooting  
On Push  
Very clean and splinter-  
proof surface cut

# DOUBLE TEETH



Ideal for curved cutting

find all the  
videos on  
our chain  
**YouTube**

# TYPES OF SAW



## HSS

High quality high-speed steel. Allows high-speed cutting. Offers **high resistance to wear**. Designed for **hard materials**.

## HCS CV

Steel alloy with carbon, chromium and vanadium. Chromium offers greater **corrosion resistance**. Vanadium increases the **heating capacity**. Designed for **soft materials**.

## CARBURE

## CARBIDE


There are three types of carbide saws : carbide-encrusted saws, saws with added carbide teeth or saws with added carbide strips. Carbide blades show **high performance and make it possible to cut hard and/or abrasive materials**.

## DIAM

The DIAM blades are diamond gritted. These blades especially suit very **hard and/or abrasive materials** like composite materials.

## Bi Metal FLEX

Bimetal refers to an item made of an assembly of two distinct types of steel, as opposed to alloys. The structure gives saw blades the best combination of cutting speed and durability, because the benefits of each type of steel are used where they are valuable : **the teeth are harder and offer high cutting performance, and the blade is more flexible, harder to break and stronger. The life of bimetal saws is twice to ten times** that of HSS or HCS blades.

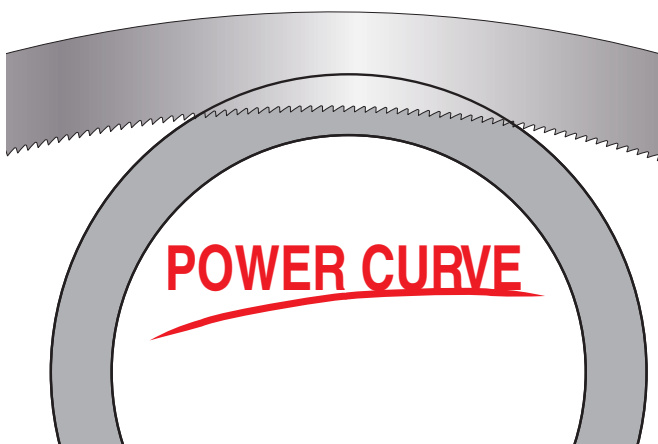

The latest design of a curved blade shape perfectly supports the natural orbital movement of the reciprocating saws thus allowing a high power transmission. Likewise the teeth are cutting into the work piece with the best angle possible based on the curved blade. They saw more effectively and thus achieve a better removal of the splints and a slower wearing down. You can perfectly utilize the length of the blade: there are up to additionally 10% of the teeth cutting into the work piece compared to a straight blade of the same length.

### Benefits:

**Faster working : cutting speed increased by up to 30%, more cuts: longer lifetime up to 25% compared to those blades with a straight shape.**

# BRANDS SAW BLADES COMPATIBILITY



## JIGSAW BLADES

| DIAGER     | AEG    | BOSCH / Alternative             | FESTOOL      | LENOX     | MAKITA     | METABO | MILWAUKEE  | ULTRA / Alternative |
|------------|--------|---------------------------------|--------------|-----------|------------|--------|------------|---------------------|
| L000W5     | 373083 | T101AIF / T101AOF & T101BIF     | –            | –         | P31566     | 23948  | –          | 8067                |
| L001W5     | 254071 | T111C / T119B                   | –            | 410S      | B13/A85656 | 23632  | 48-42-5220 | 8003                |
| L002W5     | 254061 | T101B                           | S75/2,5      | 450S      | B11/A85634 | 23634  | 48-42-5240 | 8001                |
| L003W5     | 346079 | T101BR                          | –            | 450SR     | B19/A85715 | 23650  | 48-42-5540 | 8018                |
| L004W5     | –      | T101BF & T101BRF                | HS75/3 Bi FC | –         | –          | –      | –          | 8620 & 8008         |
| L005W5     | –      | T119B0                          | –            | –         | –          | –      | –          | 8015                |
| L006W5     | 274351 | T101D                           | –            | 456S      | B12/A85640 | 23635  | 48-42-5500 | 8002                |
| L007W5     | 373080 | T101DP                          | 575/4FS      | –         | –          | 23655  | –          | 8002                |
| L008W5     | –      | T308B                           | –            | –         | –          | –      | –          | –                   |
| L012W5     | –      | T234X / T102BF BIM              | –            | –         | –          | 23675  | –          | 8084                |
| L009W5     | 399306 | T301CD                          | –            | –         | B10/A85628 | 23654  | –          | 8022                |
| L010WL1005 | 213116 | T144D / T144DF & T144DP & T244D | S75/4        | 406S      | B16/A85684 | 23633  | 48-42-5421 | 8006 / 8021 / 8601  |
| L010WL1325 | 311633 | T344D / T344DF                  | S105/4       | –         | L2/P06454  | 23678  | –          | 8024 / 8023         |
| L010WL1805 | 354745 | T744D                           | –            | 686S      | A86315     | 23603  | –          | 8080                |
| L011W5     | 265312 | T 244 D                         | –            | –         | P31572     | –      | –          | 8007                |
| L01255     | –      | T123XF / T123X & T345X & T345XF | –            | –         | –          | –      | –          | –                   |
| L000M5     | 340011 | T118AF / T118A & T218A          | HS60/1,2BI   | 318S/324S | P47226     | 23971  | 48-42-5161 | 8033 / 8009         |
| L001M5     | 340012 | T118BF / T101A & T118B          | HS60/2bi     | 314S      | P47232     | 23973  | 48-42-5190 | 8028                |
| L002M5     | 274654 | T318AF                          | HS105/1,2BI  | 518S      | P47204     | 23978  | 48-42-5166 | 8016 / 8019         |
| L003M5     | 274653 | T318BF                          | HS105/2bi    | –         | P47210     | 23979  | 48-42-5192 | 8020 / 8016         |
| L004M5     | 340014 | T127D & T227D                   | HS75/3bi     | –         | –          | 23974  | 48-42-5850 | 8013                |
| L005M2     | 373393 | T118AHM / T118EHM               | –            | –         | P-05929    | 23662  | –          | –                   |
| LMX001     | –      | T345XF                          | –            | –         | –          | –      | –          | –                   |
| L100W5     | –      | –                               | –            | –         | –          | –      | –          | 8606 / 8603         |
| L101W5     | –      | –                               | –            | –         | –          | –      | –          | 8601                |

## RECIPROCATING SAW BLADES

| DIAGER     | AEG    | BOSCH / Alternative               | DEWALT | LENOX  | MAKITA | METABO | MILWAUKEE  | Alternative | KOPRAM |
|------------|--------|-----------------------------------|--------|--------|--------|--------|------------|-------------|--------|
| L200WL1505 | 323800 | S644D                             | DW4802 | 656R   | P47086 | 37470  | 48-00-1075 | 8924        | –      |
| L200WL3005 | 323802 | S1344D / S1111DF                  | DW4804 | 156R   | P05016 | 31472  | 48-00-1079 | 8904        | –      |
| L201WL1505 | 354775 | S611DF / S641HM & S611VF & S611DF | –      | 656R   | P05088 | –      | 48-00-5035 | 9301 / 9203 | –      |
| L201WL2255 | 354777 | S1111DF                           | –      | 956R   | –      | –      | 48-00-5036 | 9302        | –      |
| L202WL2405 | 323803 | S1531L / S1617K & S1111K          | –      | –      | P47117 | 31488  | 48-00-1077 | 8922        | –      |
| L204SL1505 | –      | S922VF                            | DW4845 | 650R   | P47014 | 31492  | 48-00-5081 | 9202        | 635R   |
| L204SL2255 | 373288 | S1122VF / S1120CF & S1122HF       | –      | –      | –      | 31495  | –          | 9205        | –      |
| L204SL2805 | –      | S1222VF                           | –      | 110R   | –      | 31407  | –          | 9112        | –      |
| L200SL3002 | –      | S 713 A                           | –      | –      | P80444 | –      | 48-00-1084 | –           | –      |
| L201SL2001 | –      | –                                 | –      | 800RDG | –      | –      | –          | 9012        | –      |
| L202SL1152 | –      | S518EHM                           | –      | –      | –      | 31817  | –          | –           | –      |
| L203SL1505 | –      | –                                 | –      | –      | –      | –      | –          | 9103        | –      |
| L203SL2255 | –      | S1234XF                           | –      | –      | –      | –      | –          | 9204        | –      |
| L205SL3001 | 373027 | S1211K                            | –      | –      | –      | –      | 48-00-1082 | –           | –      |
| L205SL4001 | 373028 | –                                 | –      | –      | –      | –      | 48-00-1083 | –           | –      |
| L206SL3001 | –      | –                                 | –      | –      | –      | –      | –          | –           | –      |
| L200ML1505 | 354789 | S922BF                            | DW4808 | 614R   | P04911 | 31491  | 48-00-5182 | 9202        | –      |
| L200ML2005 | 361345 | S1122BF                           | DW4809 | 814R   | P04927 | 31494  | –          | 9205        | –      |
| L201ML1505 | –      | –                                 | –      | –      | –      | –      | –          | 9202        | –      |
| L202ML1505 | 354792 | S922EF                            | DW4811 | 618R   | P04880 | 31454  | 48-00-5184 | 9201        | –      |
| L202ML2005 | 354793 | S1122EF                           | DW4821 | 818R   | P04933 | 31493  | –          | 9204        | –      |
| L204ML1505 | 354796 | S922AF / S522AF                   | DW4813 | 624R   | P04905 | –      | –          | 9101        | –      |
| L205ML1505 | 318127 | S922HF                            | DW4806 | 610R   | P46997 | –      | 48-00-5092 | 9104        | –      |
| L205ML2805 | –      | –                                 | –      | –      | P04983 | –      | –          | 9110        | 810R   |
| L206ML3005 | –      | S1120CF                           | –      | –      | P46981 | –      | 18-00-5710 | –           | 960R   |



# SAW BLADE SELECTION GUIDE

## Jigsaw Blades

|       |  | Materials         |                        |             |           |         |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
|-------|--|-------------------|------------------------|-------------|-----------|---------|--------------|--------|---------|-----------------|------------|----------|--|-----------|-----------------|-----------------|------------------------|-------------|--------------------|-----------|-----------------|---------|
| Ref.  |  | All types of wood | Particle board covered | Agglomerate | Hard wood | Plywood | Rolled floor | Pallet | Windows | Wood with nails | Green wood | Plastics | Plastics reinforced with carbon fibres | Plexiglas | Varicor/ cortan | Stainless steel | Tubes steel and shaped | Sheet metal | Non-ferrous metals | Aluminium | Frozen products |         |
| L000W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L001W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L002W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L003W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L004W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L005W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L006W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L007W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L008W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L012W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L009W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L010W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L011W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L012S |  |                   |                        |             |           |         |              |        |         | Optimal         |            |          |  |           |                 |                 |                        |             |                    |           |                 |         |
| L000M |  |                   |                        |             |           |         |              |        |         |                 |            |          |  |           |                 |                 | Optimal                | Optimal     | Optimal            | Optimal   | Optimal         | Optimal |
| L001M |  |                   |                        |             |           |         |              |        |         |                 |            |          |  |           |                 |                 | Optimal                | Optimal     | Optimal            | Optimal   | Optimal         | Optimal |
| L002M |  |                   |                        |             |           |         |              |        |         |                 |            |          |  |           |                 |                 | Optimal                | Optimal     | Optimal            | Optimal   | Optimal         | Optimal |
| L003M |  |                   |                        |             |           |         |              |        |         |                 |            |          |  |           |                 |                 | Optimal                | Optimal     | Optimal            | Optimal   | Optimal         | Optimal |
| L004M |  |                   |                        |             |           |         |              |        |         |                 |            | Optimal  |  |           | Optimal         |                 | Optimal                | Optimal     | Optimal            | Optimal   | Optimal         | Optimal |
| L005M |  |                   |                        |             |           |         |              |        |         |                 |            | Optimal  |  |           | Optimal         |                 | Optimal                | Optimal     | Optimal            | Optimal   | Optimal         | Optimal |
| L100W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            | Optimal  | Optimal                                |           | Optimal         |                 |                        |             |                    |           |                 |         |
| L101W |  | Optimal           | Optimal                | Optimal     | Optimal   | Optimal |              |        |         |                 |            | Optimal  | Optimal                                |           | Optimal         |                 |                        |             |                    |           |                 |         |

## Reciprocating Blades

|       |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         |         |         |         |         |         |         |
|-------|--|---------|---------|---------|---------|---------|---------|--|---------|---------|---------|------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| L200W |  | Optimal | Optimal | Optimal | Optimal | Optimal |         |  |         |         |         | Optimal    |         |         |         |         |         |         |         |         |         |         |
| L201W |  | Optimal | Optimal | Optimal | Optimal | Optimal |         |  |         |         |         | Optimal    | Optimal |         |         |         |         |         |         |         |         |         |
| L202W |  | Optimal | Optimal | Optimal | Optimal | Optimal |         |  |         |         | Optimal |            |         |         |         |         |         |         |         |         |         |         |
| L200M |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L201M |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L202M |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L204M |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L205M |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L206M |  | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |  |         | Optimal |         |            |         |         |         | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L200S |  |         |         |         |         |         |         |  |         |         |         | Occasional |         |         |         |         |         |         |         |         |         |         |
| L201S |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         |         |         |         |         |         |         |
| L202S |  |         |         |         |         |         |         |  |         |         |         | Optimal    | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L203S |  |         |         |         |         |         |         |  |         | Optimal |         |            |         |         |         | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal | Optimal |
| L204S |  |         |         |         |         |         |         |  | Optimal | Optimal | Optimal |            |         |         |         | Optimal |         |         |         |         |         |         |
| L205S |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         |         |         |         |         |         | Optimal |
| L206S |  |         |         |         |         |         |         |  |         |         |         |            |         |         |         |         |         |         |         |         |         |         |

Optimal Occasional

# Jigsaw Blades

## Materials

## Benefits

| Ref.  | Cast iron | Sandwich panel | Tile | Plaster | Insulation materials | Rubber | Leather | Ceramic, tile | Cement fibre | Clean cutting | Rough cutting | Curved cutting | Perpendicular cutting | High-speed cutting | Reversed teeth | Long life |
|-------|-----------|----------------|------|---------|----------------------|--------|---------|---------------|--------------|---------------|---------------|----------------|-----------------------|--------------------|----------------|-----------|
| L000W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Green     |
| L001W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                |           |
| L002W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                |           |
| L003W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                |           |
| L004W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Green     |
| L005W |           |                |      |         |                      |        |         |               |              | Green         |               | Green          |                       |                    |                |           |
| L006W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                |           |
| L007W |           |                |      |         |                      |        |         |               |              | Green         |               |                | Green                 |                    |                |           |
| L008W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       | Green              | Green          |           |
| L012W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       | Green              |                |           |
| L009W |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       | Green              |                |           |
| L010W |           |                |      |         |                      |        |         |               |              | Green         | Green         |                |                       | Green              |                |           |
| L011W |           |                |      |         |                      |        |         |               |              | Green         | Green         | Green          |                       | Green              |                |           |
| L012S |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Blue      |
| L000M |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Red       |
| L001M |           |                |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Red       |
| L002M |           | Red            |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Red       |
| L003M |           | Red            |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Red       |
| L004M |           | Red            |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Red       |
| L005M |           | Red            |      |         |                      |        |         |               |              | Green         |               |                |                       |                    |                | Red       |
| L100W |           |                |      |         |                      |        |         |               |              | Green         |               | Green          |                       |                    |                |           |
| L101W |           |                |      |         |                      |        |         |               |              | Green         | Green         | Green          |                       |                    |                |           |

# Reciprocating Blades

|       |      |        |  |      |       |      |      |      |  |       |  |     |       |     |  |       |
|-------|------|--------|--|------|-------|------|------|------|--|-------|--|-----|-------|-----|--|-------|
| L200W |      |        |  |      | Green |      |      |      |  | Green |  |     |       |     |  | Green |
| L201W |      |        |  |      |       |      |      |      |  | Green |  |     | Green |     |  | Green |
| L202W |      |        |  |      |       |      |      |      |  | Green |  |     |       |     |  |       |
| L200M |      |        |  |      |       |      |      |      |  | Green |  |     |       |     |  | Red   |
| L201M |      |        |  |      |       |      |      |      |  | Green |  |     |       | Red |  | Red   |
| L202M |      |        |  |      |       |      |      |      |  | Green |  |     |       | Red |  | Red   |
| L204M |      | Orange |  |      |       |      |      |      |  | Green |  |     |       |     |  | Red   |
| L205M |      |        |  |      |       |      |      |      |  | Green |  |     |       |     |  | Red   |
| L206M |      |        |  |      |       |      |      |      |  | Green |  |     |       |     |  | Red   |
| L200S |      |        |  |      |       | Blue | Blue | Blue |  | Green |  |     |       |     |  | Blue  |
| L201S | Blue |        |  | Blue |       |      |      |      |  | Green |  |     |       |     |  | Blue  |
| L202S |      |        |  |      |       |      |      |      |  | Green |  |     |       |     |  | Blue  |
| L203S |      |        |  |      |       |      |      |      |  | Green |  |     |       |     |  | Blue  |
| L204S |      |        |  |      |       |      |      |      |  | Green |  | Red |       |     |  | Blue  |
| L205S |      |        |  |      |       |      |      |      |  | Green |  |     | Blue  |     |  | Blue  |
| L206S |      |        |  |      |       |      |      |      |  | Green |  |     |       |     |  | Blue  |


Ref.  
L000W

## Soft and hard wood 2,5-20 mm

Jigsaw bimetal reverse and sharpened teeth - clean cut



Hard wood, Low density wood, Agglomerate, Rolled floor



| Qty | WL | TL | mm/tpi  | Ref.   | Gencod        | Qty |
|-----|----|----|---------|--------|---------------|-----|
| 5   | 55 | 80 | 1.90/13 | L000W5 | 3336600177710 | 1   |

Carton card


Ref.  
L001W

## Soft and hard wood 4-50 mm

Jigsaw fast cut



Low density wood, Agglomerate, Plastic



| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 3/8.5  | L001W5 | 3336600177727 | 1   |

Carton card

Ref.  
L002W

## Soft and hard wood 3-30 mm

Jigsaw clean cut



Low density wood, Wood, Plastic



| Qty | WL | TL  | mm/tpi | Ref.     | Gencod        | Qty |
|-----|----|-----|--------|----------|---------------|-----|
| 5   | 75 | 100 | 2.5/10 | L002W5   | 3336600177734 | 1   |
| 25  | 75 | 100 | 2.5/10 | L002W25  | 3336600184886 | 1   |
| 100 | 75 | 100 | 2.5/10 | L002W100 | 3336600185135 | 1   |

Carton card




Ref.  
L003W

## Wood and plastic 3-30 mm

Jigsaw reverse and sharpened teeth - clean cut



Low density wood,  
Wood, Plastic



HCS  
CV



Carton card

| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 2.5/10 | L003W5 | 3336600177741 | 1   |


Ref.  
L004W

## Wood and plastic 8-40 mm

Jigsaw bimetal



Low density wood,  
Wood, Particle board  
covered, Agglomerate,  
Plywood



Bi  
Metal  
Long  
Life




Carton card

| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 3/8.5  | L004W5 | 3336600177758 | 1   |


Ref.  
L005W

## Soft and hard wood 2,5-35 mm

Jigsaw very clean cut



Low density wood,  
Rolled floor, Particle  
board covered



HCS  
CV



Carton card

| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 2.5/10 | L005W5 | 3336600177765 | 1   |


Ref.  
L006W

## Wood and plastic 10-45 mm

Jigsaw all wood fast cut



Low density wood,  
Wood, Plastic



Carton card

| Qty | WL | TL  | mm/tpi   | Ref.    | Gencod        | Qty |
|-----|----|-----|----------|---------|---------------|-----|
| 5   | 75 | 100 | 2.5/6.35 | L006W5  | 3336600177772 | 1   |
| 25  | 75 | 100 | 2.5/6.35 | L006W25 | 3336600184923 | 1   |

Ref.  
L007W

## Wood and plastic 10-45 mm

Jigsaw fast cut



Low density wood,  
Wood, Plastic



Carton card

| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 4/6.35 | L007W5 | 3336600177789 | 1   |


Ref.  
L008W

## Chip board

Jigsaw fast and clean cut



Low density wood,  
Agglomerate, Particle  
board covered




Carton card

| Qty | WL | TL  | mm/tpi  | Ref.   | Gencod        | Qty |
|-----|----|-----|---------|--------|---------------|-----|
| 5   | 91 | 117 | 1.90/13 | L008W5 | 3336600177796 | 1   |

Ref.  
L012W

# Composite material and perspex

Jigsaw tri sharpened teeth



Low density wood,  
Wood, Plastic, Plexi-  
glass, Varicor Corian



| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 91 | 117 | 2.5/10 | L012W5 | 3336600178243 | 1   |

Carton card


Ref.  
L009W

# Wood and plastic 8-65 mm

Jigsaw long blade clean cut



Low density wood,  
Wood, Plastic



| Qty | WL  | TL  | mm/tpi | Ref.    | Gencod        | Qty |
|-----|-----|-----|--------|---------|---------------|-----|
| 5   | 105 | 132 | 3/8.5  | L009W5  | 3336600177802 | 1   |
| 25  | 105 | 132 | 3/8.5  | L009W25 | 3336600184954 | 1   |

Carton card

Ref.  
L010W

# Soft and hard wood 5-50 mm

Jigsaw rough cut



Low density wood,  
Wood



| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 5   | 75  | 100 | 4/6.35 | L010WL100S | 3336600177819 | 1   |
| 5   | 105 | 132 | 4/6.35 | L010WL132S | 3336600177826 | 1   |
| 5   | 155 | 180 | 4/6.35 | L010WL180S | 3336600177833 | 1   |

Carton card



Ref.  
L011W

## Soft and hard wood 5-50 mm

Jigsaw rough and fast cut double tothing



Low density wood,  
Wood



| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 4/6.35 | L011W5 | 3336600177840 | 1   |

Carton card


Ref.  
L100W

## Wood and plastic 3-30 mm

Jigsaw clean cut compatible Black and Decker



Low density wood,  
Wood, Plastic



| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 2.5/10 | L100W5 | 3336600177925 | 1   |

Carton card

Ref.  
L101W

## Soft and hard wood 5-50 mm

Jigsaw tough cut compatible Black and Decker



Low density wood,  
Wood




| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 4/6.35 | L101W5 | 3336600177932 | 1   |

Carton card

Ref.  
L012S

## Wood with nails

Jigsaw special nails



Wood with nails,  
Tubes steel and  
shaped



| Qty | WL | TL  | mm/tpi             | Ref.   | Gencod        | Qty |
|-----|----|-----|--------------------|--------|---------------|-----|
| 5   | 91 | 116 | 1.3/13<br>6 2.0/19 | L012S5 | 3336600177956 | 1   |

Carton card

Ref.  
LMIX

## Wood and steel

Jigsaw set 5 pcs





| Qty | Ref.    | Gencod        | Qty |
|-----|---------|---------------|-----|
| 5   | LMIX001 | 3336600177918 | 1   |

Carton card


Ref.  
L000M

## Steel and stainless steel

Jigsaw special extra thin steel sheet



Sheet metal metal,  
Tubes steel and  
shaped, Stainless steel




| Qty | WL | TL   | mm/tpi | Ref.    | Gencod        | Qty |
|-----|----|------|--------|---------|---------------|-----|
| 5   | 55 | 76.5 | 1.2/21 | L000M5  | 3336600177857 | 1   |
| 25  | 55 | 76.5 | 1.2/21 | L000M25 | 3336600185036 | 1   |

Carton card

Ref.  
L001M

## Steel, copper and aluminium

Jigsaw special aluminium and thin steel profile

Tubes steel and  
shaped, Non-ferrous  
metal, Aluminum



| Qty | WL | TL   | mm/tpi | Ref.    | Gencod        | Qty |
|-----|----|------|--------|---------|---------------|-----|
| 5   | 55 | 76.5 | 2.0/13 | L001M5  | 3336600177864 | 1   |
| 25  | 55 | 76.5 | 2.0/13 | L001M25 | 3336600185043 | 1   |

Carton card

Ref.  
L002M

## Steel and stainless steel

Jigsaw special for sandwich material

Tubes steel and  
shaped, Sheet metal,  
Sandwich panel



| Qty | WL  | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|-----|-----|--------|--------|---------------|-----|
| 5   | 105 | 132 | 1.0/25 | L002M5 | 3336600177871 | 1   |

Carton card

Ref.  
L003M

## Steel and stainless steel

Jigsaw special for sandwich material

Tubes steel and shaped,  
Sandwich panel,  
Non-ferrous materials

| Qty | WL  | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|-----|-----|--------|--------|---------------|-----|
| 5   | 105 | 132 | 1.8/14 | L003M5 | 3336600177888 | 1   |

Carton card




Ref.  
L004M

# Aluminium and stainless steel

Jigsaw special aluminium



Non-ferrous metal,  
Aluminum, Stainless  
steel




Carton card

| Qty | WL | TL  | mm/tpi | Ref.   | Gencod        | Qty |
|-----|----|-----|--------|--------|---------------|-----|
| 5   | 75 | 100 | 3/8.5  | L004M5 | 3336600177895 | 1   |



Ref.  
L005M

# Aluminium and stainless steel

2 Stainless steel jigsaw 79mm carbide strip grinded teeth for stainless steel



Tubes steel and  
shaped, Sheet metal,  
Stainless steel



Carton card

| Qty | WL | TL | mm/tpi  | Ref.   | Gencod        | Qty |
|-----|----|----|---------|--------|---------------|-----|
| 2   | 50 | 79 | 1.0/1.0 | L005M2 | 3336600177901 | 1   |

Ref.  
680

# Handle

Saw blade, screw bit



SAWING AND SCREW BITS



Blister

| Ref. | Gencod        | Qty |
|------|---------------|-----|
| 680  | 3336600187009 | 1   |


Ref.  
L201W

# Wood and plastic

Saw blade fast cut



Low density wood,  
Wood, Plastic



| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 5   | 130 | 150 | 4.2/6  | L201WL1505 | 3336600177987 | 1   |
| 5   | 205 | 225 | 4.2/6  | L201WL2255 | 3336600177994 | 1   |

Quality plastic pouch


Ref.  
L202W

# Green wood

Saw blade reinforced toothing



Green wood



HCS



| Qty | WL  | TL  | mm/tpi     | Ref.       | Gencod        | Qty |
|-----|-----|-----|------------|------------|---------------|-----|
| 5   | 220 | 240 | 6.35/5-4/5 | L202WL2405 | 3336600178007 | 1   |

Quality plastic pouch

Ref.  
L204S

# Palet and wood with nails

Saw blade with COMBO toothing



Wood with nails,  
Tubes steel and  
shaped, Pallets



| Qty | WL  | TL  | mm/tpi        | Ref.         | Gencod        | Qty |
|-----|-----|-----|---------------|--------------|---------------|-----|
| 5   | 130 | 150 | 2.5-1.8/10/14 | L204SL1505   | 3336600178014 | 1   |
| 25  | 130 | 150 | 2.5-1.8/10/14 | L204SL15025  | 3336600184619 | 1   |
| 100 | 130 | 150 | 2.5-1.8/10/14 | L204SL150100 | 3336600184831 | 1   |
| 5   | 205 | 225 | 2.5-1.8/10/14 | L204SL2255   | 3336600178021 | 1   |
| 5   | 250 | 280 | 2.5-1.8/10/14 | L204SL2805   | 3336600178038 | 1   |

Quality plastic pouch


Ref.  
L200W

# Plaster and cement fiber

## Saw blade special plaster



Low density wood,  
Wood, Plastic, Plas-  
ter, Cement fibre



| Qty | WL  | TL  | mm/tpi | Ref.         | Gencod        | Qty |
|-----|-----|-----|--------|--------------|---------------|-----|
| 5   | 130 | 150 | 4.2/6  | L200WL1505   | 3336600177963 | 1   |
| 25  | 130 | 150 | 4.2/6  | L200WL15025  | 3336600184428 | 1   |
| 100 | 130 | 150 | 4.2/6  | L200WL150100 | 3336600184640 | 1   |
| 5   | 280 | 300 | 4.2/6  | L200WL3005   | 3336600177970 | 1   |



Quality plastic pouch


Ref.  
L200S

# Insulation material

## Saw blade with variable toothing



Insulation material,  
Leather, Rubber, Paper-  
board, Insulation material



| Qty | WL  | TL  | Ref.       | Gencod        | Qty |
|-----|-----|-----|------------|---------------|-----|
| 2   | 280 | 300 | L200SL3002 | 3336600178137 | 1   |



Quality plastic pouch

Ref.  
L201S

# Cast iron, brick and ceramic

## Saw blade with diamond carbide gritted



Cast iron, Brick,  
Tile, Hollow brick,  
Ceramic tile



| Qty | WL  | TL  | Ref.       | Gencod        | Qty |
|-----|-----|-----|------------|---------------|-----|
| 1   | 180 | 200 | L201SL2001 | 3336600178144 | 1   |



Quality plastic pouch



Ref.  
L202S

## Stainless steel and steel

Saw blade with carbide teeth



Stainless steel, Sheet metal, Tubes steel and shaped, Plastics, reinforced, Plexiglass



| Qty | WL | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|----|-----|--------|------------|---------------|-----|
| 2   | 95 | 115 | 1.4/18 | L202SL1152 | 3336600178151 | 1   |

Quality plastic pouch


Ref.  
L205S

## Ice

Saw blade with stainless steel



Frozen products



| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 1   | 280 | 300 | 6.35/4 | L205SL3001 | 3336600185913 | 1   |
| 1   | 380 | 400 | 6.35/4 | L205SL4001 | 3336600185920 | 1   |

Quality plastic pouch

Ref.  
L206S

## Brick and tile

Saw blade with carbide teeth



Brick, Tile, Hollow brick, Cement fibre



| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 1   | 280 | 300 | 17/1.5 | L206SL3001 | 3336600185944 | 1   |
| 1   | 380 | 400 | 17/1.5 | L206SL4001 | 3336600187160 | 1   |

Quality plastic pouch


Ref.  
L203S

# Steel, copper and aluminium

Saw blade with Twin cut



Tubes steel and shaped,  
Non-ferrous materials,  
Aluminum, Sheet metal



| Qty | WL  | TL  | mm/tpi        | Ref.       | Gencod        | Qty |
|-----|-----|-----|---------------|------------|---------------|-----|
| 5   | 130 | 150 | 2.5-1.8/10/14 | L203SL1505 | 3336600178168 | 1   |
| 5   | 205 | 225 | 2.5-1.8/10/14 | L203SL2255 | 3336600178175 | 1   |

Quality plastic pouch


Ref.  
L206M

# Steel and wood with nails

Saw blade special demolition



Tubes steel and  
shaped, Wood, Wood  
with nails



| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 5   | 280 | 300 | 2.5/10 | L206ML3005 | 3336600185937 | 1   |

Quality plastic pouch


Ref.  
L200M

# Steel, sheet metal and copper

Saw blade special steel sheet and pipe



Tubes steel and  
shaped, Non-ferrous  
materials, Sheet  
metal



| Qty | WL  | TL  | mm/tpi | Ref.         | Gencod        | Qty |
|-----|-----|-----|--------|--------------|---------------|-----|
| 5   | 130 | 150 | 1.8/14 | L200ML1505   | 3336600178045 | 1   |
| 25  | 130 | 150 | 1.8/14 | L200ML15025  | 3336600184473 | 1   |
| 100 | 130 | 150 | 1.8/14 | L200ML150100 | 3336600184695 | 1   |
| 5   | 180 | 200 | 1.8/14 | L200ML2005   | 3336600178052 | 1   |
| 25  | 180 | 200 | 1.8/14 | L200ML20025  | 3336600184480 | 1   |
| 100 | 180 | 200 | 1.8/14 | L200ML200100 | 3336600184701 | 1   |

Quality plastic pouch


Ref.  
L201M

# Steel, sheet metal and copper

Saw blade fast cut



Tubes steel and shaped,  
Non-ferrous materials,  
Sheet metal




| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 5   | 130 | 150 | 1.8/14 | L201ML1505 | 3336600178069 | 1   |

Quality plastic pouch

Ref.  
L202M


# Tube steel and shaped

Saw blade special steel sheet & pipe



NIROSTA  
STAINLESS  
INOX

Tubes steel and  
shaped, Sheet metal,  
Stainless steel



| Qty | WL  | TL  | mm/tpi | Ref.        | Gencod        | Qty |
|-----|-----|-----|--------|-------------|---------------|-----|
| 5   | 130 | 150 | 1.4/18 | L202ML1505  | 3336600178076 | 1   |
| 5   | 180 | 200 | 1.4/18 | L202ML2005  | 3336600178083 | 1   |
| 25  | 180 | 200 | 1.4/18 | L202ML20025 | 3336600184510 | 1   |

Quality plastic pouch






Ref.  
L204M


## Steel and metal sheet

Saw blade special extra thin steel sheets



NIROSTA  
STAINLESS  
INOX

Tubes steel and  
shaped, Sheet metal,  
Stainless steel



| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 5   | 130 | 150 | 1.0/24 | L204ML1505 | 3336600178106 | 1   |

Quality plastic pouch


Ref.  
L205M

## Steel and copper

Saw blade special thick pipe and steel sheets



Tubes steel and  
shaped, Non-ferrous  
materials



| Qty | WL  | TL  | mm/tpi | Ref.       | Gencod        | Qty |
|-----|-----|-----|--------|------------|---------------|-----|
| 5   | 130 | 150 | 2.5/10 | L205ML1505 | 3336600178113 | 1   |
| 5   | 260 | 280 | 2.5/10 | L205ML2805 | 3336600178120 | 1   |

Quality plastic pouch



# TEXTILE



LONG SLEEVES  
POLO



DOWN JACKET



HOODED  
JACKET

| Features                              | Ref.             |
|---------------------------------------|------------------|
| DIAGER CAP                            | GDBCASQUETTE     |
| DIAGER HAT                            | GDBBONNET        |
| DIAGER T-SHIRT, SIZE M                | GDBTSM           |
| DIAGER T-SHIRT, SIZE L                | GDBTSL           |
| DIAGER T-SHIRT, SIZE XL               | GDBTSXL          |
| DIAGER SHORT SLEEVES POLO, SIZE S     | GDBPOLOS         |
| DIAGER SHORT SLEEVES POLO, SIZE M     | GDBPOLOM         |
| DIAGER SHORT SLEEVES POLO, SIZE L     | GDBPOLOL         |
| DIAGER SHORT SLEEVES POLO, SIZE XL    | GDBPOLOXL        |
| DIAGER SHORT SLEEVES POLO, SIZE XXL   | GDBPOLOXXL       |
| DIAGER LONG SLEEVES POLO, SIZE S      | GDBPOLOMLS       |
| DIAGER LONG SLEEVES POLO, SIZE M      | GDBPOLOMLM       |
| DIAGER LONG SLEEVES POLO, SIZE L      | GDBPOLOMLL       |
| DIAGER LONG SLEEVES POLO, SIZE XL     | GDBPOLOMLXL      |
| DIAGER LONG SLEEVES POLO, SIZE XXL    | GDBPOLOMLXXL     |
| DIAGER SLEEVELESS SOFTSHELL, SIZE S   | GDBSOFTSHELLS    |
| DIAGER SLEEVELESS SOFTSHELL, SIZE M   | GDBSOFTSHELLM    |
| DIAGER SLEEVELESS SOFTSHELL, SIZE L   | GDBSOFTSHELLL    |
| DIAGER SLEEVELESS SOFTSHELL, SIZE XL  | GDBSOFTSHELLXL   |
| DIAGER SLEEVELESS SOFTSHELL, SIZE XXL | GDBSOFTSHELLXXL  |
| DIAGER SOFTSHELL JACKET, SIZE S       | GDBVESTES        |
| DIAGER SOFTSHELL JACKET, SIZE M       | GDBVESTEM        |
| DIAGER SOFTSHELL JACKET, SIZE L       | GDBVESTEL        |
| DIAGER SOFTSHELL JACKET, SIZE XL      | GDBVESTEXL       |
| DIAGER SOFTSHELL JACKET, SIZE XXL     | GDBVESTEXXL      |
| DIAGER BODYWARMER, SIZE S             | GDBBODYWARMERS   |
| DIAGER BODYWARMER, SIZE M             | GDBBODYWARMERM   |
| DIAGER BODYWARMER, SIZE L             | GDBBODYWARMERL   |
| DIAGER BODYWARMER, SIZE XL            | GDBBODYWARMERXL  |
| DIAGER BODYWARMER, SIZE XXL           | GDBBODYWARMERXXL |
| DIAGER DOWN JACKET, SIZE S            | GDBDOUDOUNES     |
| DIAGER DOWN JACKET, SIZE M            | GDBDOUDOUNEM     |
| DIAGER DOWN JACKET, SIZE L            | GDBDOUDOUNEL     |
| DIAGER DOWN JACKET, SIZE XL           | GDBDOUDOUNEXL    |
| DIAGER DOWN JACKET, SIZE XXL          | GDBDOUDOUNEXXL   |
| DIAGER HOODED JACKET, SIZE S          | GDBVESTECAPS     |
| DIAGER HOODED JACKET, SIZE M          | GDBVESTECAPM     |
| DIAGER HOODED JACKET, SIZE L          | GDBVESTECAPL     |
| DIAGER HOODED JACKET, SIZE XL         | GDBVESTECAPXL    |
| DIAGER HOODED JACKET, SIZE XXL        | GDBVESTECAPXXL   |



SOFTSHELL  
JACKET



SLEEVELESS  
SOFTSHELL



BODYWARMER



CAP



SHORT SLEEVES  
POLO



HAT



# INFORMATION SHOP



Ref. GORIDIAGER

Ref. M00195



## Features

## Ref.

|                                |            |
|--------------------------------|------------|
| DIAGER INFLATABLE TENT 3X3     | M00174     |
| DIAGER ARCH                    | M00195     |
| DIAGER FLOOR MATS TO CUSTOMIZE | M00194     |
| DIAGER BEACH FLAG              | GORIDIAGER |
| DIAGER BANNER                  | B00503     |
| DIAGER TABLECLOTH              | M00187     |
| DIAGER POSTER                  | D00320     |
| BOOSTER PLUS POSTER            | D00307     |
| ULTIMAX 646 POSTER             | D00305     |
| SPEEDUSTER POSTER              | D00306     |



Ref. D00307



Ref. D00305




Ref. B00503



# DRILL CENTER

## A SPECIFIC SPACE DESIGNED FOR DIAGER PRODUCTS

The aim of the DRILL CENTER is to distinguish the products geographically and visually in selling location. The concept is composed of several sales shelf forming a sales pole chartered, the customer then visualizes the entire product range DIAGER.

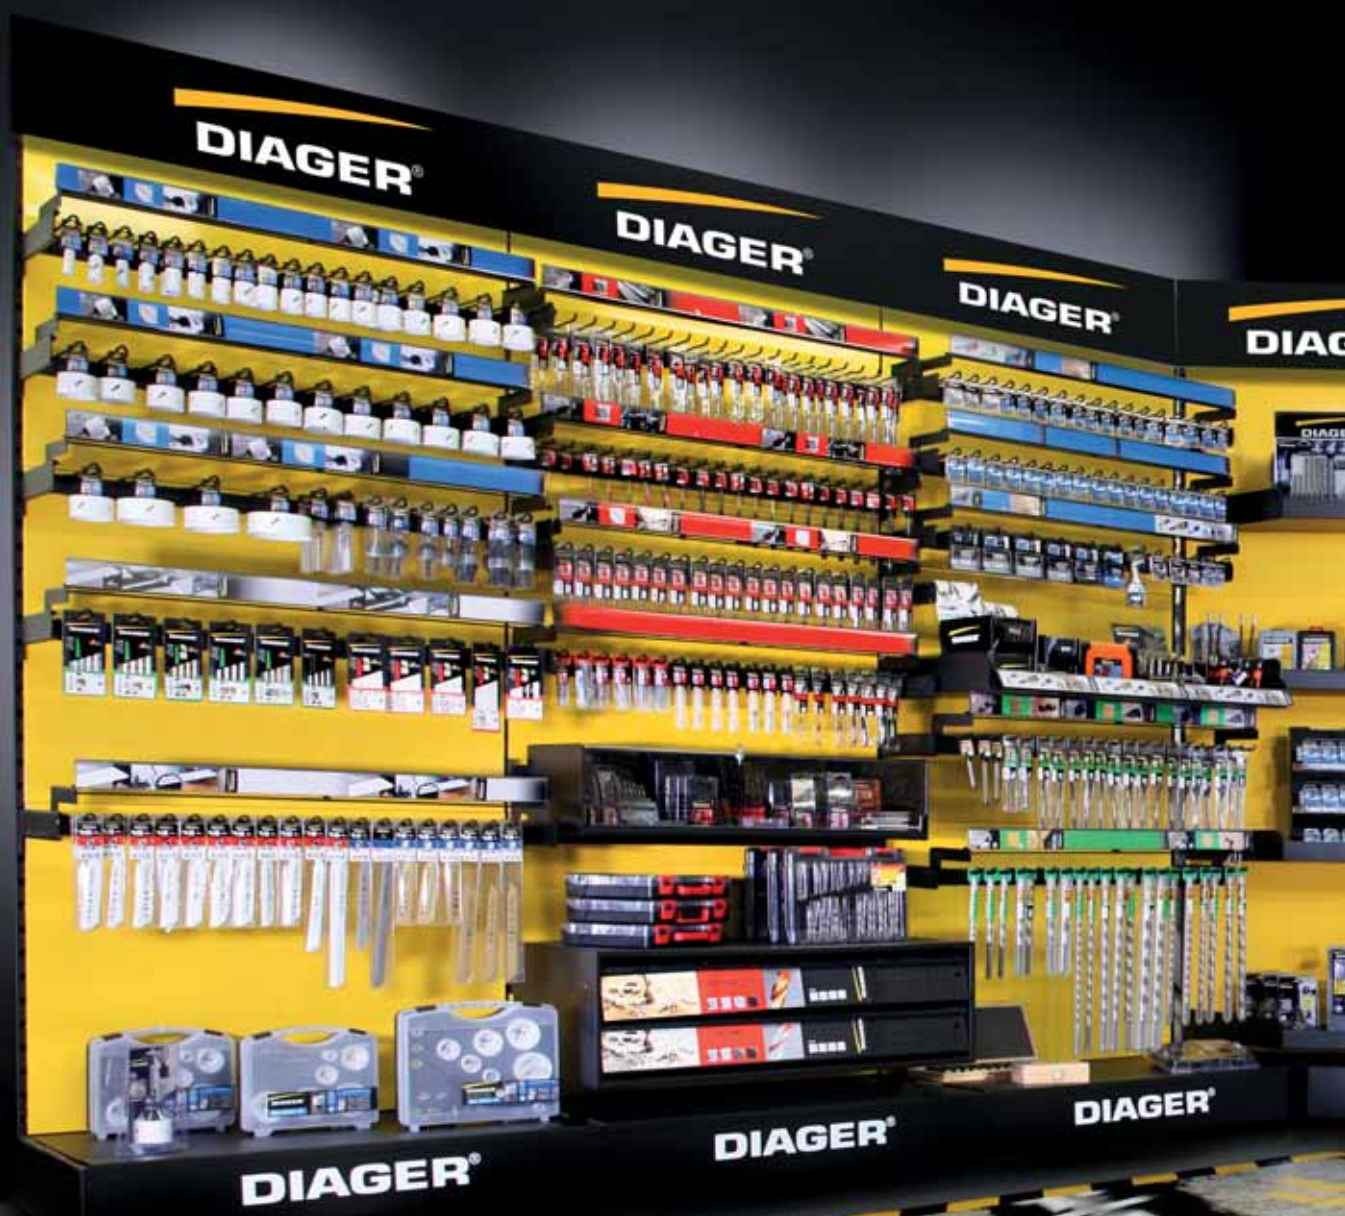

| Features   | Ref.       | Gencod        |
|--|------------|---------------|
| CORNER   | GONDCORNER | 3336609008671 |
| SHELF FOR CORNER   | M00193     | 3336609008688 |
| NEXT SALES SHELF 1M (to attribute with the pediment of your choice)              | GOND1001   | 3336609000033 |
| DIAGER LUMINAR PEDIMENT FOR GOND1001   | M00202     | 3336609009500 |
| ELECTRIC CABLE FOR LUMINAR PEDIMENT (to attribute with each command of pediment) | CORDON     | 3336600187528 |

Accessories of presentation (rack, showcase, shelf ...) the same to those used on high sales shelf.  
Background Golden yellow sales shelf coated in material backgrounds.



# 6 METERS DISPLAY

A COMPLETE RANGE OF  
ELECTROPORTATIVE ACCESSORIES





# CONCEPT STORE

## DRI LLING SPECIALIST

Planograms including Concrete drilling ranges, Accessories



0.5 M CONCRETE SPECIALIST



1 M CONCRETE SPECIALIST



2 M CONCRETE SPECIALIST



1 M WOOD RANGE



1 M METAL RANGE




1 M SAWING AND SCREW BITS RANGE

ADDITIONAL RANGES





# D R I L L I N G G E N E R A L I S T

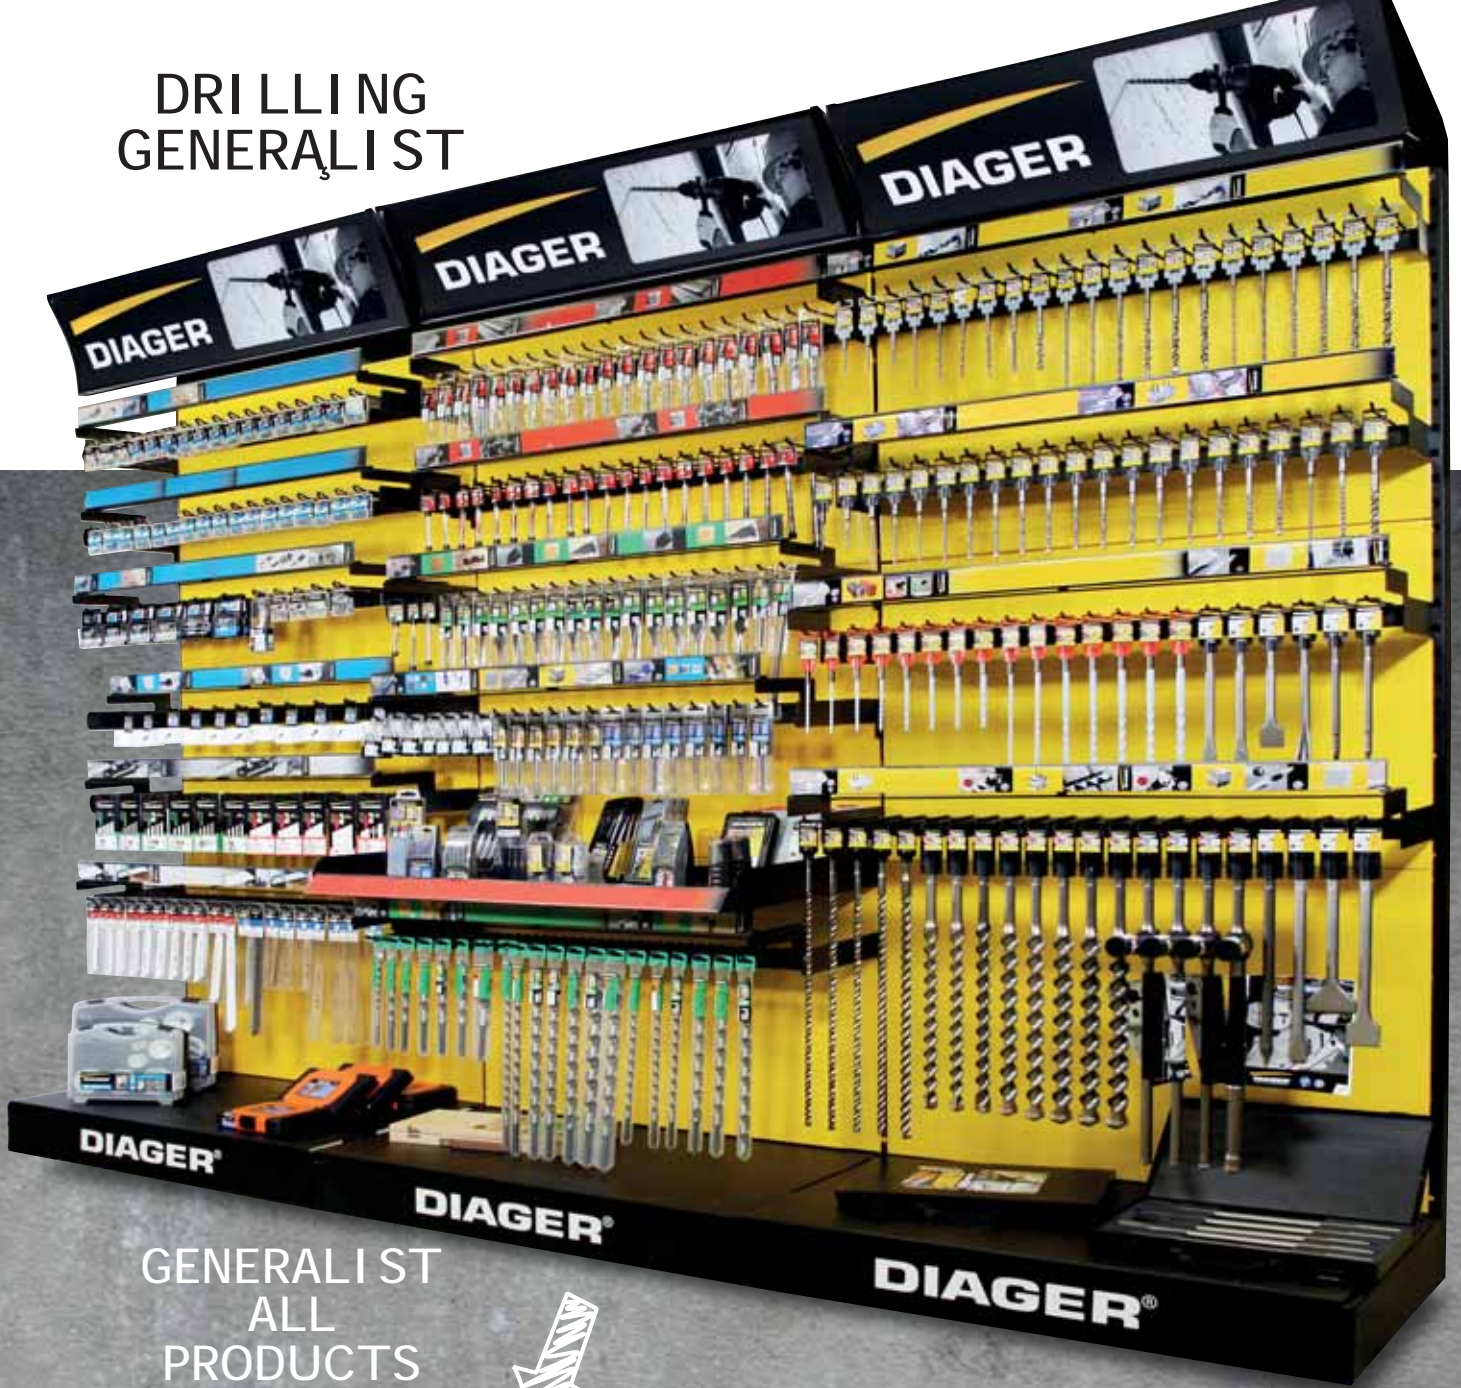

## GENERALIST ALL PRODUCTS

Planograms including drilling ranges  
Concrete, Metal, Wood, Accessories,  
Sawing and Screw bits



2 M GENERALIST RANGE  
ALL PRODUCTS



1 M GENERALIST



2 M GENERALIST



# STORE CONCEPT LOW SALES SHELF



## LOW SALES SHELF ISLAND, FRONT-BACK, Delivered in kit to assemble

Allows positioning in the " low " areas of the Self-Service Presentation accessories (rack, showcase, shelf...) identical to those used on the high sales shelf.

The kit includes: 1 base on wheels, 1 welcoming metal structure 2 bottom grids. Possibility to dress the grids with the magnetic yellow gold Funds (to be positioned on the metal structure, location foreseen).

| Features                             | Ref.   | Gencod        |
|--------------------------------------|--------|---------------|
| LOW SALES SHELF STRUCTURE FRONT-BACK | M00188 | 3336609008312 |
| DIAGER PEDIMENT                      | M00189 | 3336609008329 |
| DIAGER REMOVABLE SIDEBAND            | M00190 | 3336609008336 |
| SALES SHELF HEAD FOR LOW SALES SHELF | M00192 | 3336609008701 |



# P.O.S ADVERTISING CONCEPT



## LOW SALS SHELF ISLAND, FRONT-BACK, Delivered assembled

To animate your sales, mobile display that can be put in place in sales sheff t head gold in the middle of the shop.  
 Product implementation in front and back on hooks and shelves.  
 Fixed showcase with lock.  
 Supplied accessories : 30 hooks and 2 shelves.  
 (Pediment marks to put).

| Features                  | Ref.   | Gencod        |
|---------------------------|--------|---------------|
| P.O.S ADVERTISING CONCEPT | M00161 | 3336609006035 |



# SALES ANIMATION



| Features                       | Ref.   | Gencod        |
|--------------------------------|--------|---------------|
| ULTIMAX P.O.S                  | C00102 | 3336609006899 |
| SPEEDUSTER P.O.S               | C00103 | 3336609006905 |
| ULTIMAX/SPEEDUSTER mixed P.O.S | C00104 | 3336609006912 |




# LIST OF FURNITURE

| Features  | Ref.          | Gencod        | Visual |
|---|---------------|---------------|--------|
| 1M SALES SHELF<br>(to attribute with the pediment of your choice)   | GOND1000      | 3336609000019 | 1      |
| 1M SALES SHELF to be connected with GOND1000 (to attribute with the pediment of your choice)                                      | GOND1001      | 3336609000033 | -      |
| 0,5M SALES SHELF<br>(to attribute with the pediment of your choice)   | GOND500       | 3336609000071 | -      |
| LUMINAR PEDIMENT FOR GOND1000/1<br>(to attribute with the banner, see list of your choice)  | M00202        | 3336609009500 | 2      |
| LUMINAR PEDIMENT FOR GOND500<br>(to attribute with the banner, see list of your choice)   | M00203        | 3336609009975 | 3      |
| ELECTRIC CABLE FOR LUMINAR PEDIMENT<br>(to attribute with each command of pediment / 1 only by command even if several pediments) | CORDON        | 3336600187528 | 4      |
| DIAGER PEDIMENT FOR GOND1000/1  | FR1000        | 3336609005472 | 6      |
| DIAGER PEDIMENT FOR GOND 500  | FR500         | 3336609005373 | 7      |
| BOX WITH WHEELS 1M  | M00124        | 3336609004253 | 8      |
| BOX 1M BLACK  | M00185        | 3336609008220 | 10     |
| BOX 1,33M YELLOW  | M00127        | 3336609007322 | -      |
| YELLOW BACKGROUND WIDTH 1M  | TOLE          | 3336609009524 | 11     |
| YELLOW PERFORATED WIDTH 1M  | TOLEPERF      | 3336609008282 | 12     |
| LAYING OUT LOW OF SALES SHELF 1M  | M00145        | 3336609005731 | 13     |
| ADJUSTABLE RACK 1M 20 DOUBLE HOOKS  | RAT1000DOUBLE | 3336609002211 | 14     |
| ADJUSTABLE RACK 0,5M 10 DOUBLE HOOKS  | RAT500        | 3336609000088 | 16     |
| ADJUSTABLE RACK WITHOUT HOOKS 1M (to attribute with hooks M00151-2, max 17)   | M00150        | 3336609004468 | 17     |
| ADJUSTABLE RACK WITHOUT HOOKS 1,33M (to attribute with hooks M00151-2, max 26)  | M00159        | 3336609005984 | -      |
| ADJUSTABLE RACK WITHOUT HOOKS 0,50M (to attribute with hooks M00151-2, max 10)  | M00158        | 3336609005793 | -      |
| DOUBLE HOOK   | M00151        | 3336609004475 | 18     |
| SIMPLE HOOK   | M00152        | 3336609004482 | 19     |
| ANTI-THEFT 1M   | ANTIVOL1000   | 3336609002037 | 20     |
| ANTI-THEFT 0,5M   | ANTIVOL500    | 3336609004291 | -      |
| ANTI-THEFT FOR HOOK   | M00169        | 3336609006745 | 21     |
| SUPPORT FOR BAR FOR REMOVABLE HOOK PE 500   | SPE500        | 3336609000101 | 22     |
| SHELF FOR SETS 0,5M<br>(to attribute with 1 BAR1000)  | SCOFF         | 3336609000064 | 23     |
| ADJUSTABLE SHELF WIDTH 900mm<br>DEPTH 360mm   | M00167        | 3336609006141 | 24     |
| ADJUSTABLE SHELF WIDTH 1M   | TAB1000500    | 3336609000163 | 25     |
| ADJUSTABLE SHELF WIDTH 1250mm DEPTH 360mm   | M00168        | 3336609006158 | -      |
| ADJUSTABLE SHELF WIDTH 0,5M   | TAB500400     | 3336609000170 | -      |
| STORAGE UNIT WITH 2 DRAWERS<br>(to attribute with 2 BAR1000)  | M00170        | 3336609006806 | 26     |

| Features   | Ref.      | Gencod        | Visual |
|--|-----------|---------------|--------|
| DISPLAY CASE<br>(to attribute with 1 BAR1000)                    | M00157    | 3336609005274 | 27     |
| 1M STAY FOR 1M SALES SHELF                                       | BAR1000   | 3336609000057 | 29     |
| 1,33M STAY FOR 1,33M SALES SHELF                                 | BAR1300   | 3336609000125 | -      |
| 0,5M STAY FOR 0,5M SALES SHELF                                   | BAR500    | 3336609000095 | 30     |
| REVOLVING DISPLAY<br>(to attribute with X hooks M00139)          | M00129    | 3336609004352 | 31     |
| STAND FOR REVOLVING DISPLAY                                      | M00130    | 3336609004369 | 32     |
| BRACKET FOR REVOLVING DISPLAY<br>(to attribute with 2 BAR1000)   | M00137    | 3336609004376 | 33     |
| BRACKET for installation on rack                                 | M00204    | 3336609010476 | 33     |
| PIN FOR PERFORATED METAL SHEET                                   | M00113    | 3336609000620 | 34     |
| HOOK FOR CONSUMER INFORMATION                                    | STOPRAYON | 3336609000149 | 35     |
| PR 24 DISPLAY - STRUCTURE ONLY<br>(delivered flat)               | M00135    | 3336609007643 | 36     |
| 6 HOOKS RACK   | M00101    | 3336609008640 | 37     |
| COMMUNICATION KIT DIAGER<br>(pediment + Sideband)                | M00107    | 3336609008657 | -      |
| MONOBLOC DISPLAY - STRUCTURE ONLY                                | M00171    | 3336609006844 | -      |
| CROSS-MERCHANDISING DISPLAY                                      | M00205    | 3336609010483 | -      |
| HOOK FOR CORE BIT 1/2  | M00122    | 3336609004338 | 41     |
| HOOK FOR CORE BIT 1-1/4  | M00123    | 3336609004345 | 42     |
| HOOK FOR DIAMOND DISK<br>(to attribute with 1 BAR1000 for max.8) | M00118    | 3336609004307 | 43     |
| ANTI-THEFT FOR DIAMOND DISK                                      | M00119    | 3336609004314 | 44     |
| BIN WITH REMOVAL DIVIDER<br>(Width 500mm x Depth 500mm)          | M00197    | 3336609008909 | -      |
| DISPLAY HSS COUNTER  | M00087    | 3336609000194 | 45     |
| STAND COUNTER (delivered with 2 shelfies)                        | C00085    | 3336609005397 | 46     |
| HOOK FOR STAND COUNTER C00085<br>(9 per display max)             | C00087    | 3336609005670 | 47     |
| CARDBOARD P.O.S FOR SETS PRESENTATION                            | C00107    | 3336609007308 | 48     |
| COUNTER SDS-PLUS P.O.S (48pcs)                                   | C00115    | 3336600201804 | -      |
| CARPET 1ML   | M00184    | 3336609008169 | -      |

\*Declined in several formats

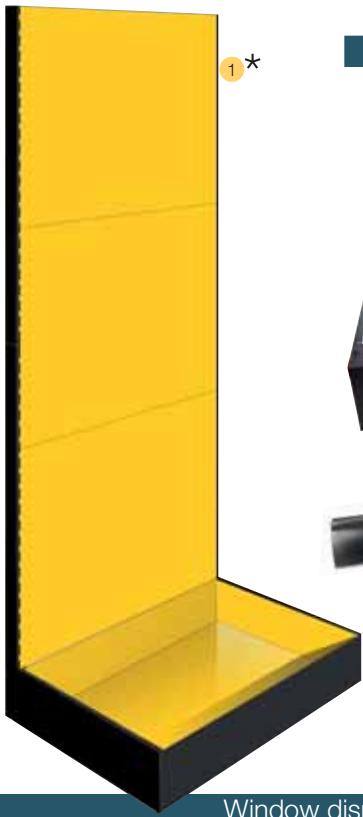

1\*

Pediment

Down and up box



Window display

Shelf



27



23




24\*

Background

Racks



11

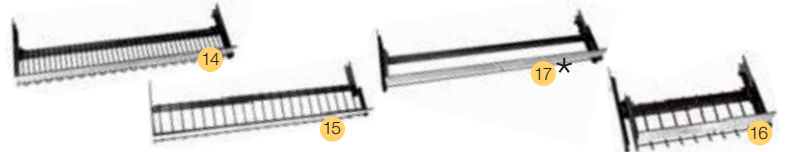

14

15

17\*

16



12

Anti-theft



20\*

21

43

44

Stay for sales shelf and hooks



29\*

18

19

22

Modular stand

Special Core bit



46

45

47

48

36

37



41



42

Divers

Revolving display



25

35

31

32

33

34

# SERVICE PACK



## ON LINE

Advice, Orders, Follow ups, etc.  
A dedicated service from 8 am to 12.30 pm (noon) and 1.30 pm to 5.30 pm.



## ASSISTANCE ON SITE

Our team of sales promoters are with you on-site every step of the way to help you with the technical and specific requests of your customers. In the field, they will help you choose the most suitable product for your applications and offer advice and demonstrations on tools.



## PRODUCT EXPERTISE

Diager provides you with all of its human and technical resources.

DIAGER Experts :

- Analyse products problems.
- Provide new solutions.
- Intervene on the sites.



## TRAINING

Technical skill is necessary for our shared success, so that's why DIAGER's teams are available to help you on a daily basis, advise you and provide theory and practical training sessions.

DIAGER reserves the sale of its products to professional distributors according to its general terms and conditions of sale that comply with article L 441-7 of the Code of Mercantile law. The data contained in this catalogue are those known upon its date of publication and are subject to change. Photographs are non-binding.

Diager uses PEFC certified paper for catalog printing.



*find all the videos on our chain*



Watch the videos is an excellent way to discover the features and strenghts of our products.

Meeting on [www.youtube.com/DiagerTerrain](http://www.youtube.com/DiagerTerrain).



# FIND US ON SOCIAL MEDIA



## FOLLOW US !

**INSTAGRAM**


@diager\_official

**FACEBOOK**

facebook.com/diagersas/

**LINKEDIN**

linkedin.com/company/diager/

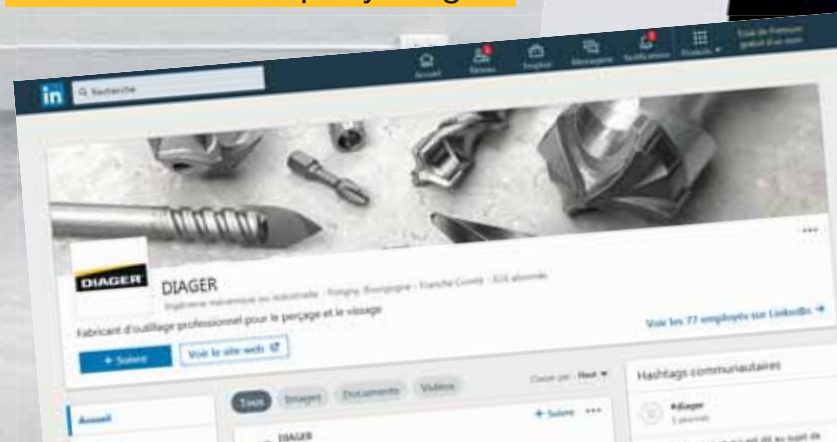



# DIAGER<sup>®</sup>

PROFESSIONAL TOOLS MANUFACTURER

FOLLOW US !



INSTAGRAM  
[@diager\\_official](#)



FACEBOOK  
[facebook.com/diagersas](#)



LINKEDIN  
[linkedin.com/company/diager](#)



YOUTUBE  
[youtube.com/diager](#)

Rue Henri Moissan  
BP 90149  
39802 POLIGNY Cedex 2  
FRANCE

Tel. +33 (0)3 84 73 74 75  
Fax +33 (0)3 84 73 74 76

[contact@diager.com](mailto:contact@diager.com)